

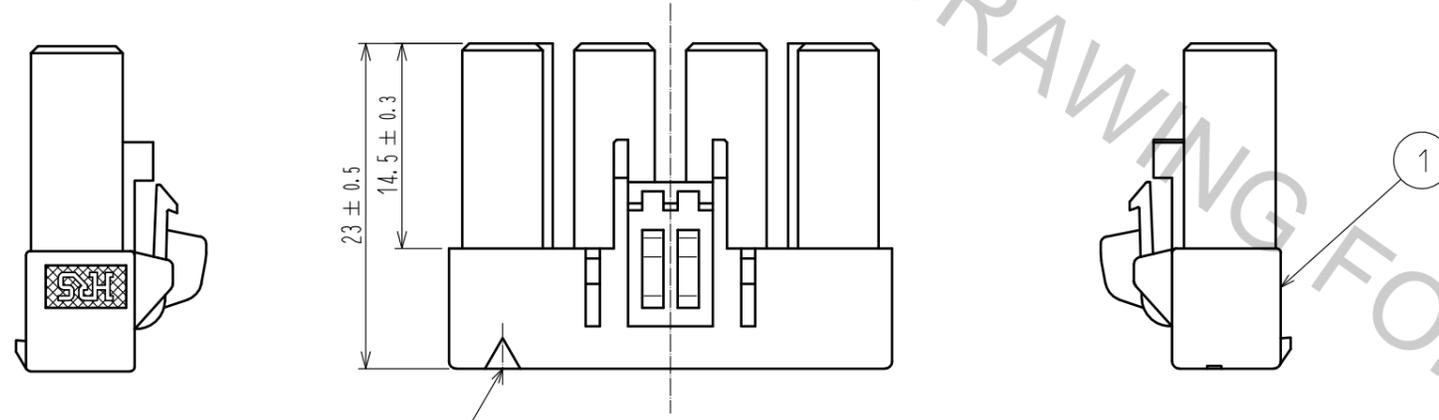
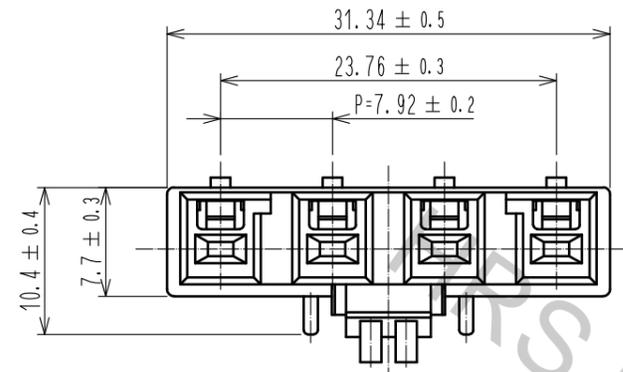
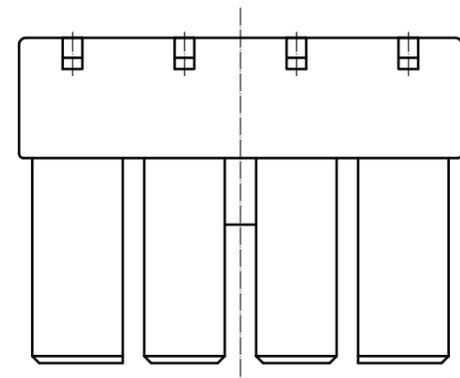


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

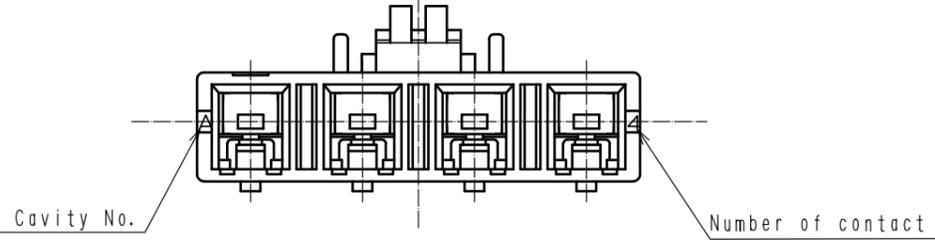

Polarization marking

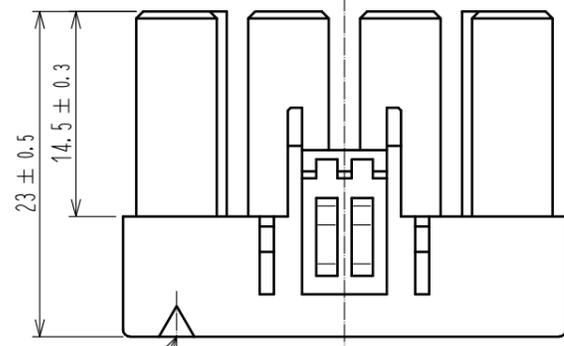

Note 1. Per pack : 100 pieces.
 2. UL(File No. E52653)
 C-UL(File No. E52653)
 TÜV(File No. R9950703) authorization article.



NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
			1	Polyamide	Natural(White). UL94V-0			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2 : 1	2	DIS-H-00003579		TS. KUMAZAWA	TS. FUKUSHIMA	18. 03. 24
HIROSE ELECTRIC CO., LTD.		APPROVED	HS. OKAWA	17. 08. 22	DRAWING NO.		EDC-163968-00-00	
		CHECKED	TS. FUKUSHIMA	17. 08. 22	PART NO.		DF22C-4S-7. 92C	
		DESIGNED	MI. SAKIMURA	17. 08. 22	CODE NO.		CL680-1104-9-00	
		DRAWN	MI. SAKIMURA	17. 08. 22			1/3	


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.




Precautions

Notification for harness assembly

- 1) When inserting the crimping terminal to the crimping socket, please do not tilt the crimping terminal or twist the cable.
Insertion at tilted angles or twisting the cable may cause deformation of the crimping terminal or crimping socket.
- 2) After inserting the crimping terminal to the crimping socket, please make sure that the lance has been hooked with pulling the cable lightly.
When checking the hook, please avoid bending the cable for preventing terminal drop-off.

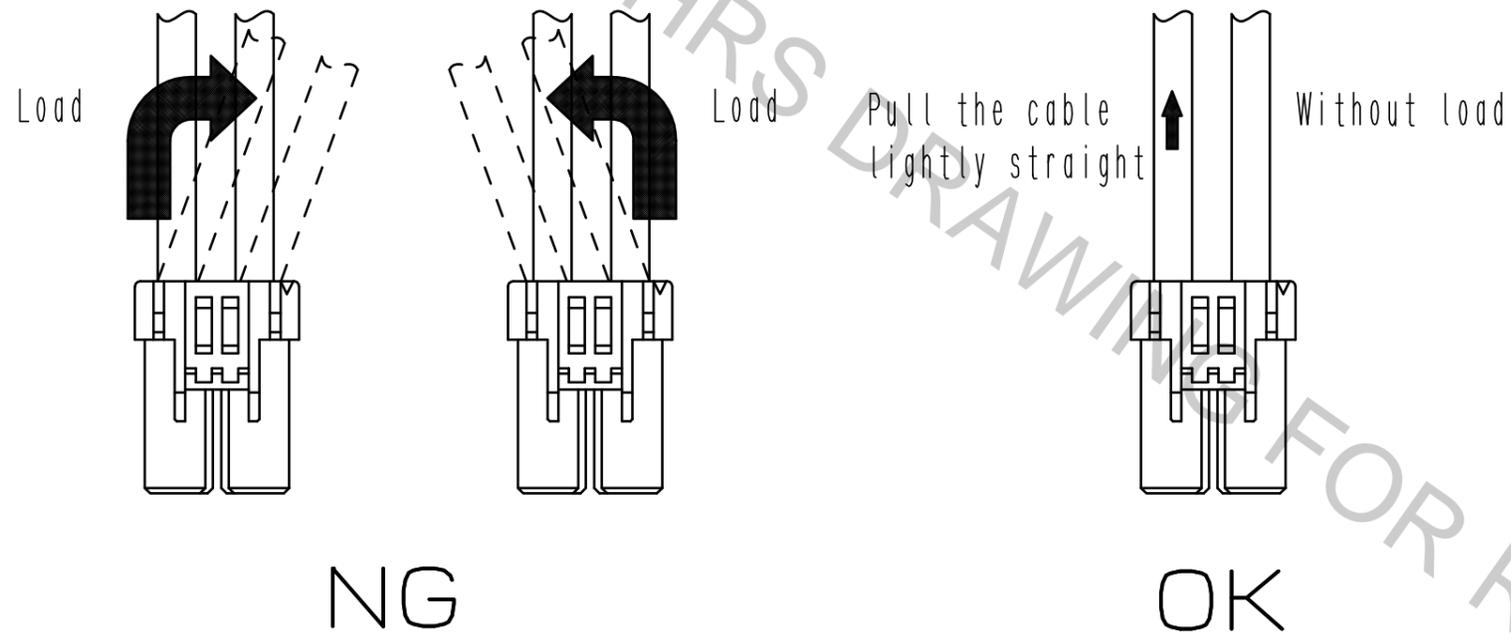

- 3) Bundle cables/Cable Cables
Recommend bundle and strip position of cables are 100 mm or more.
Bundling close to the connectors may cause terminal drop-off, breaking cables and unstable connection.

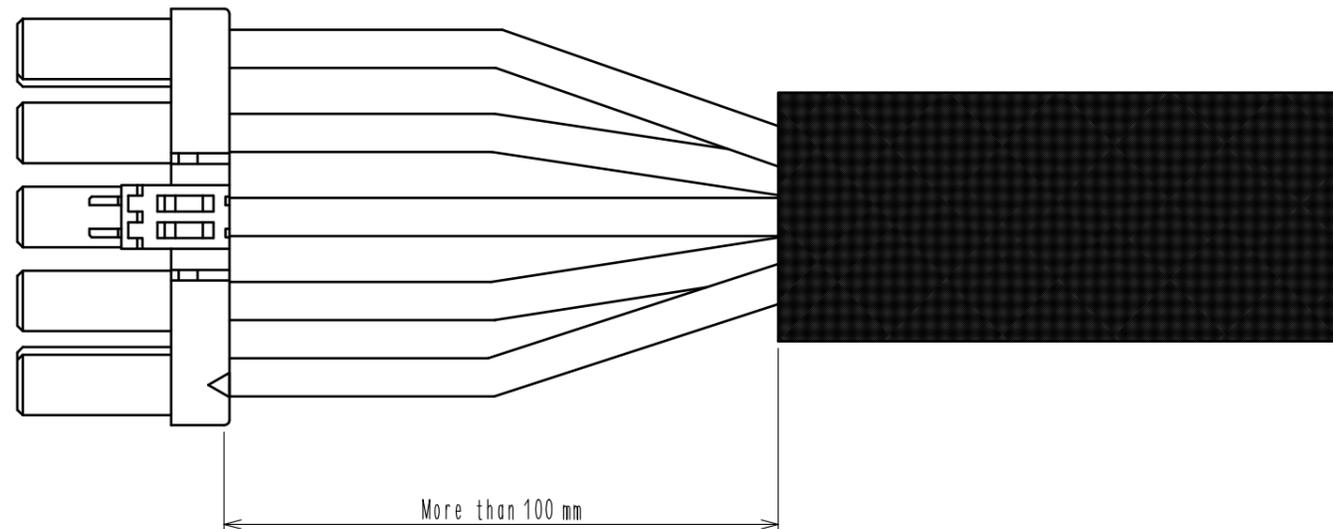

HRS

DRAWING NO.	EDC-163968-00-00
PART NO.	DF22C-4S-7.92C
CODE NO.	CL680-1104-9-00

2/3

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.






Precautions

Notification for Insertion/Extraction

- 1) Please insert/extract the crimping socket straight to the mating connector.
 Insertion/Extraction at tilted angles applies load concentration to the connector end and may cause deformation (at connection area, socket and header case, etc). There is a firing risk using this kind of deformed connector.



Insertion/Extraction

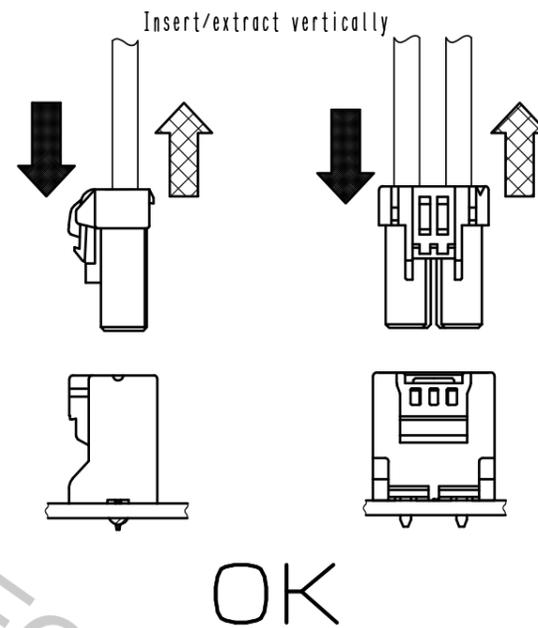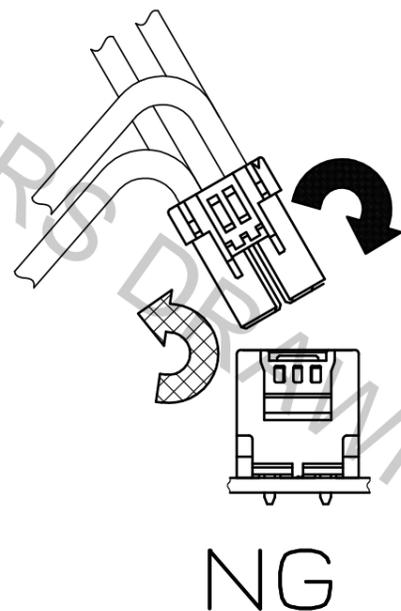
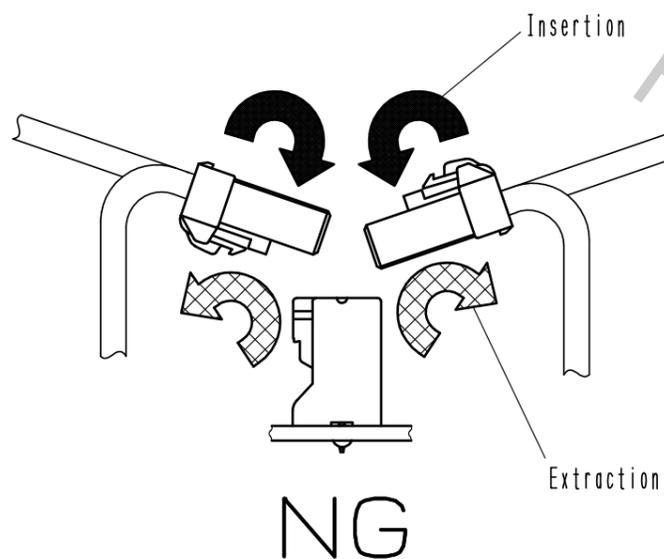


- 2) When it is hard to extract, please lightly insert the connector beforehand and then pull it with releasing the lock.
 Forced extraction has a risk of connector breakage.

Notification of wiring



- 1) When using a thick cable, short cable length and bending close to the connector end, these load concentrations may cause deformation.
 Please note that there is a firing risk using a deformed connector.
 When installing, please refrain from stress concentration such as cable bending close to the connector end or cable twisting.

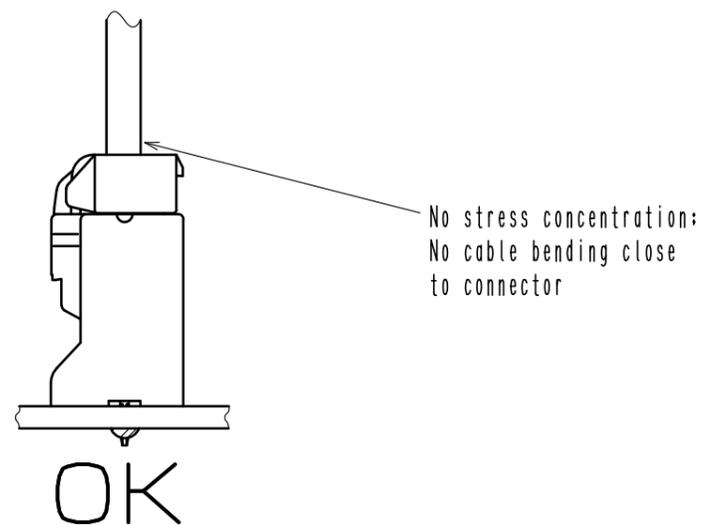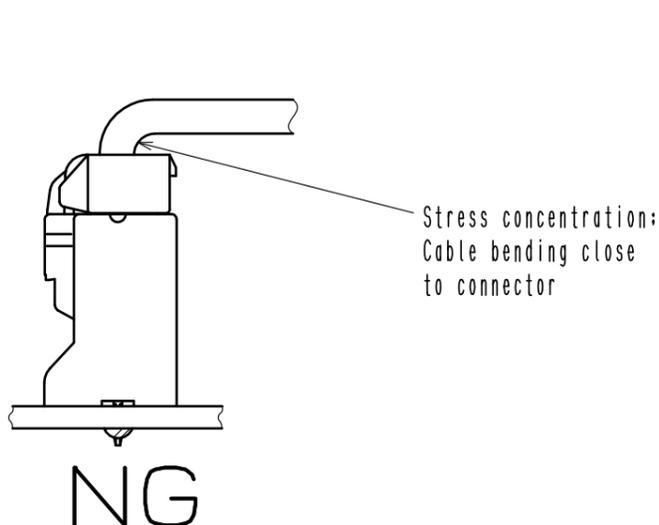

- 2) When applying load to the connector end, please use the retainer to reduce the stress on the connector.
 The retainer shall be installed after the crimping contact is completely inserted. It might be impossible to insert it when terminal installation is incomplete.

HRS	DRAWING NO.	EDC-163968-00-00	3/3
	PART NO.	DF22C-4S-7.92C	
	CODE NO.	CL680-1104-9-00	