


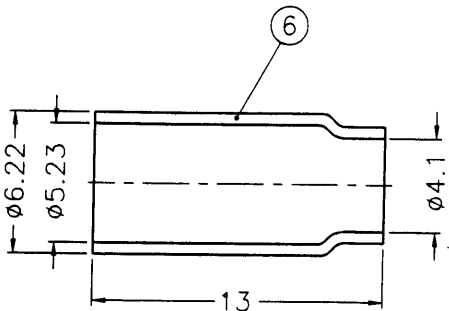


ISS		ZONE	REVISIONS	DESCRIPTION\PER REQUEST\DATE

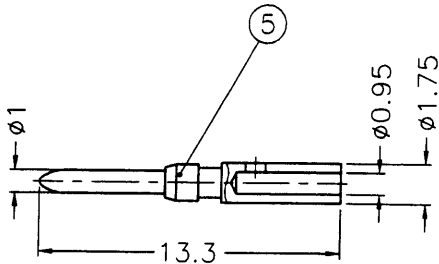

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

- CABLES: - NORTELL
RA 750-304541
- L910/39
- TR-SP.125
- L910/34
- BT 3002
- TR-SP.127
- PT-R 0229/70

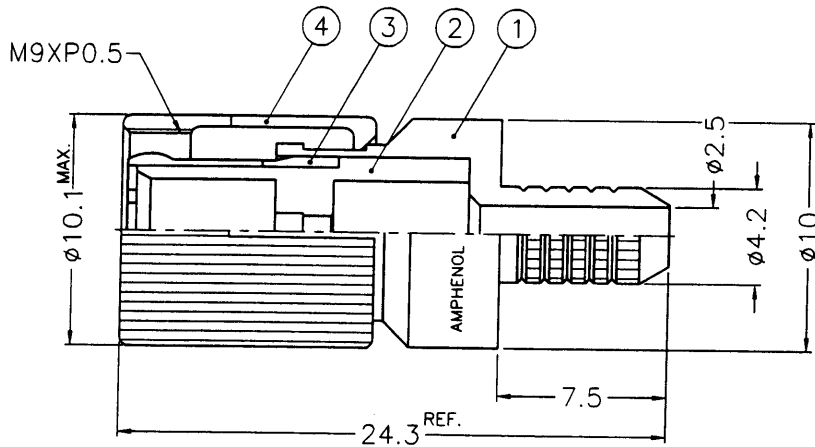

- FERRULE CRIMPING TOOLS P/N(套管壓著工具)
227-944 (M22520/5.01)
227-1221-19B (M22520/5.19) HEX: 5.41 L= 10.16
- INNER CONTACT CRIMPING TOOL P/N(內導體壓著工具)
413 SP 00 ADJUST TO 5 (CABLE BT 3002: ADJUST TO 3)
- STRIPPING TOOL FOR L910/34(剝線工具)
SP 456 00
- CONNECTOR ACCORDING TO NF C 93-570, DIN 47-295, CEI 169-13
(連接器依據 NF C 93-570, DIN 47-295, CEI 169-13)
- PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE
(使用商業產品編號和日期碼袋包裝)



Directive 2002/95/EC
RoHs Compliant
Amphenol RF

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BRASS	GOLD	1	
4	SHELL	BRASS	NICKEL	1	
3	OUTER CONTACT	BRONZE	GOLD	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	NICKEL	1	

DIMENSIONS ARE IN MILLIMETERS				

PART NO.	
156-929-34	
APPROVED	DATE
<i>Golden</i>	12-16-99'
CHECKED	DATE
<i>Golden</i>	12-16-99'
DRAWN	DATE
<i>Kelo</i>	12-16-99'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	1.6/5.6 75Ω STRAIGHT PLUG, CRIMP TYPE
DRAWING NO.	
FILE NO.	F:\DWG\ASF\156\929\34

156-R0/59