

CATALOG LISTING

BZV6-2RN2

PAGE 1 OF 1

REPLACES

SR-7227

ISSUE

11

CHECK

REVISIONS

A

CO-73736

SAV

7 OCT 92

B

CO-73655

TSM

22 OCT 93

C

CO-77179-C

JJO

12 MAR 94

D

CO81513B

JAK

11 MAR 97

CHECK


DDM/CAD

DRAWN

SAV

7 OCT 92

CHECK

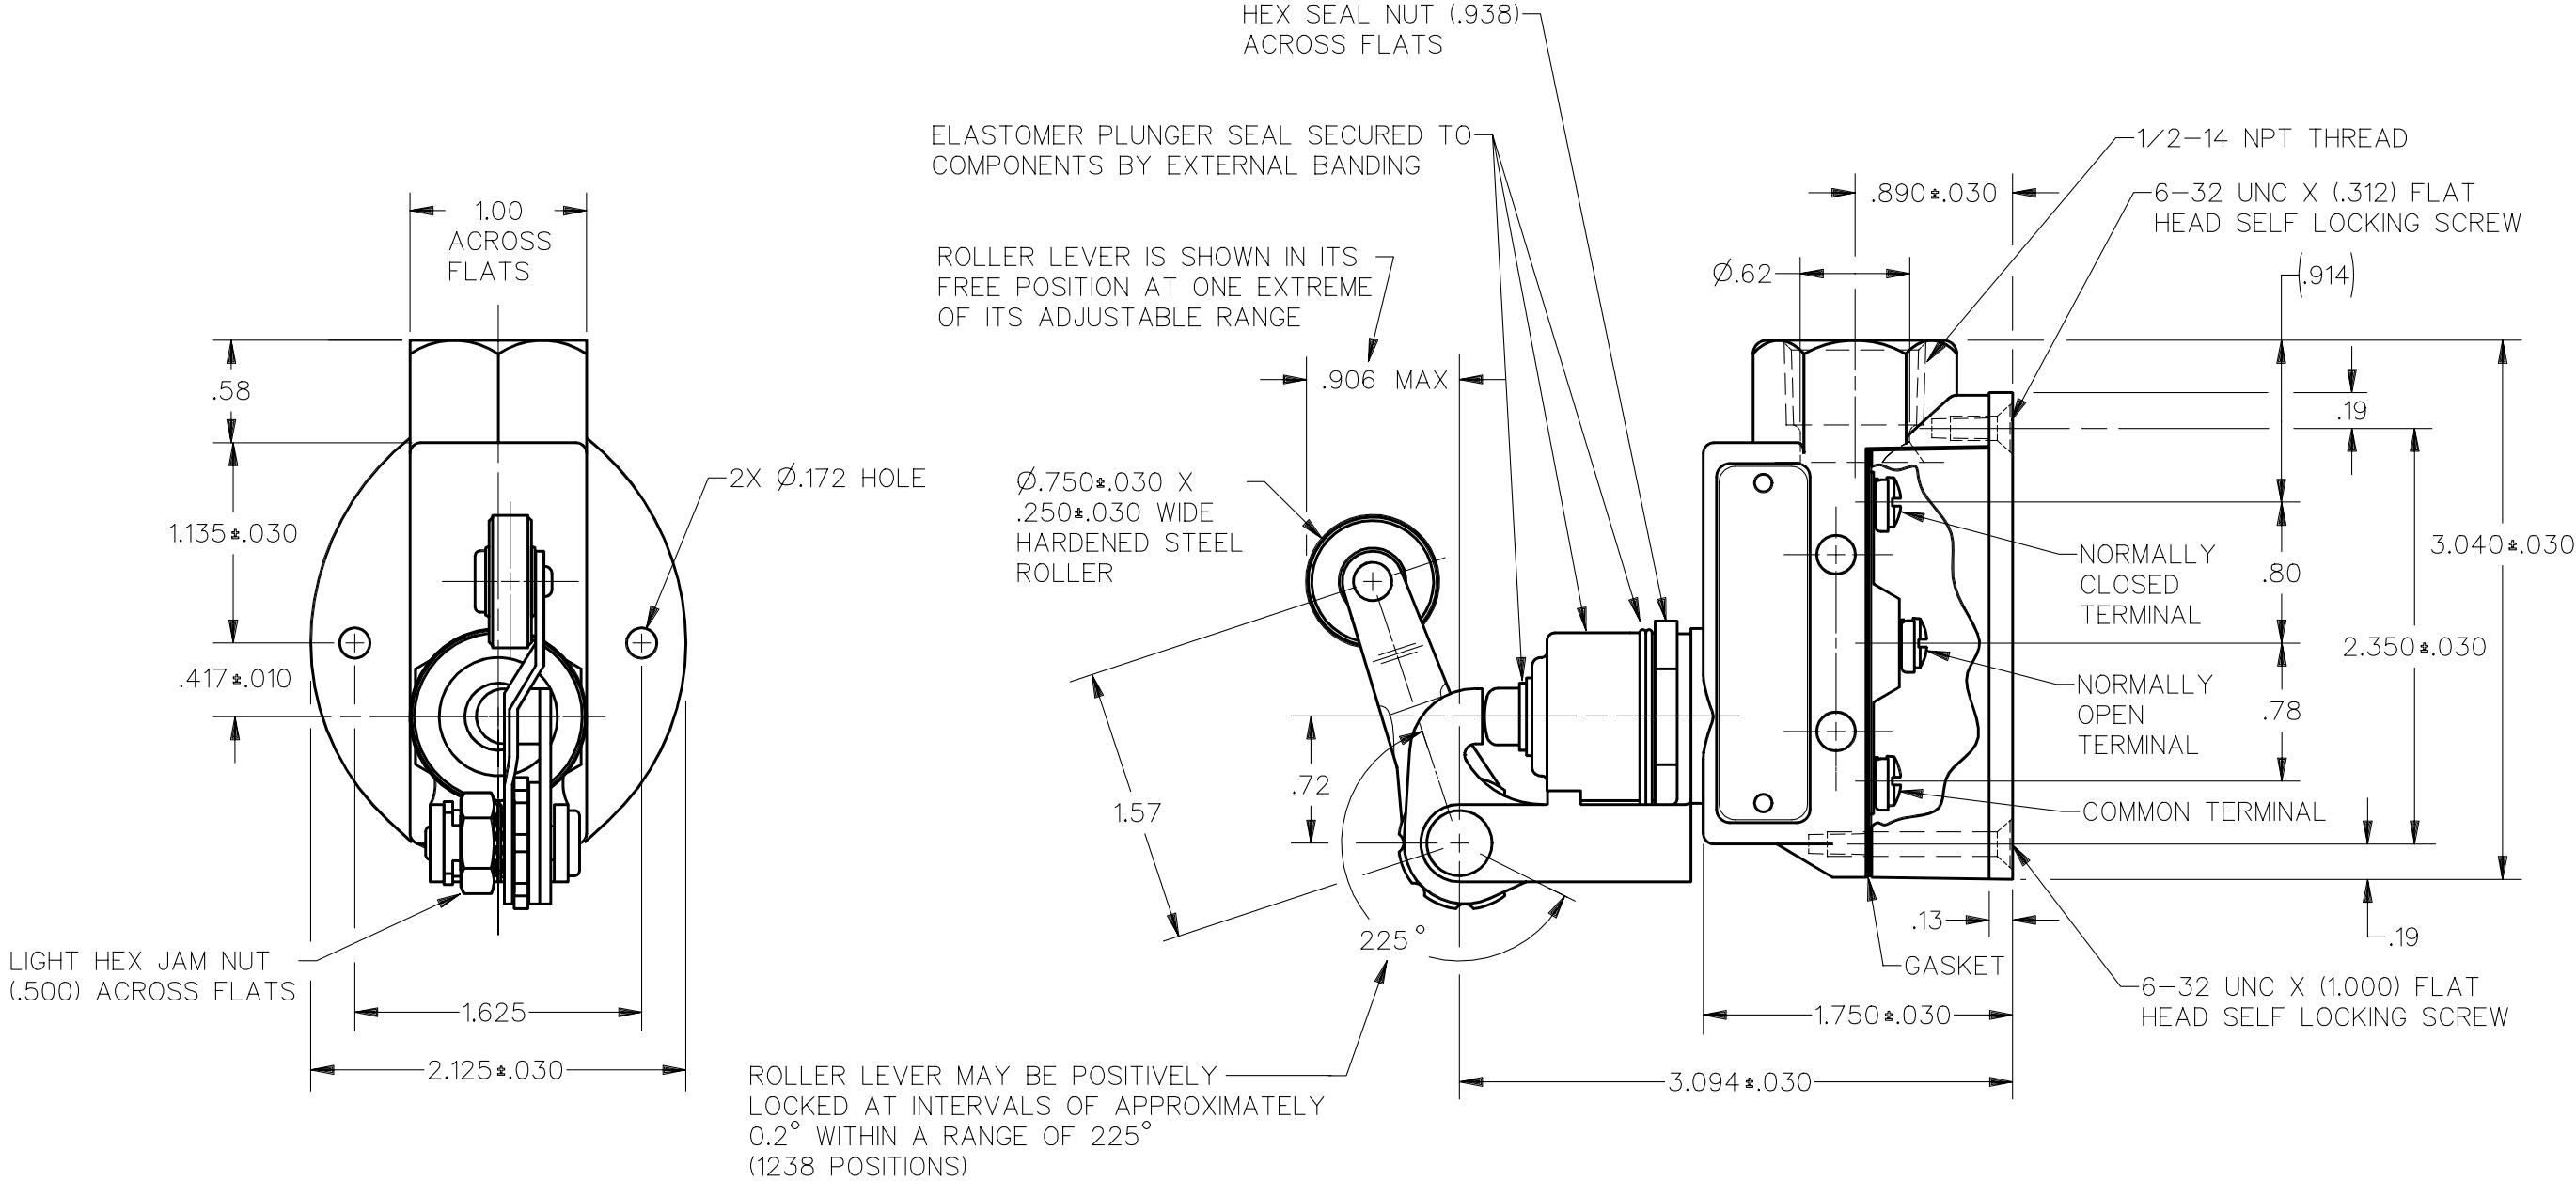

NOTE

1 — ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER

2 — 3X 6-32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — — 10-20 OZ	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
RELEASE FORCE — — — — — 6 OZ MIN	S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
PRETRAVEL — — — — — .188 MAX	L74 15A 125, <u>250</u> OR 480 VAC	ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — — .006 MAX	2A 600 VAC	TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — .219 MIN	1/8HP 125 VAC, 1/4HP <u>250</u> VAC	THREE PLACE (.000) ±.005
BASIC SWITCH REPLACEMENT — — — BZ-2RN702	1/2A 125 VDC, 1/4A 250 VDC	ANGLES ±
		WEIGHT .76 LB

ANSI Y14.5M-1982 APPLIES