


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△					△				

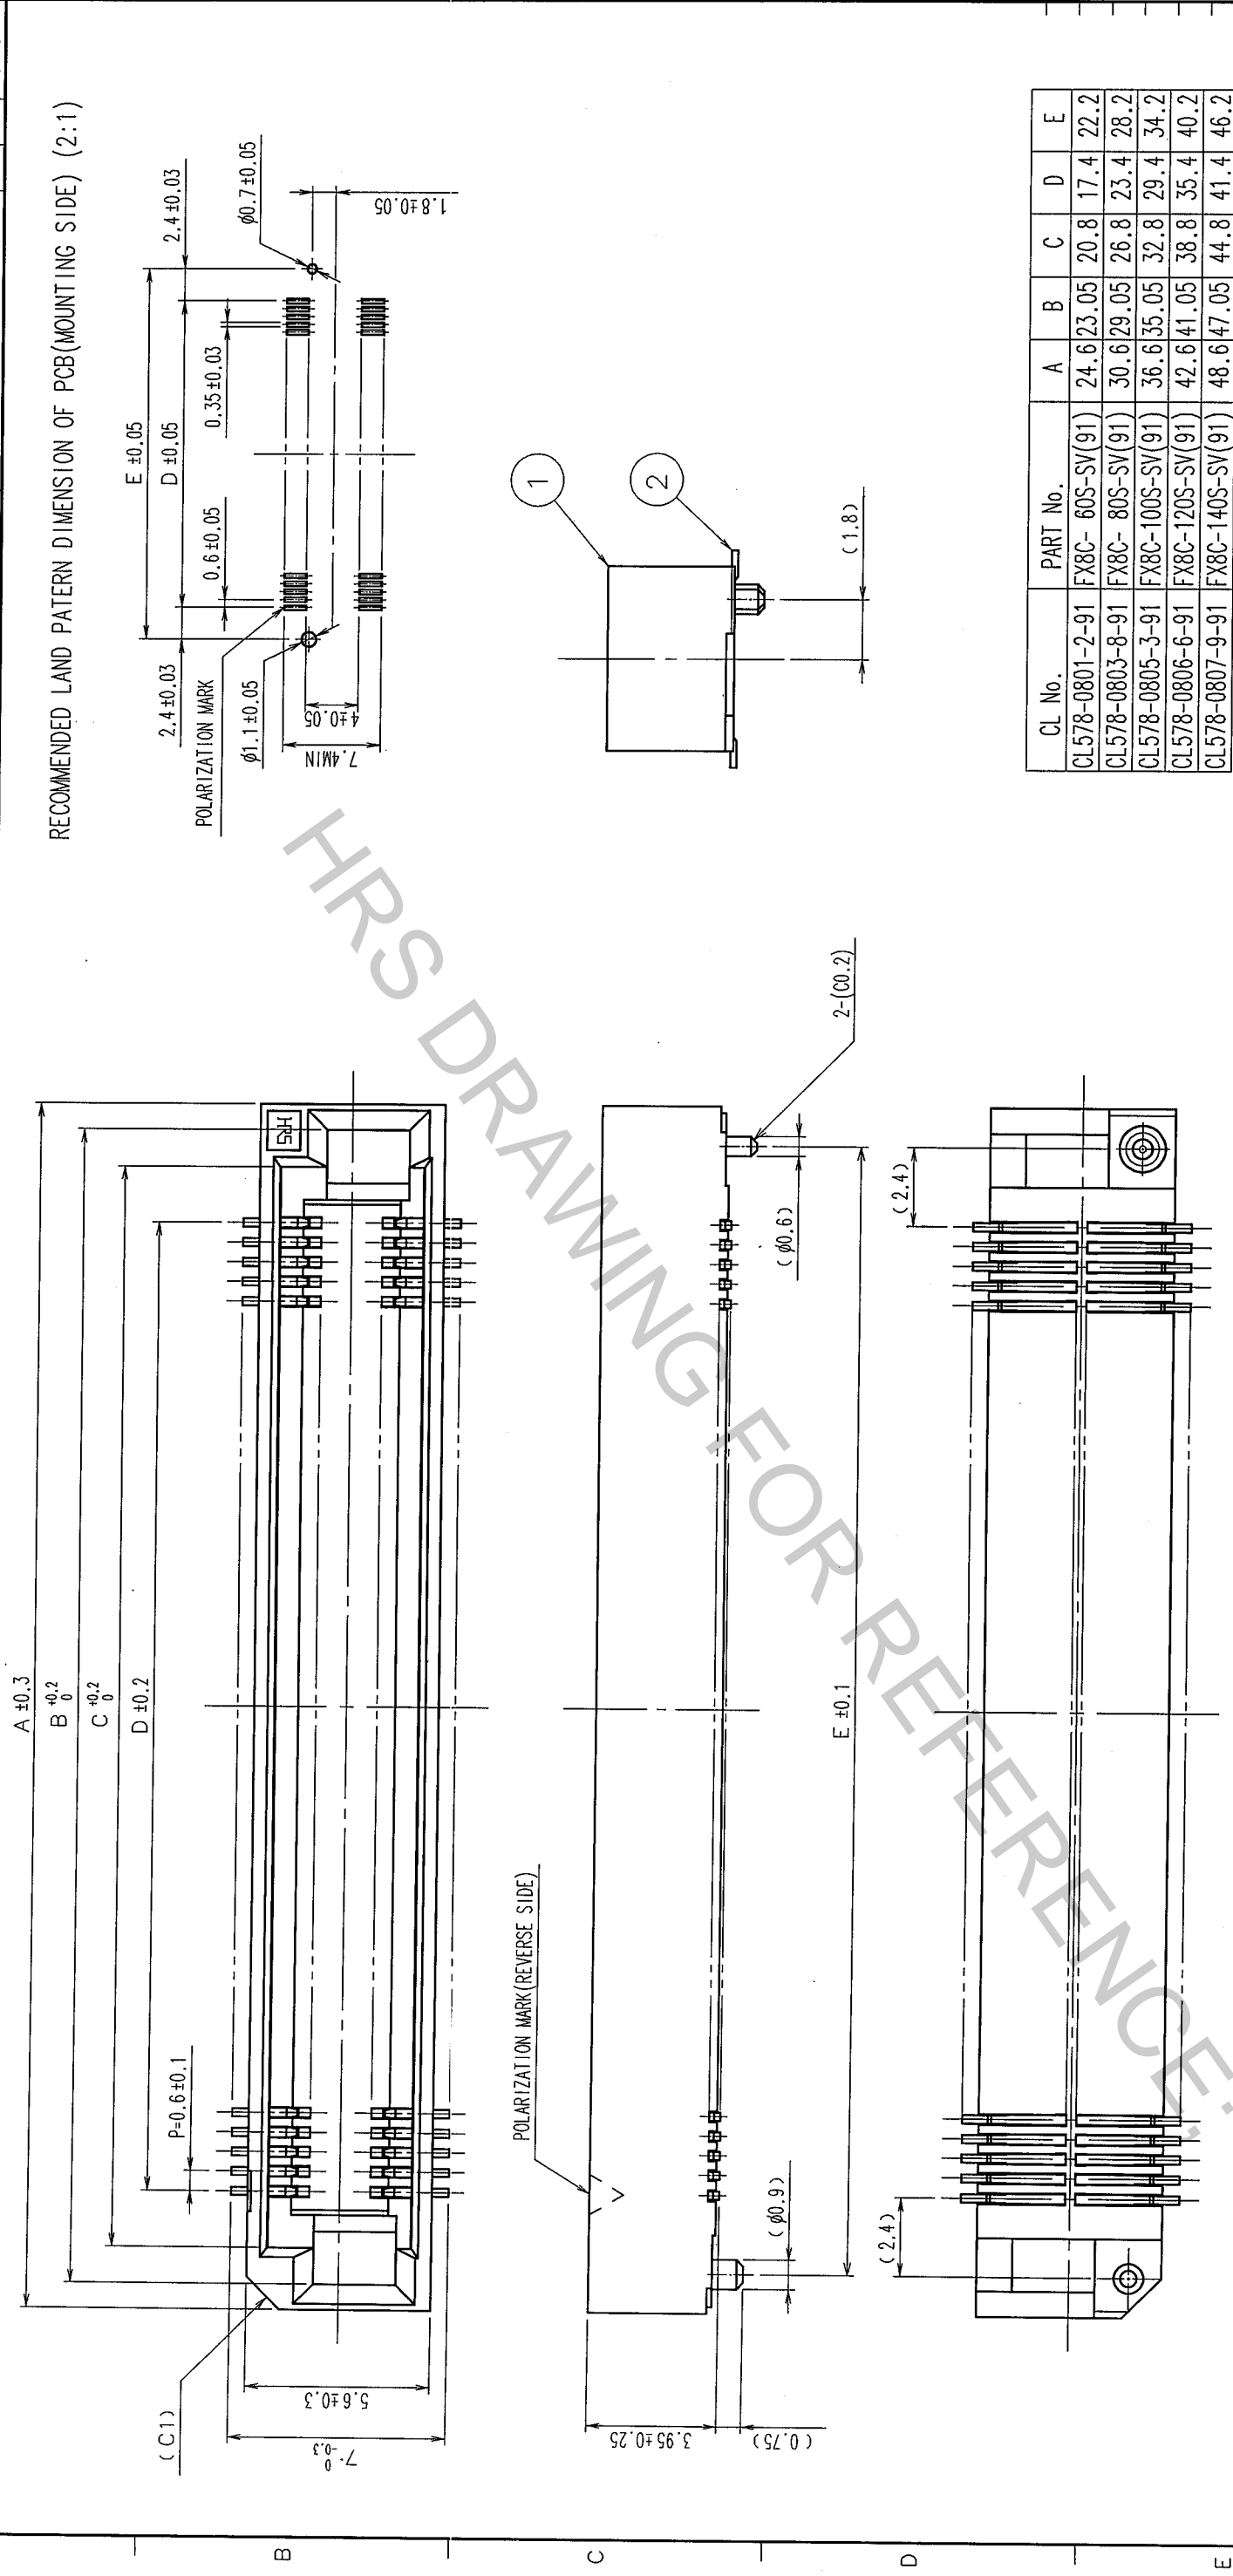

CL No.	PART No.	A	B	C	D	E
CL578-0801-2-91	FX8C- 60S-SV(91)	24.6	23.05	20.8	17.4	22.2
CL578-0803-8-91	FX8C- 80S-SV(91)	30.6	29.05	26.8	23.4	28.2
CL578-0805-3-91	FX8C-100S-SV(91)	36.6	35.05	32.8	29.4	34.2
CL578-0806-6-91	FX8C-120S-SV(91)	42.6	41.05	38.8	35.4	40.2
CL578-0807-9-91	FX8C-140S-SV(91)	48.6	47.05	44.8	41.4	46.2

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μ m min. MOUNTING AREA : GOLD FLASH UNDER PLATING : NICKEL 1.5μ m min.		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)			DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
			T. Noda		K. Doi	H. Okawa	H. Okawa	
			'05.03.16		'05.03.16	'05.03.16	'05.03.16	
DRAWING NO.		PART NO.		FX8C-※S-SV(91)				
EDC3-151022-21								
SCALE								
5 : 1								
UNITS								
mm								
HRS				HIROSE ELECTRIC CO., LTD		CL578		
				CODE NO.		1/2		

NOTE

- 1 LEAD CO-PLANARITY SHALL BE 0.1 mm MAX.
- 2 FOR DETAILS, SEE THE SECTION CONCERNING THE DELIVERY FORM ON NEXT PAGE.
- 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO	PCK			
----	-----	--	--	--

