

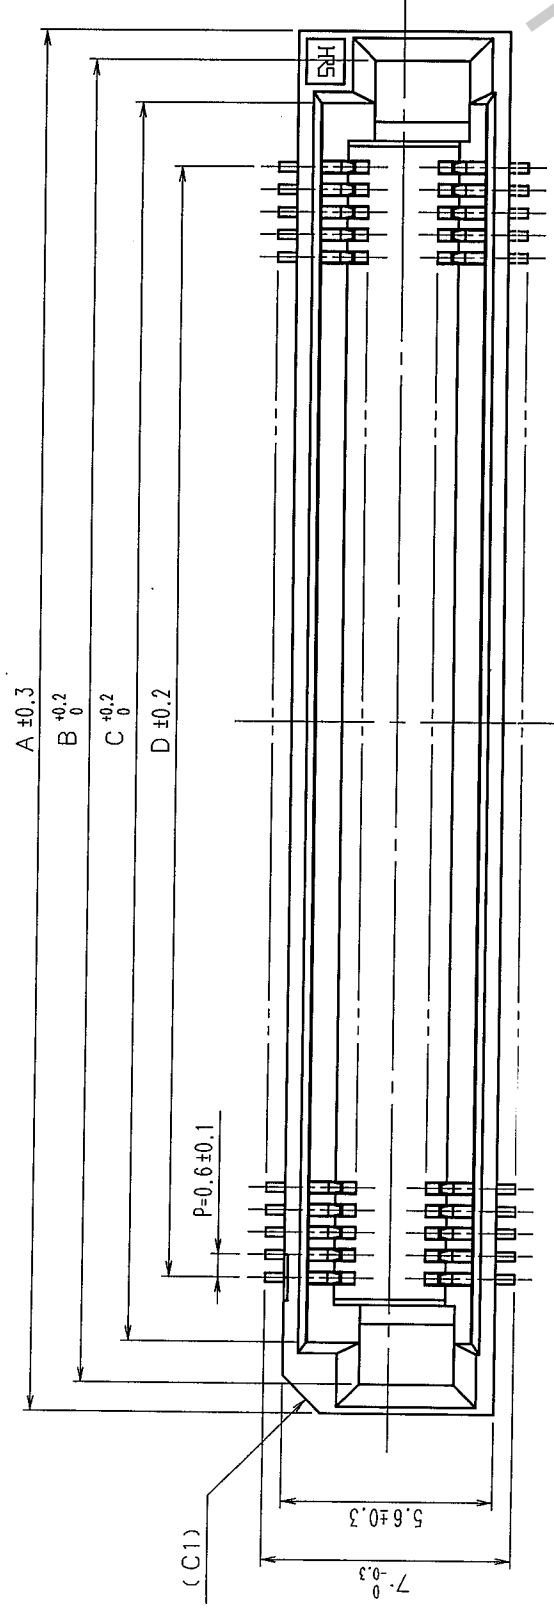
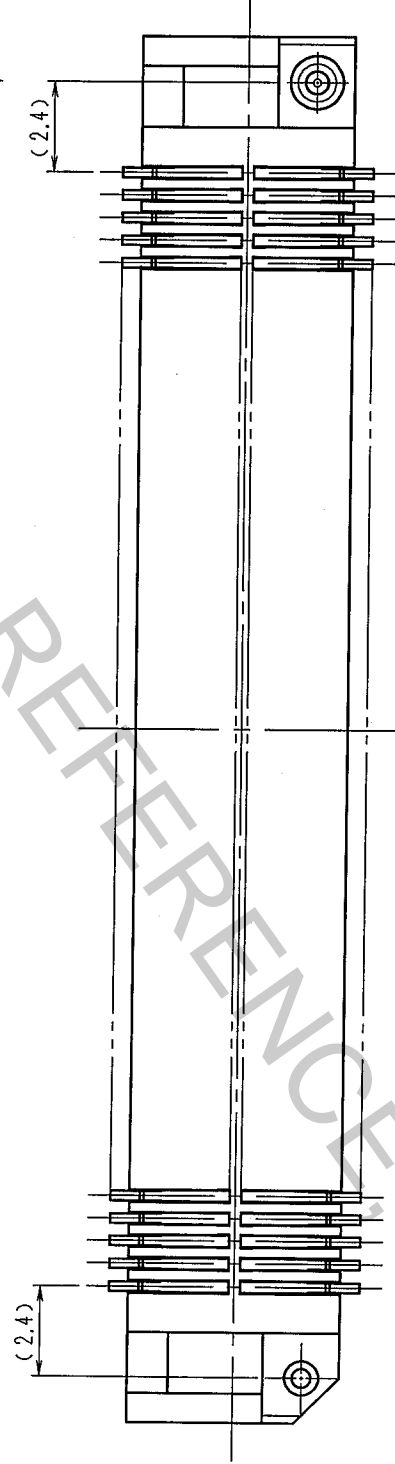
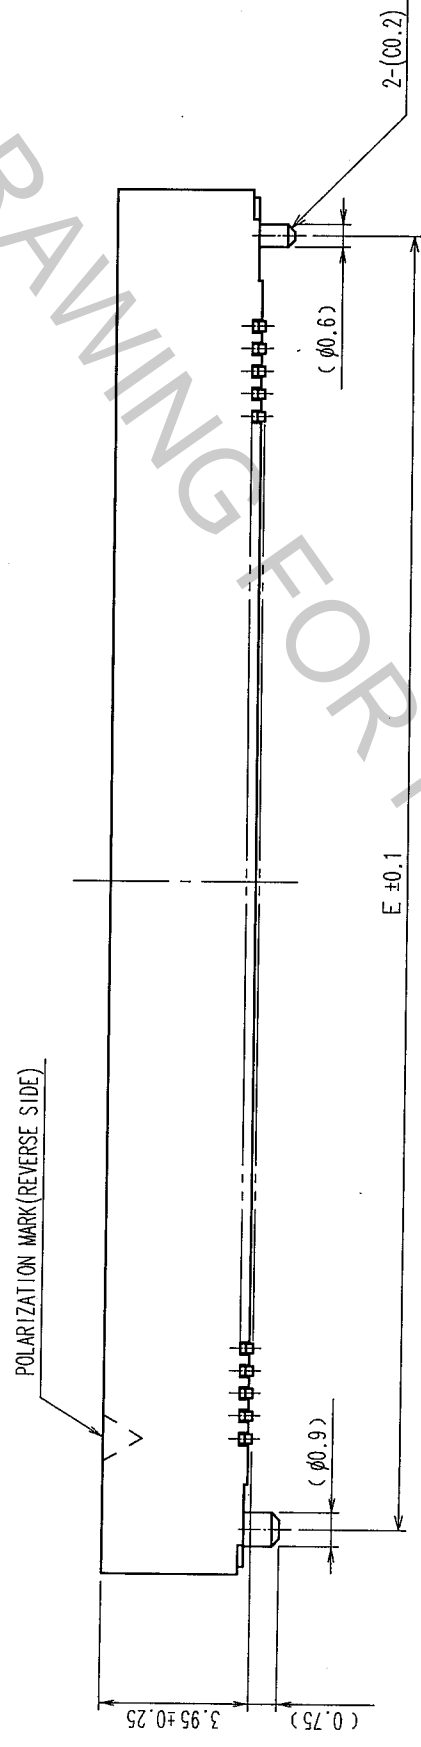


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓						✓				
✓						✓				
✓						✓				

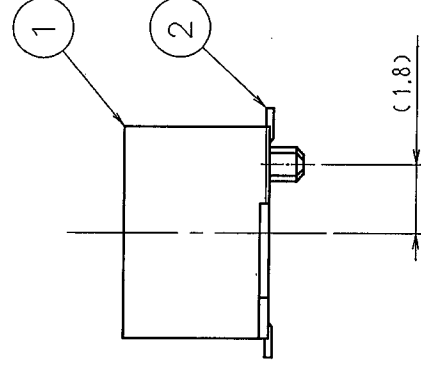

RECOMMENDED LAND PATTERN DIMENSION OF PCB(MOUNTING SIDE) (2:1)

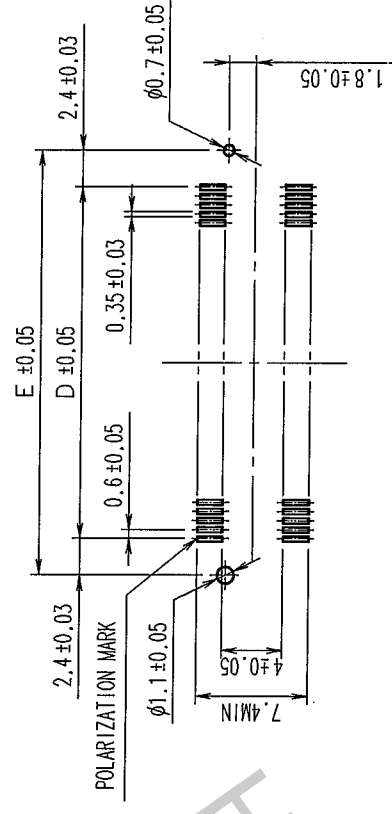

CL No.	PART No.	A	B	C	D	E
CL578-0801-2-91	FX8C- 60S-SV(91)	24.6	23.05	20.8	17.4	22.2
CL578-0803-8-91	FX8C- 80S-SV(91)	30.6	29.05	26.8	23.4	28.2
CL578-0805-3-91	FX8C-100S-SV(91)	36.6	35.05	32.8	29.4	34.2
CL578-0806-6-91	FX8C-120S-SV(91)	42.6	41.05	38.8	35.4	40.2
CL578-0807-9-91	FX8C-140S-SV(91)	48.6	47.05	44.8	41.4	46.2

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1 μ m min. MOUNTING AREA : GOLD FLASH UNDER PLATING : NICKEL 1.5 μ m min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN T. Noda '05.03.16	DESIGNED K. Saito '05.03.16	CHECKED H. Okawa '05.03.16	APPROVED H. Okawa '05.03.16	RELEASED
DRAWING NO.		PART NO.		F X 8 C - * * S - S V (9 1)			
SCALE 5 : 1		EDC3-151022-21		CODE NO.			
UNITS		HIROSE ELECTRIC CO., LTD		CL578			
mm		HRS		1/2			

NOTE

- 1 LEAD CO-PLANARITY SHALL BE 0.1 mm MAX.
- 2 FOR DETAILS, SEE THE SECTION CONCERNING THE DELIVERY FORM ON NEXT PAGE.
- 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO	PCK			
----	-----	--	--	--

