



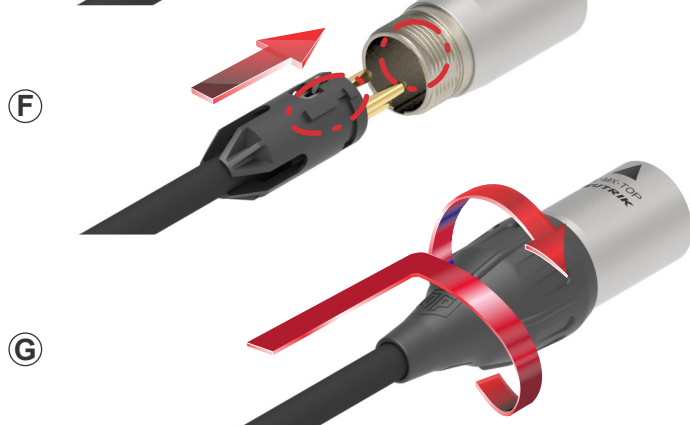

# ASSEMBLY INSTRUCTION

## NC3MX-TOP & NC5MX-TOP | XLR Cable Connector

IP65 RATED AND UL50E APPROVED.

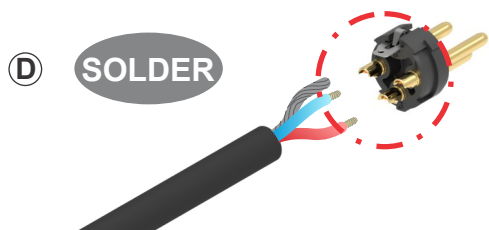


**A** Cut cable end approx. 45°.

**B** Slide the bushing over the cable.

To ease the boot assembly apply some cable pulling lubricant to the cable ends.

**C** Prepare cable as shown.

**D** Insert wires into the terminals and **SOLDER** them.

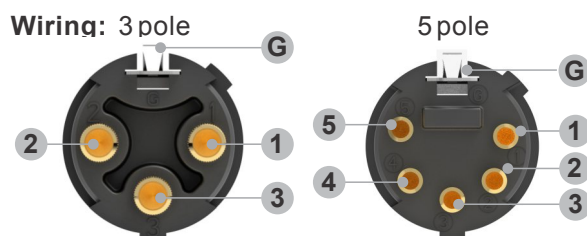

Put chuck onto the cable.


Attention: Pay attention to the guiding key.

**F** Slide insert and chuck together into the housing.

Important: Align the insert by positioning as shown.

**G** Finish the installation by turning the bushing onto the connector.

Attention: Screw the bushing to the end of the thread.

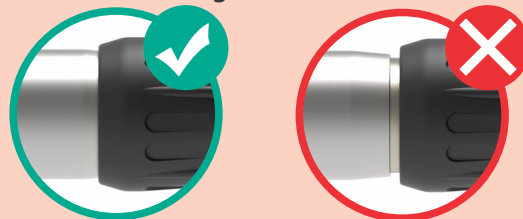

FINISHED



NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93  
NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704 / 438 9202  
NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439  
NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131 / 280 830

NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511  
NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796  
NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052  
NEUTRIK India Pvt. Ltd. IND T: +91 / 982 05 43 424 F: +91 / 22 26163 540

Draft. Nr.: BDA 550 | Update: 06.09.2018 | Data subject to change without prior notice. ©2018 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® is a registered trademark.

[www.neutrik.com](http://www.neutrik.com)

**NEUTRIK**