



ASSEMBLY INSTRUCTION


etherCON® TOP | NE8MX-TOP

Ruggedized RJ 45 Data Connector, IP65 and UL50E

IP65 RATED AND UL50E APPROVED.




Ⓐ Cut cable end approx. 45°.

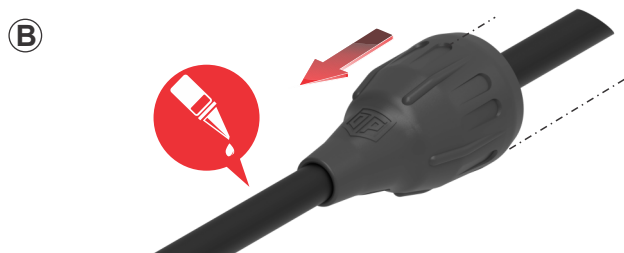


Ⓑ Slide the bushing over the cable.

To ease the boot assembly apply some cable pulling lubricant to the cable ends.

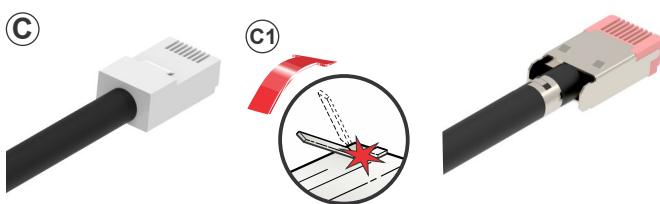


Ⓒ Assemble the RJ45 plug on the cable.

Ⓒ1 Cut off the release tab of RJ45 plug.

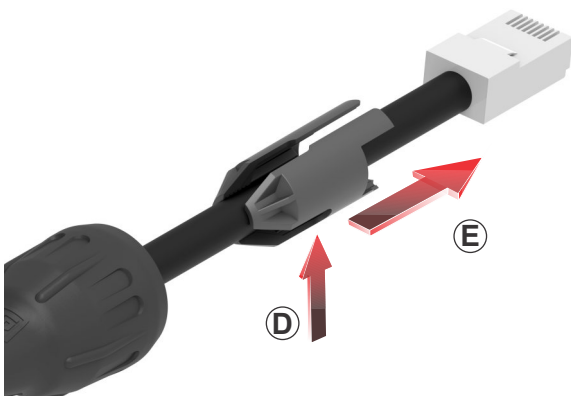

Ⓓ Put the chuck onto the cable.
Align the opening with the contact side.

STANDARD
VERSION

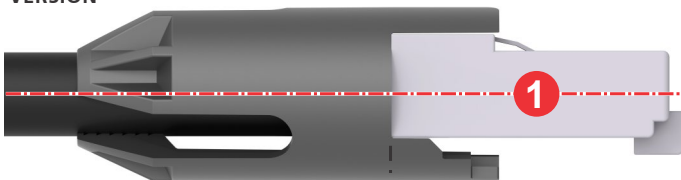


Ⓔ Position the RJ45 in the chuck.


Attention:

① RJ45 must be straight.


② Special versions must engage in the inner recess of the chuck.

SPECIAL
VERSION

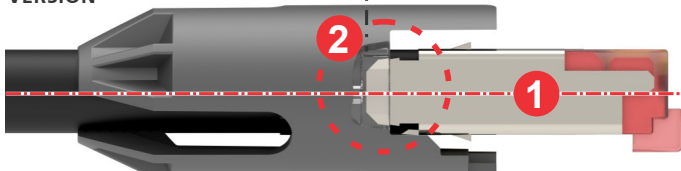

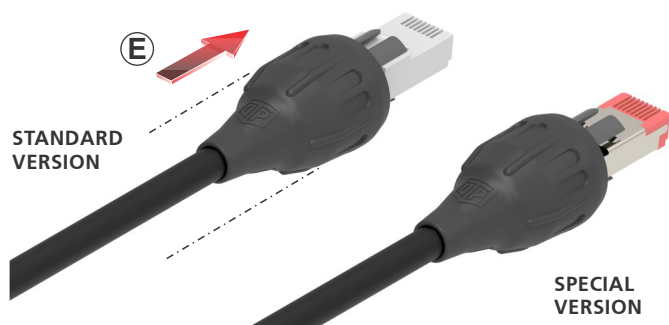


E Position the bushing onto the chuck.

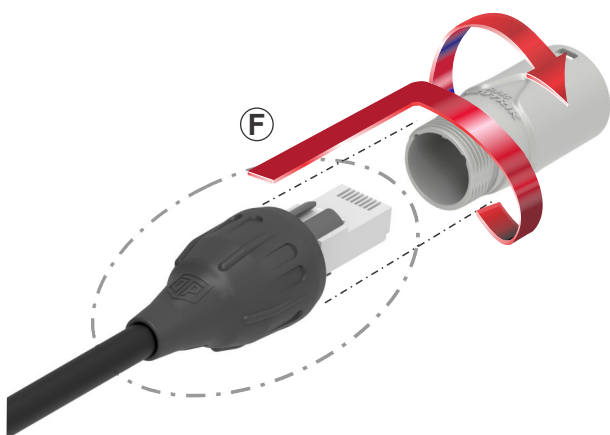

F Slide the unit (insert and boot) into the housing and tighten the bushing.

Attention:
Screw the bushing to the end of the thread.

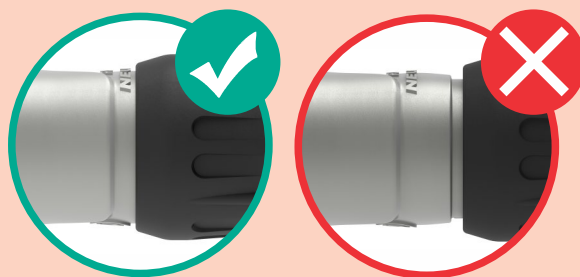

G CAUTION:

There is no overlap allowed.

FINISHED etherCON®



Find more etherCON®
details on
www.neutrik.com.



NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93
NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704 / 438 9202
NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439
NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131 / 280 830

NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511
NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796
NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052
NEUTRIK India Pvt. Ltd. IND T: +91 / 982 05 43 424 F: +91 / 22 26163 540

Draft. Nr.: BDA 547 | Update: 06.09.2018 | Data subject to change without prior notice. ©2018 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.