
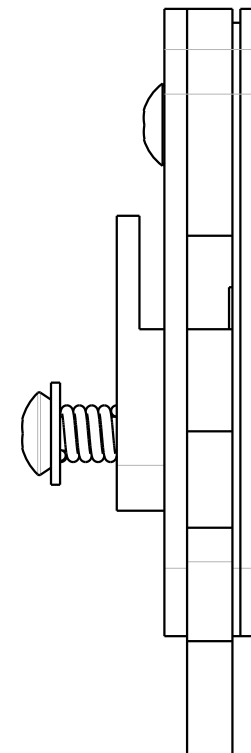


c ; 0 ; RL

WIRE SECTION RANGE



HEAD'S P/N

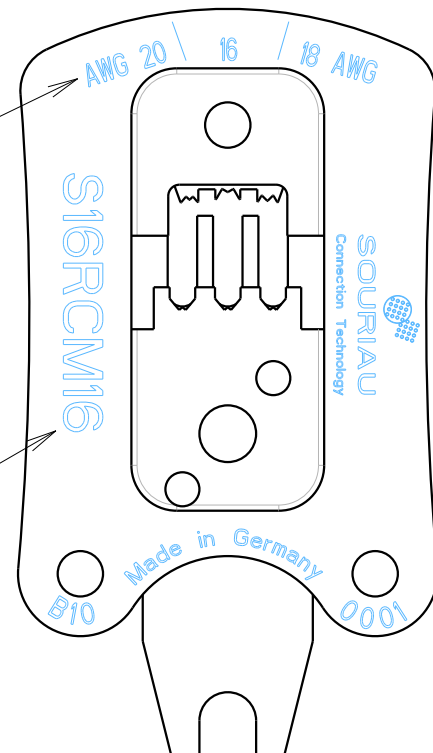

TECHNICAL CHARACTERISTICS :
Contact positioning with locator
Burnished surface
Fully recyclable
RoHS (Directive 2002/95/EG) compliant

Weight : approx. 115 g
Height : approx. 65mm
Width : approx. 37mm



(1) Nota : issued from IEC60352-2
Individual packaging

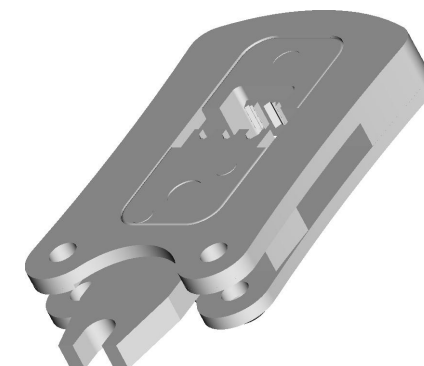

For other details please refer to technical notice N° BT254

P/N : SXXRCMXXXX

ACTIVE CONTACT PART	CONTACT TYPE	DIE LOCATION ON HEADS	WIRE SECTION RANGE (1)	SECTION (mm²) (1)	TENSILE STRAIGHT TEST (mini) (1)	HEIGHT (mm) H (±0.075)	WIDTH (mm) W (±0.075)	HEAD'S P/N		
SIZE 20	RM / RC 24W3*	26/24	AWG 26	0,12 min	15 N	0.95	1.25	S20RCM		
			AWG 24	0,25 max	32 N					
	RM / RC 20W3*	22/20	AWG 22	0,32 min	40 N	1.20	1.70			
			AWG 20	0,50 max	60 N					
	RM / RC 18W3*	20/18	AWG 20	0,50 min	60 N	1.30	1.80			
			AWG 18	0.82 max	90 N					
SIZE 16	RM / RC 28M1*	30/28	AWG 30	0,05 min	6 N	1.10	1.45	S16RCM20		
			AWG 28	0.08 max	11 N					
	RM / RC 24M9*	26/24	AWG 26	0,12 min	15 N	1.15	1.45			
			AWG 24	0,25 max	32 N					
	RM / RC 20M13*	22/20	AWG 22	0,32 min	40 N	1.25	1.80			
			AWG 20	0,50 max	60 N					
			RM / RC 20M12*	AWG 22	0,32 min				40 N	
	AWG 20			0,50 max	60 N					
	RM / RC 16M23*			20	AWG 20			0,50 min	60 N	1.65
			18	AWG 18	0.82			90 N	1.80	2.30
		16	AWG 16	1.5 max	150 N	1.95	2.55			
	RM / RC 14M30*	16	AWG 16	1,5 min	150 N	2.10	2.80	S16RCM14		
		14	AWG 14	2.5 max	230 N	2.30	2.80			
	RM / RC 14M50*	16	AWG 16	1,5 min	150 N	2.05	2.80	S16RCM1450		
		14	AWG 14	2.5 max	230 N	2.25	2.80			

C	30/05/11	Modification of the dim. H and W		N° 21805
		—		
ISS	DATE	Latest modification - by: ROUILLARD		MOD N°
Designed by:		RAGINE M.	Date: 03/08/10	CUSTOMER DRAWING
TITLE		TRIM TRIO TOOLING		
		CRIMPING TOOL'S HEAD FOR MACHINED CONTACTS		
Scale			General linear Tolerances: ± 0.2	NPRDS / PROJECT TOOLING
1/1				
		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	SOURIAU DRG N° SXXRCMXXXX-C			SHEET
A3				1 / 1