



## 3000 SERIES Illuminated Keypads

Responsive,  
illuminated  
keypads for  
low-light  
applications



- *Reliable data entry in outdoor or indoor locations*
- *High contrast keytops with integral white light LED illumination*
- *Robust construction for use in extreme, wet or dirty environments*
- *Responsive tactile keys*
- *4, 12 and 16 key formats*


Storm Interface products include technology protected by international patents and design registration. All rights reserved.




Storm 3000 Series Illuminated Keypads are ideal for use in dark or dimly lit applications. They are constructed to survive in exposed, wet or dirty environments. Available in 4, 12 and 16 key configurations, these robust keypads can be fixed to the surface of a host enclosure or located beneath an aperture in a panel. Keys move with a positive "over-centre" action to provide a responsive tactile dynamic and reliable data entry. This excellent tactile response combined with a home pip and high contrast keytop characters make these illuminated keypads accessible for those with visual impairment.

## Mounting & Connection Details

All dimensions are in mm

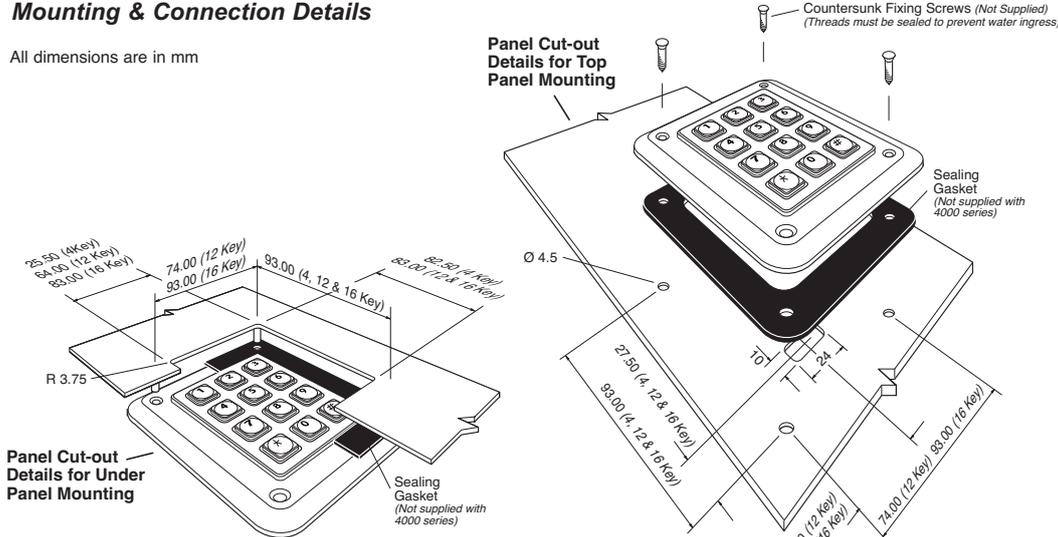


### Connection Details for 4 Key Keypad




CONTACT MATRIX	
CONNEX. PIN	ROW/ COLUMN
1	Cathode
2	Common
3	D
4	C
5	B
6	A
7	Anode

### Connection Details for 12 Key Keypad




CONTACT MATRIX	
CONNEX. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	-
8	D
9	C
10	Anode

### Connection Details for 16 Key Keypad



CONTACT MATRIX	
CONNEX. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	4
8	D
9	C
10	Anode

## Overall Dimensions

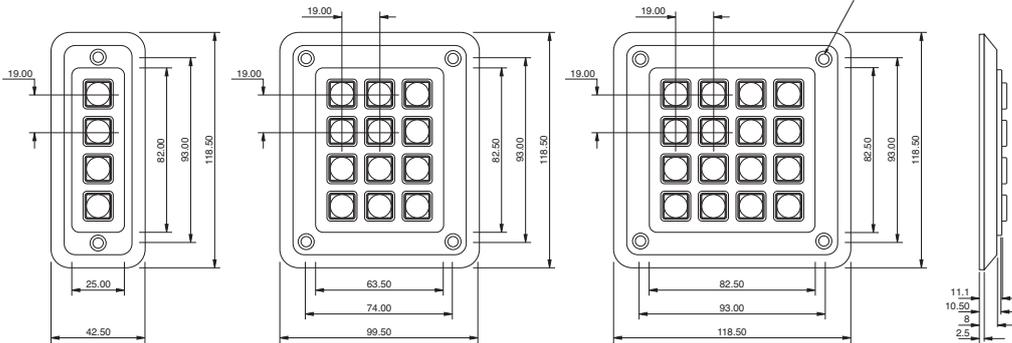

Part No.s  
3K0421 (F1-F4)  
3K0411 (← ↑ →)

3K12T1 (Tel. Format)  
3K1201 (Calc. Format)

3K16T1 (Tel. Format)  
3K1601 (Calc. Format)

## Electrical

Contact Bounce 5ms (max)  
Contact Resistance 100 ohms (max)  
Insulation Resistance 50 Mohms (min)  
Breakdown Voltage 500V AC (max 60 secs.)  
Operating Voltage 24V DC (max)  
Operating Current 50mA (max)

## Mechanical

Operational Life 2 million cycles (min) per key  
Keytop Travel 1.4mm nominal  
Actuation Force 180gms nominal  
Connector 0.1" pitch, gold plated square pin, male connector

## LED Specification

White Backlight current limited to n x 20mA @Vf  
Vf = 3.5V (typical), 4.2V (max)  
Reverse voltage, Vr = 5V (max)

## Environmental

Water / Dust Sealed IP54 (when mounted to suitable enclosure)  
Operational Temperature -10°C to +85°C (Dry)

## Material

Casing General Service Polymer (black)  
Keytops General Service Polymer (translucent)  
Contact Circuit Gold on Nickel Plated FR4

## Part Numbers

3K1W04110[x]  
4 Key Pad – Cursor  
3K1W04210[x]  
4 Key Pad – Function  
3K1W12010[x]  
12 Key Pad – Calculator  
3K1W12T10[x]  
12 Key Pad – Telephone  
3K1W16010[x]  
16 Key Pad – Calculator  
3K1W16T10[x]  
16 Key Pad – Telephone

## Accessories

4200-00[x]  
RS232 Encoder Interface

## Series Resistor Values

Use correct resistor to prevent damage to LEDs

4 way Connect +V via Series Resistor to Pin 7				12 way Connect +V via Series Resistor to Pin 10				16 way Connect +V via Series Resistor to Pin 10			
applied voltage	series resistor (ohms)	min resistor wattage	nominal current, per led (mA)	applied voltage	series resistor (ohms)	min resistor wattage	nominal current, per led (mA)	applied voltage	series resistor (ohms)	min resistor wattage	nominal current, per led (mA)
12	110	0.75	19	12	36	2.20	20	12	27	3.00	20
10	82	0.75	20	10	27	2.00	20	10	20	2.50	20
9	68	0.50	20	9	24	1.50	19	9	18	2.00	19
7.5	51	0.50	20	7.5	18	1.00	19	7.5	13	1.50	19

[www.storm-interface.com](http://www.storm-interface.com)

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.

Designed & produced by NIK Design nik@nikdesign.co.uk

Storm Interface products include technology protected by international patents and design registration. All rights reserved.

Storm is a trademark of Keymat Technology Ltd  
Storm Interface is a trading name of Keymat Technology Ltd



3K1W-LIT-01 Rev 2 Feb 2013



FM 39602