

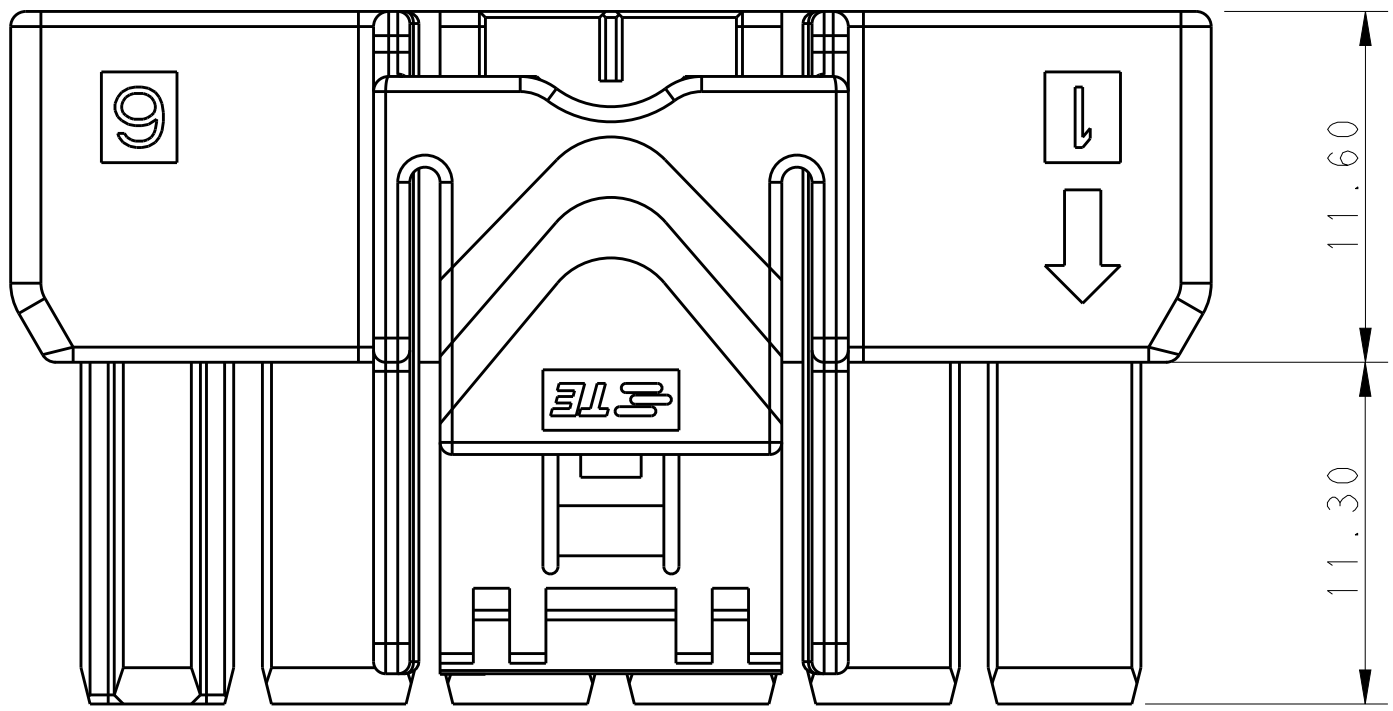
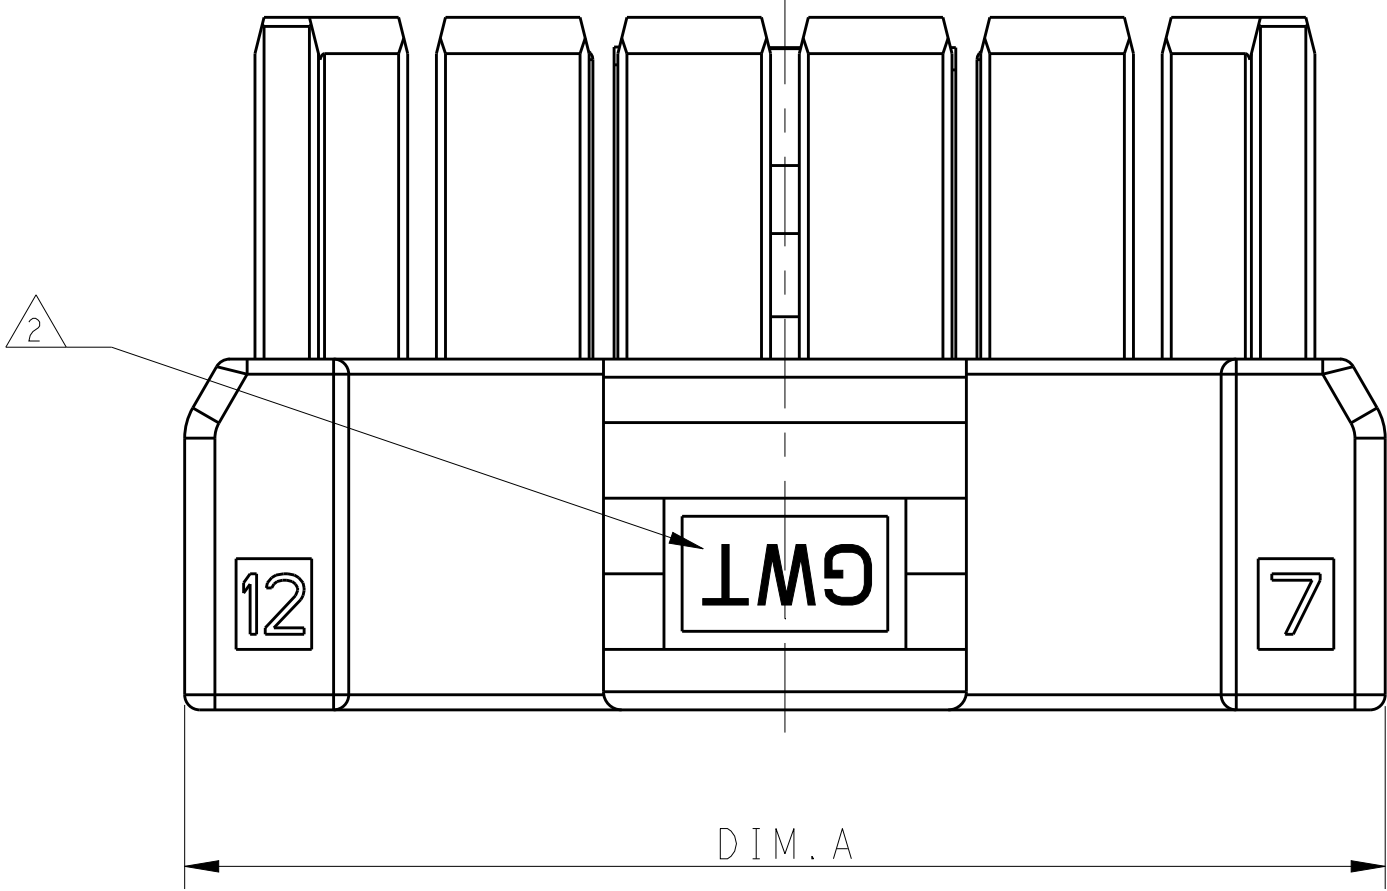
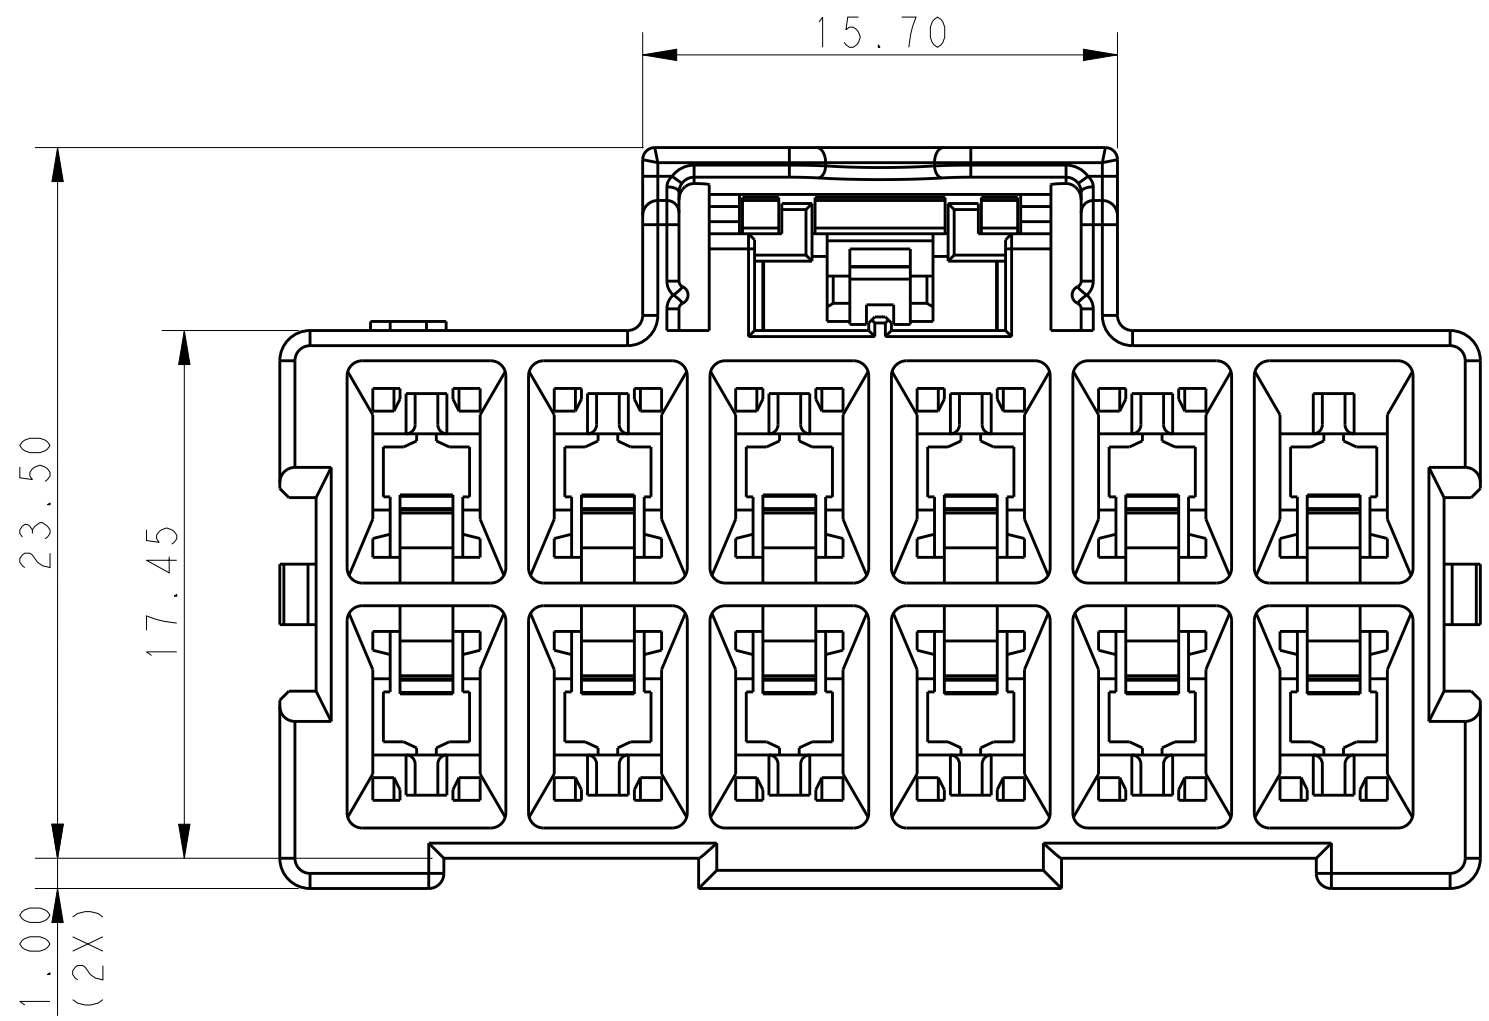


LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		A2		REVISED PER ECR-14-003492	15MAR2014	NK	GJ

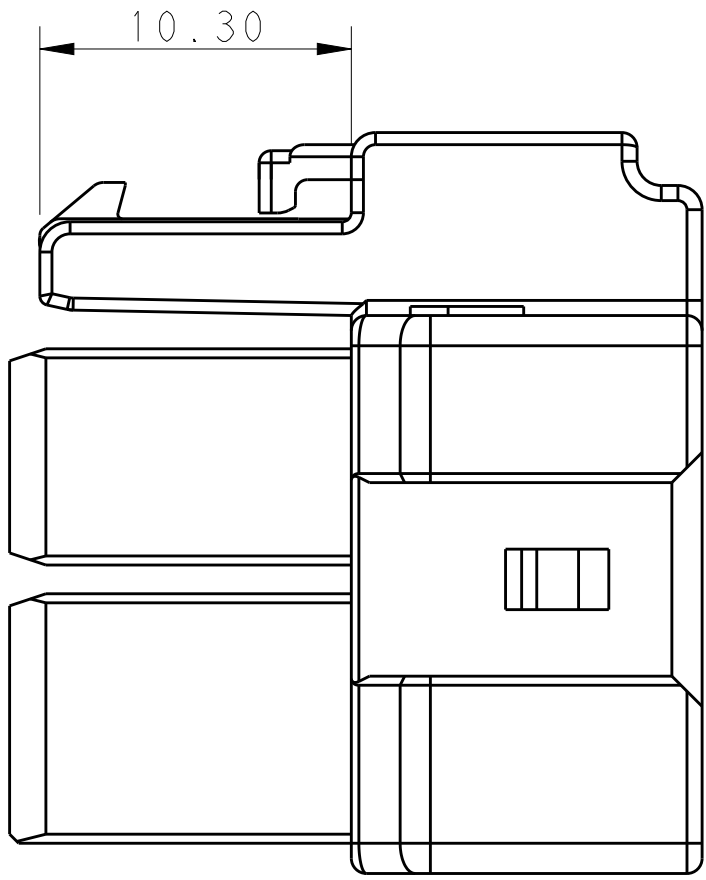

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

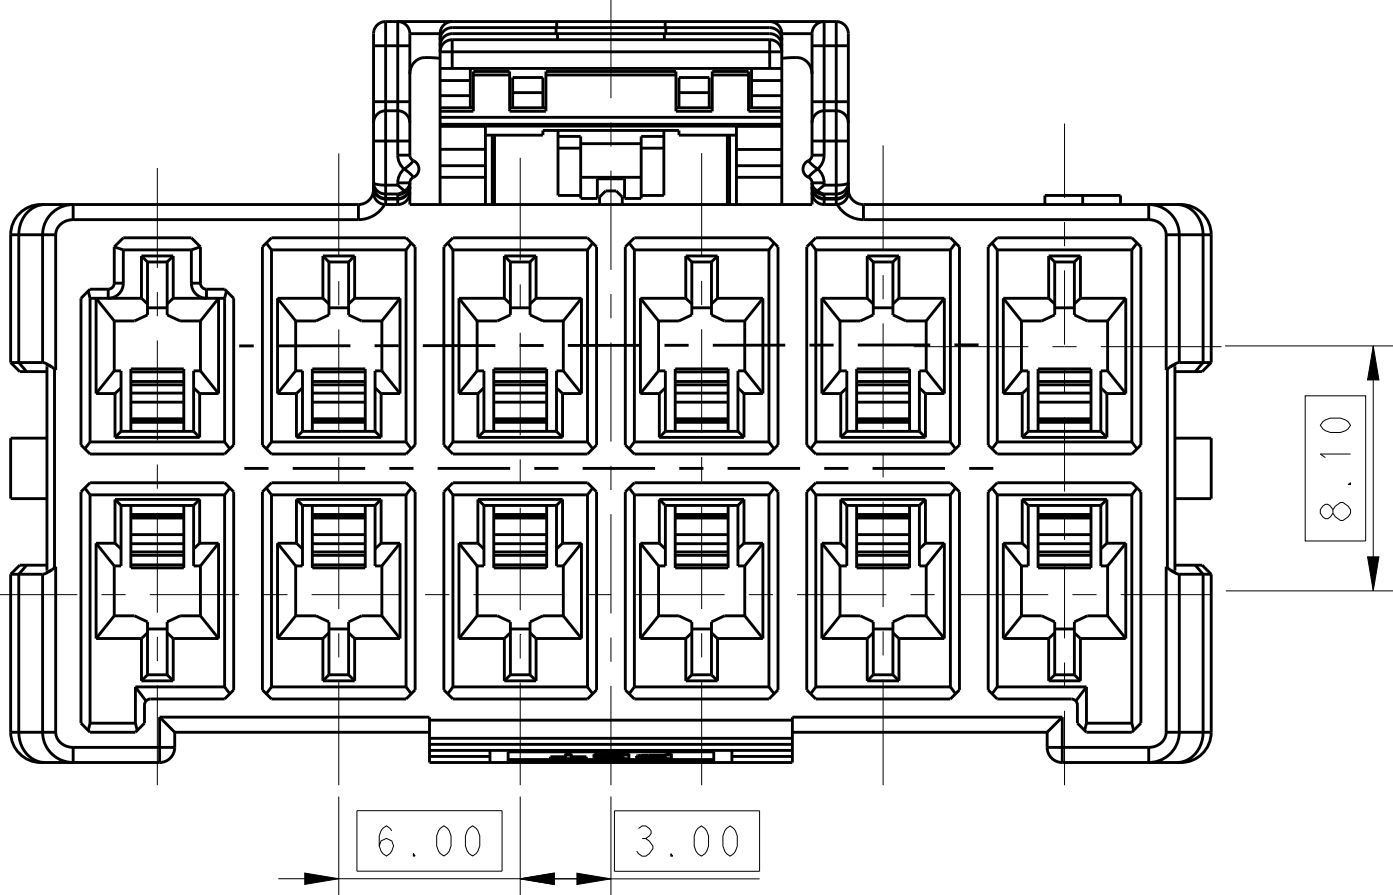

NOTE



1. MATERIAL:
- LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
- LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:
- LEVEL A:GWT,LEVEL B:HWT


3. APPLICABLE CONTACT P/N
- REC CONTACT:1971237/1971779/81/83/85/87-\*

4. MATING CONN, P/N
- CAP HSG: \*-2232359/264-\*
- DOUBLE LOCK PLATE: \*-1971778-\*


5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE WU		26MAR2013			
DIMENSIONS:		APVD	YUJHONG MAO		26MAR2013		NAME	
mm								
		TOLEANCES, UNLESS OTHERWISE SPECIFIED:					PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK -	
		0 PLOC		+				
		1 PLOC		±0.35				
		2 PLOC		±0.25				
		3 PLOC		+				
		4 PLOC		+				
		ANGLES		±				
		FINISH						
MATERIAL							RESTRICTED TO	
-							-	
		Customer Drawing						
		WEIGHT					-	
		SIZE					CASE CODE	
		A1					00779	
		C					2232266	
		SCALE					-	
		SHEET					1	
		OF					2	
		REV					A2	


LOC		DIST		REVISIONS				
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			-	SEE SHEET 1	-	-	-	
	</							

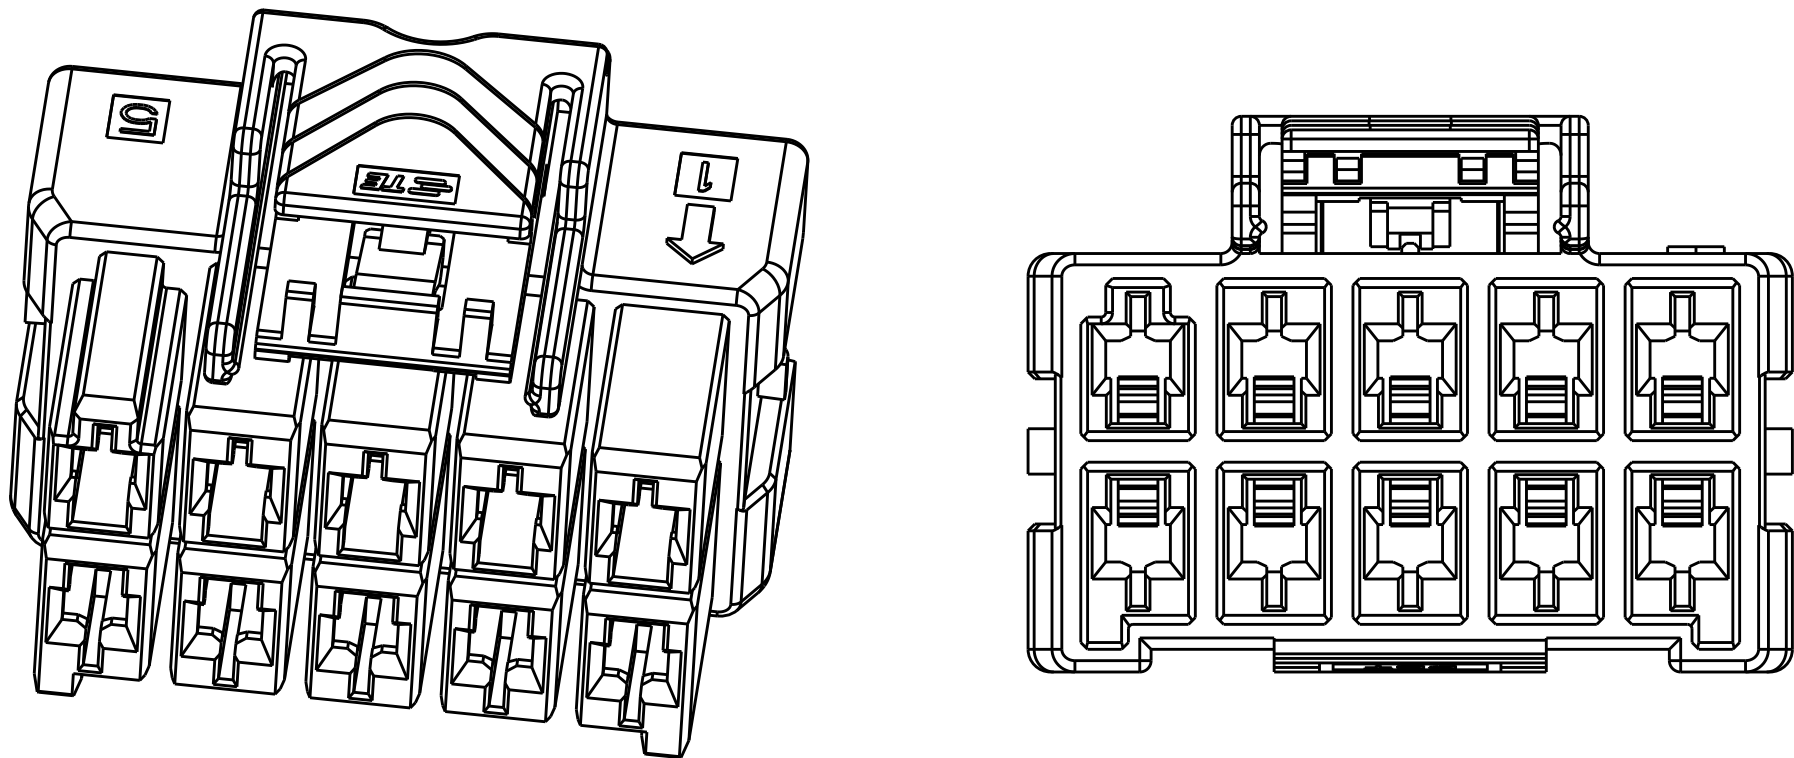


2\*5 POSITIONS

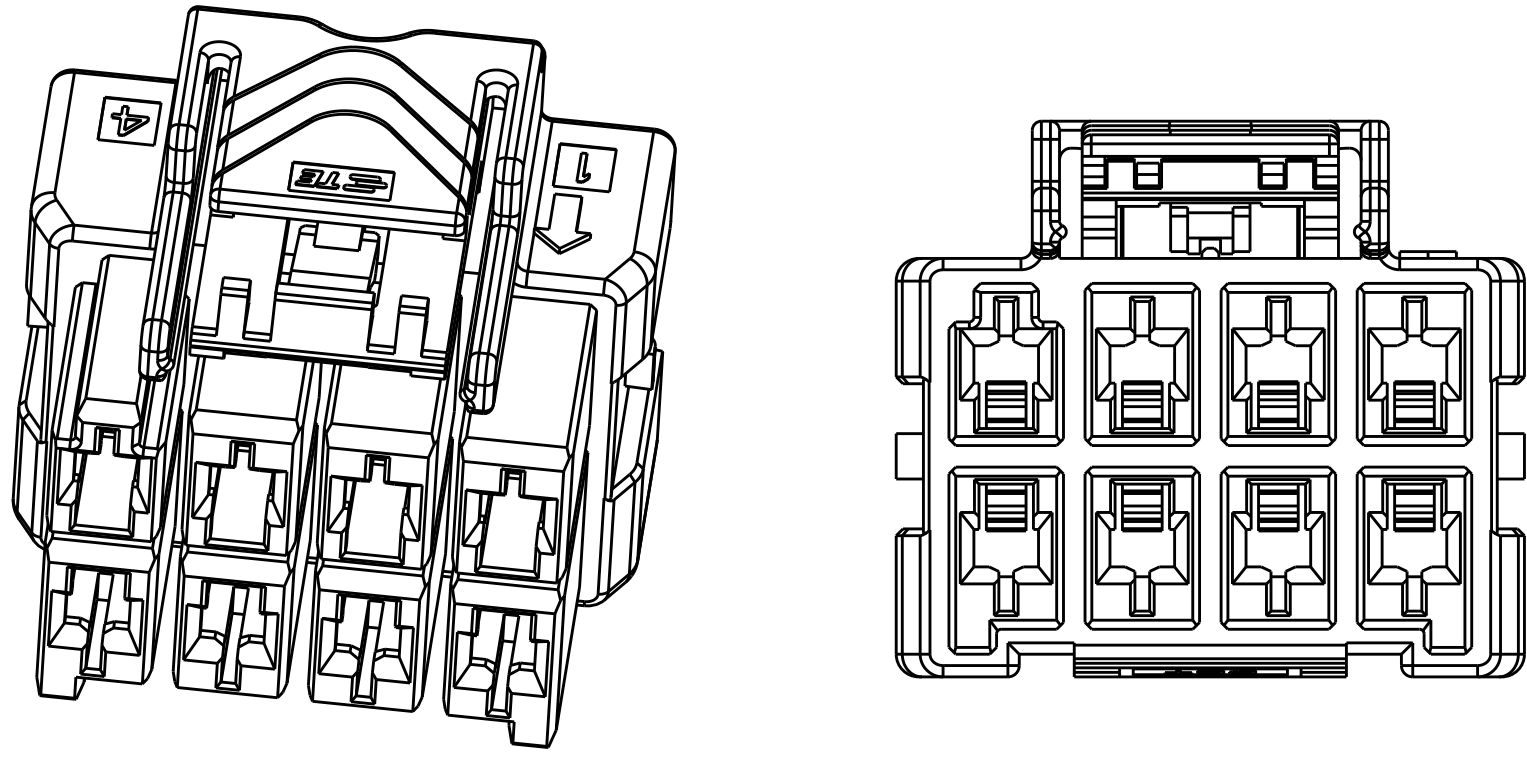


2\*4 POSITIONS

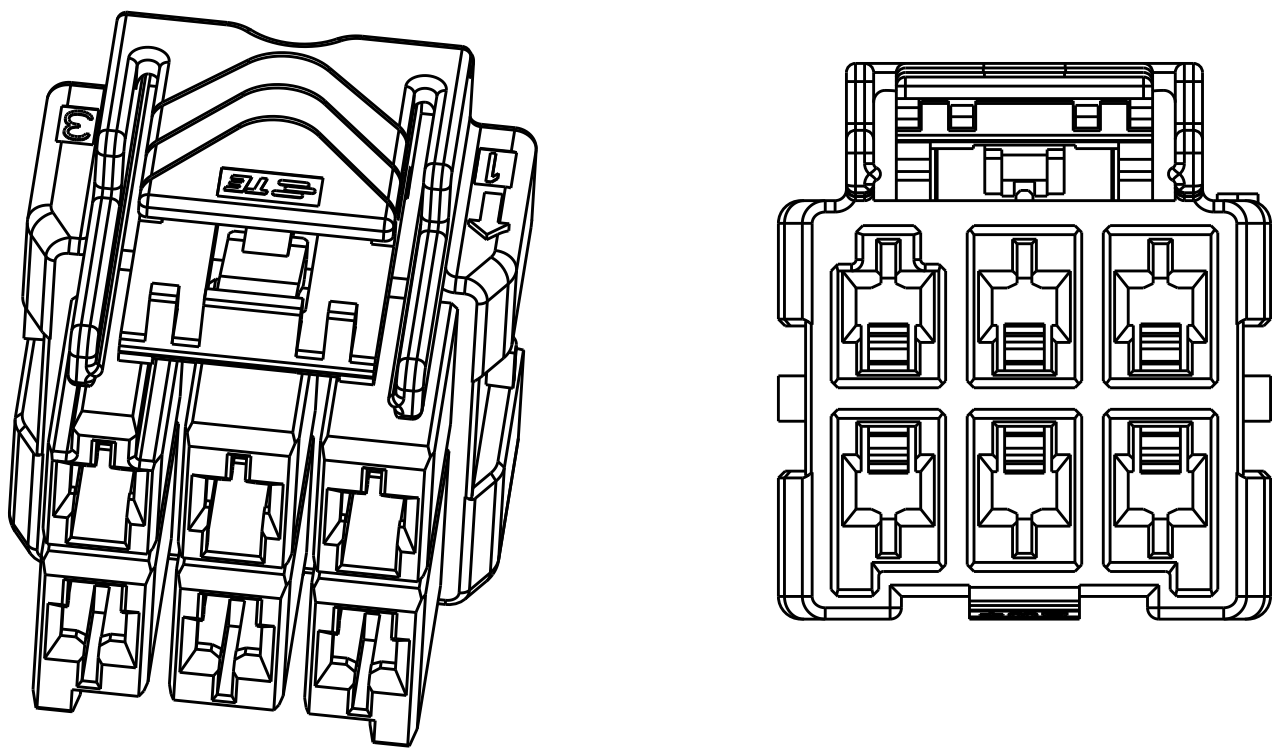


2\*3 POSITIONS

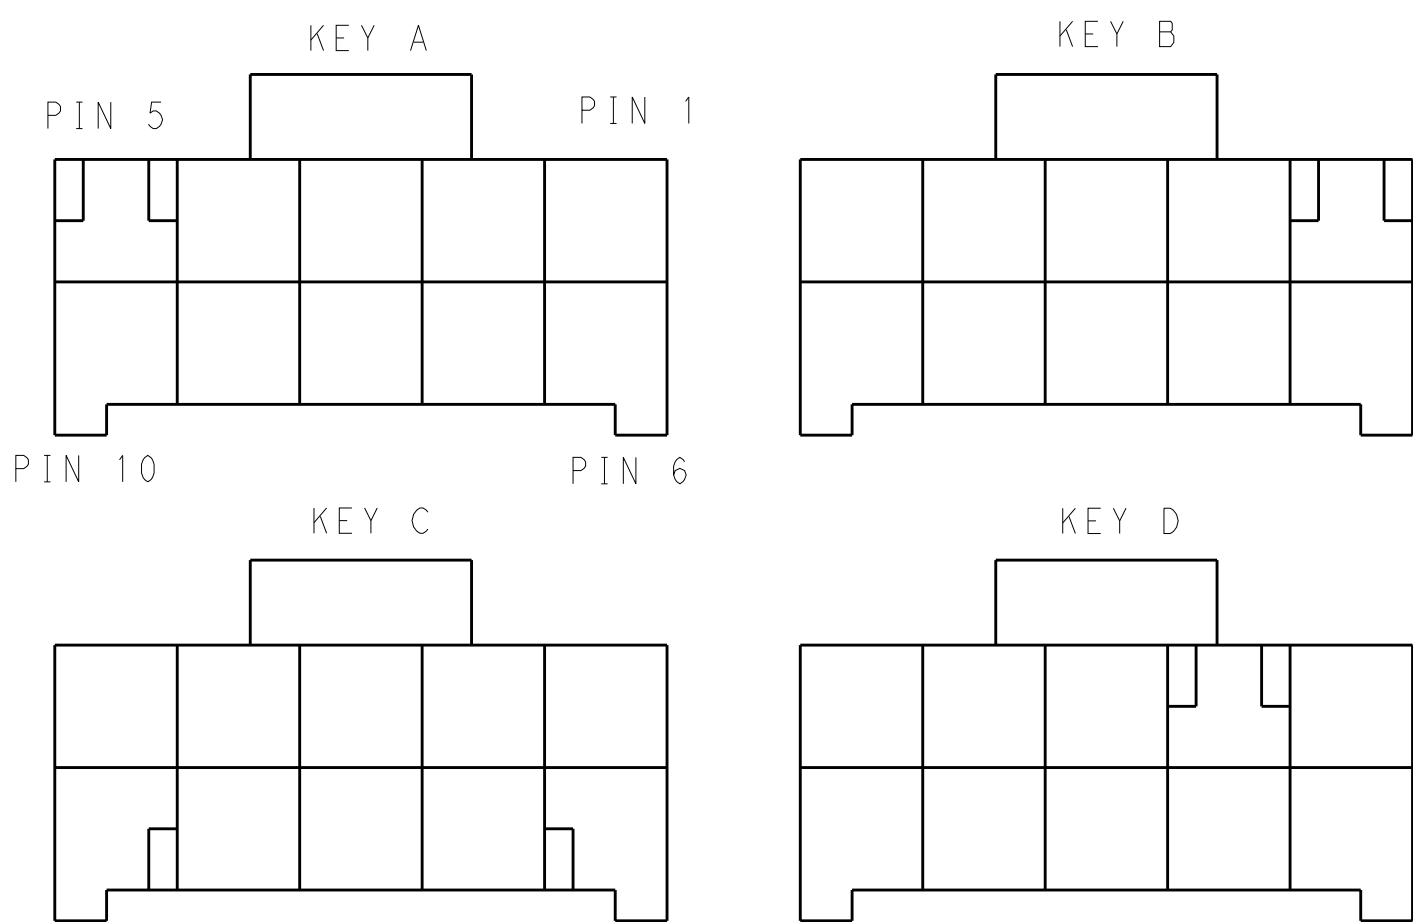


KEYING FOR 2\*5 POS.

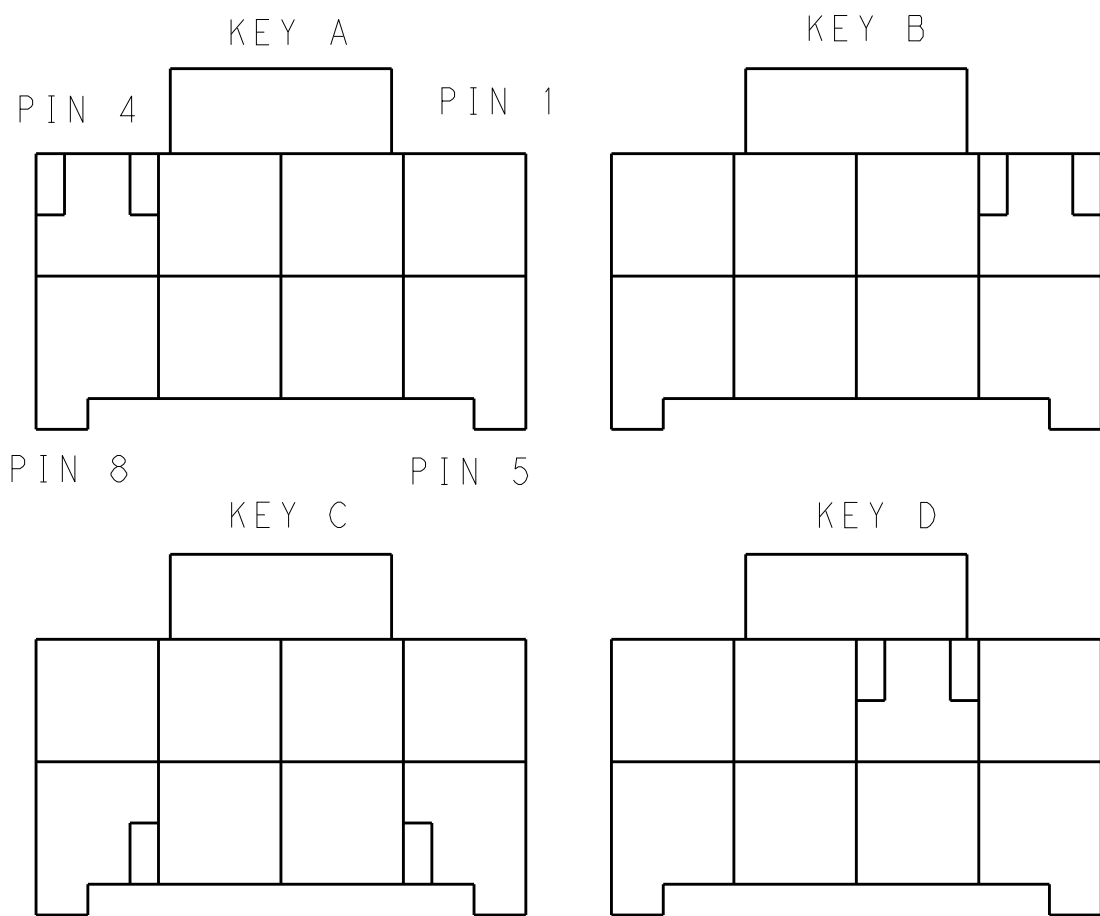


KEYING FOR 2\*4 POS.

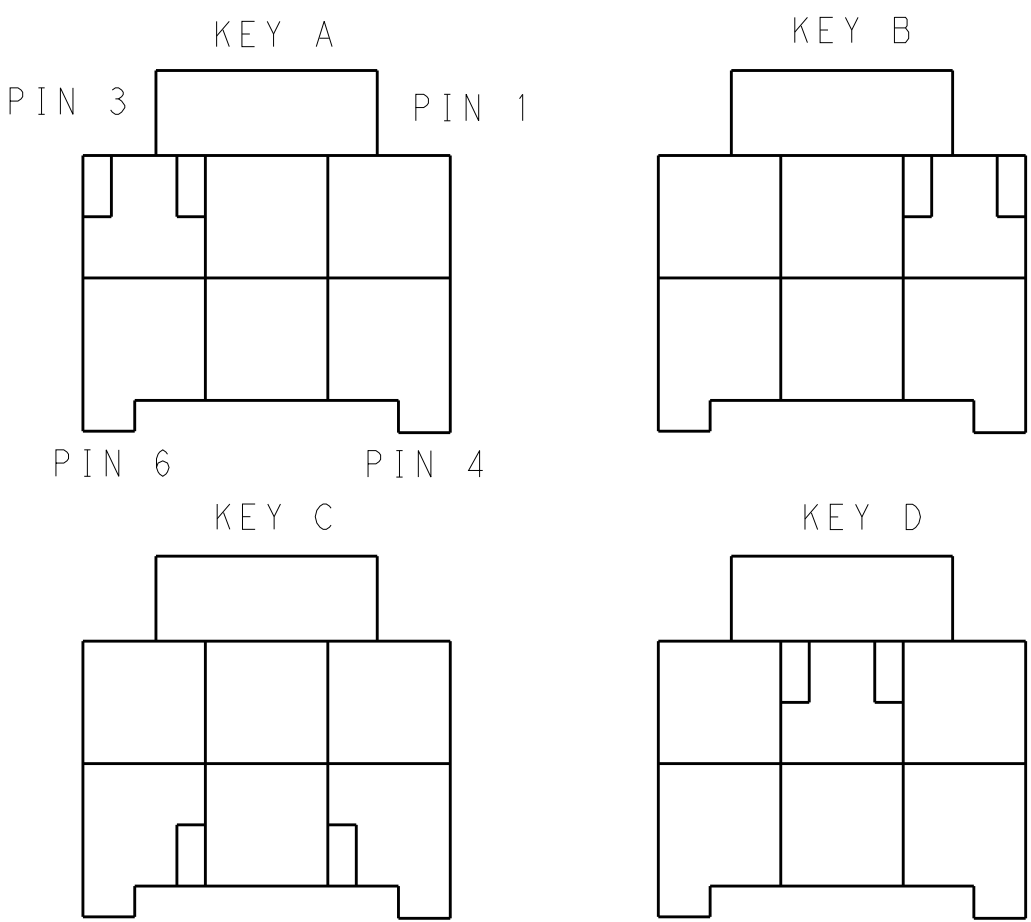

KEYING FOR 2\*3 POS.

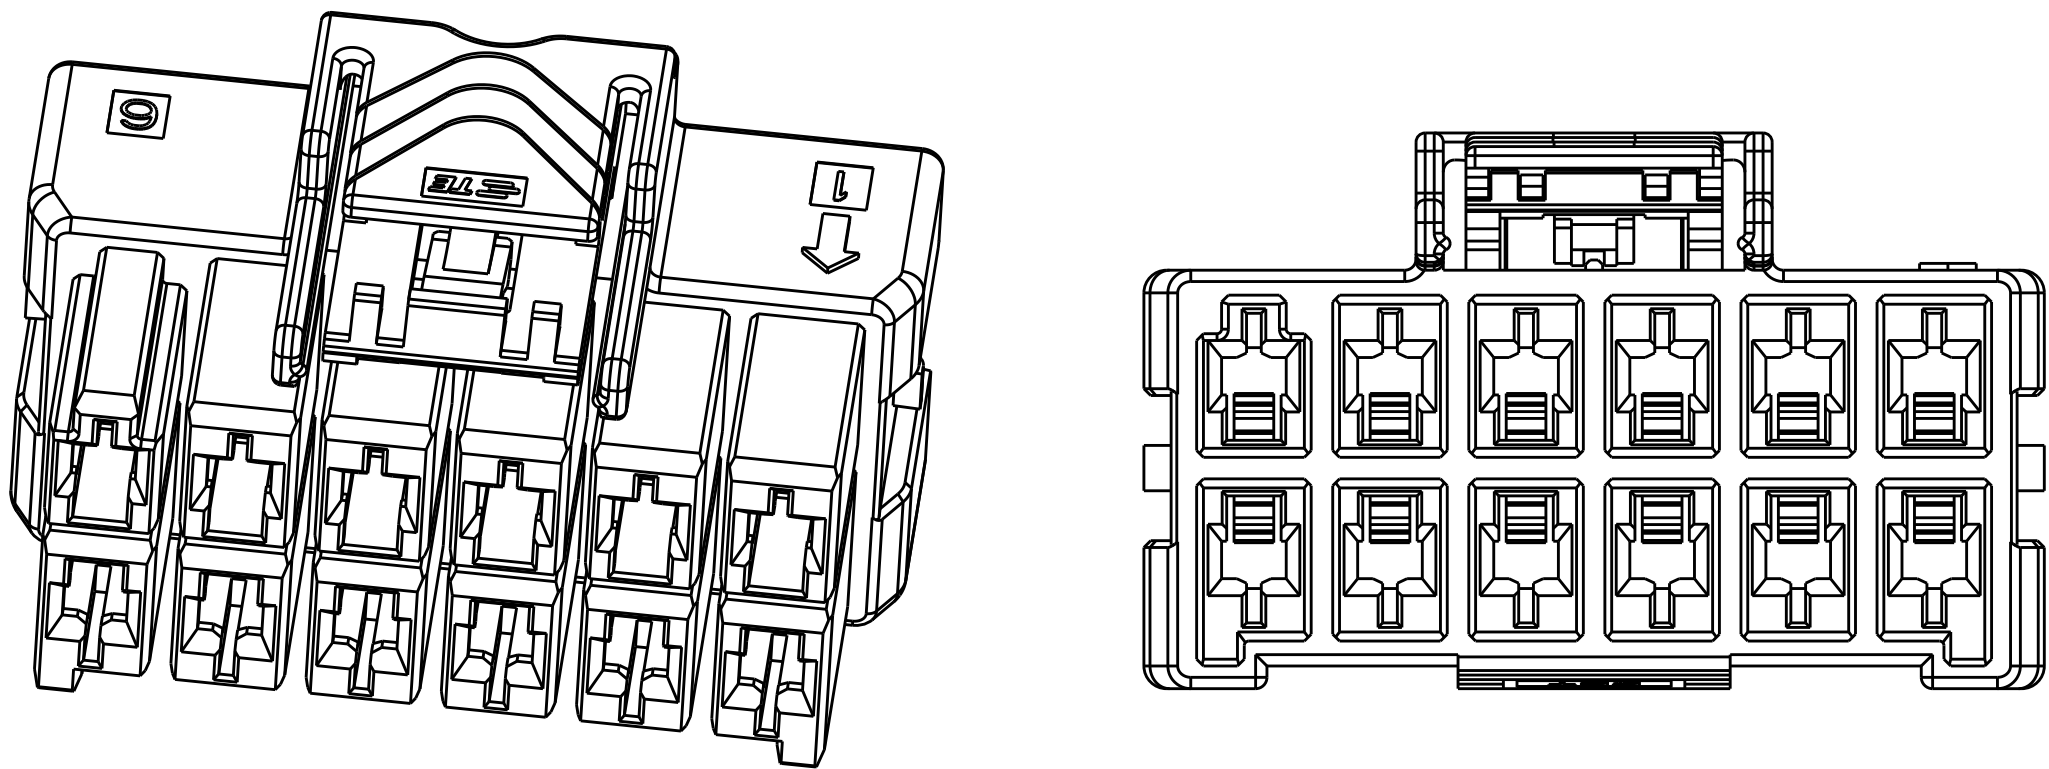

2\*6 POSITIONS

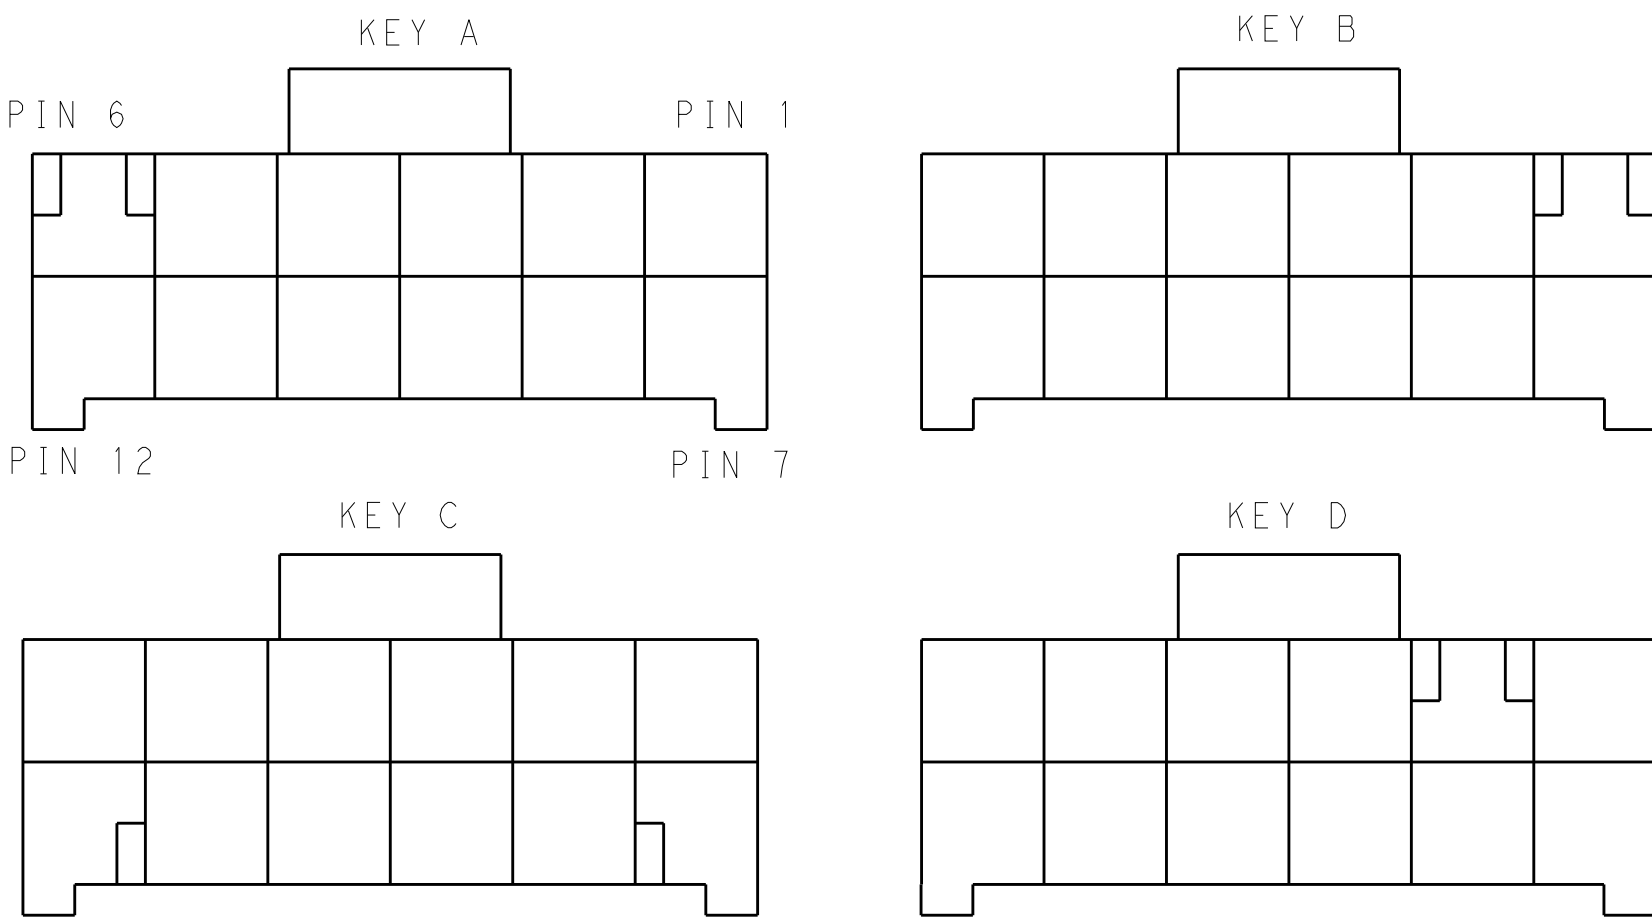

KEYING FOR 2\*6 POS.

2*6	LEVEL A	DARK GREY	KEY A	5-2232266-6
		BROWN	KEY B	6-2232266-6
		GREEN	KEY C	7-2232266-6
		ORANGE	KEY D	8-2232266-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232266-5
		BROWN	KEY B	6-2232266-5
		GREEN	KEY C	7-2232266-5
		ORANGE	KEY D	8-2232266-5
POS.	MATERIAL	COLOR	KEY	P/N

2*4	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-4
		GREEN	KEY C	7-2232266-4
		ORANGE	KEY D	8-2232266-4
2*3	LEVEL A	DARK GREY	KEY A	5-2232266-3
		BROWN	KEY B	6-2232266-3
		GREEN	KEY C	7-2232266-3
		ORANGE	KEY D	8-2232266-3
	LEVEL B	BLACK	KEY A	1-2232266-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY\_WU 26MAR2013  
CHK HAPYE\_WU 26MAR2013  
APVD YUIHONG\_MAO 26MAR2013

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-  
1 PLC ±0.35  
2 PLC ±0.25  
3 PLC ±-  
4 PLC ±-  
ANGLES ±-  
FINISH ±-

MATERIAL

-

Customer Drawing

SCALE

SHEET 2 OF 2

REV A2

TE Connectivity

NAME

PLUG HOUSING,DOUBLE ROW  
POWER TRIPLE LOCK

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779

2232266

-