

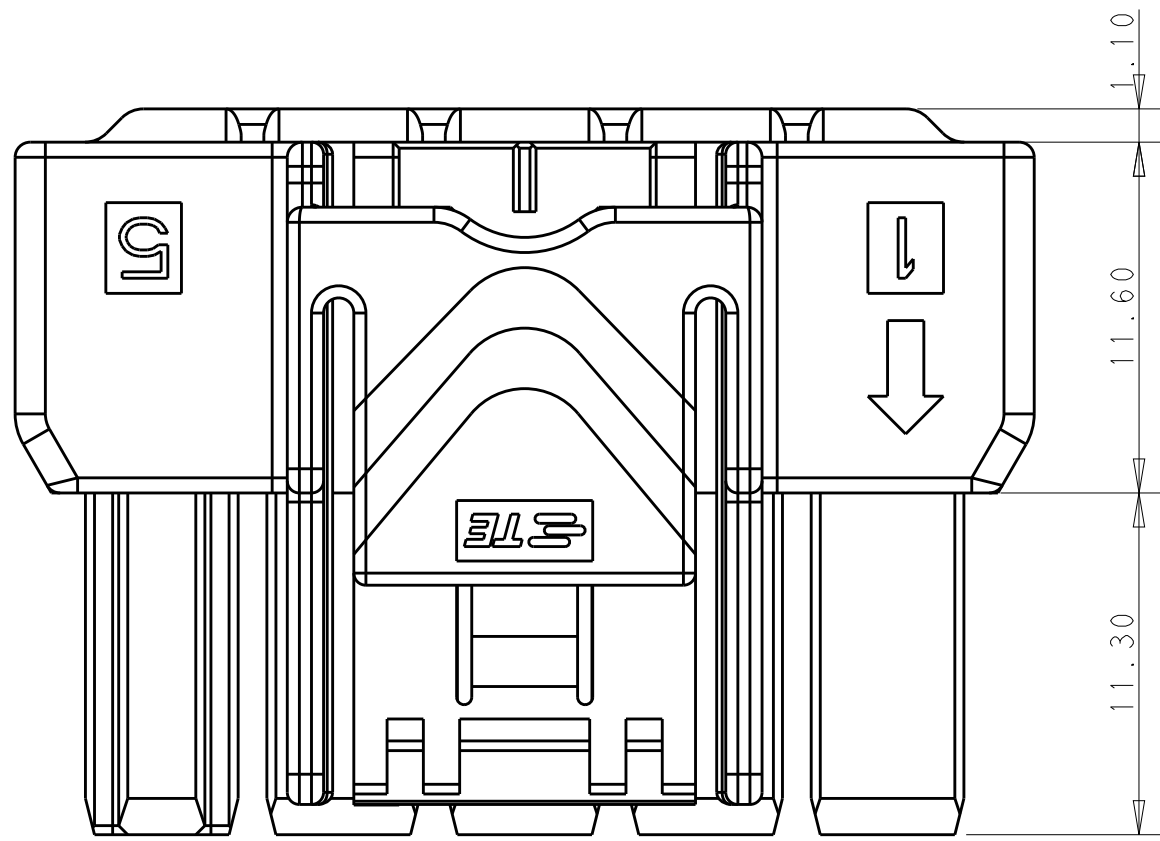
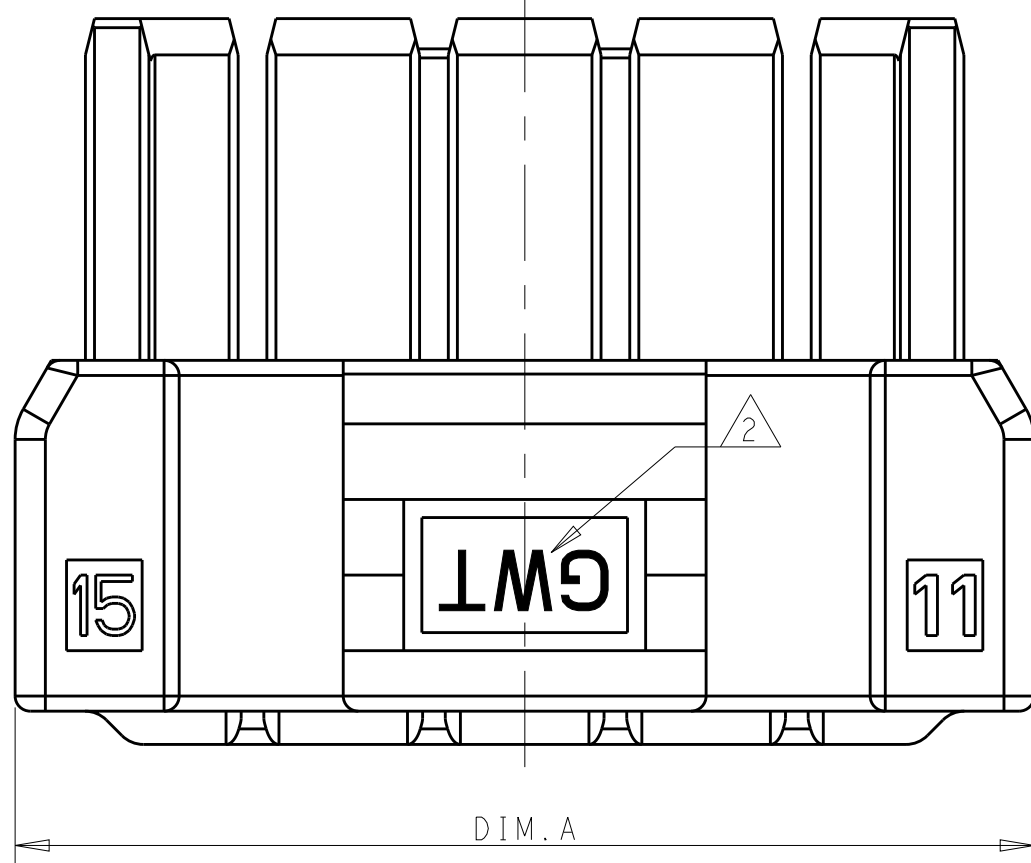
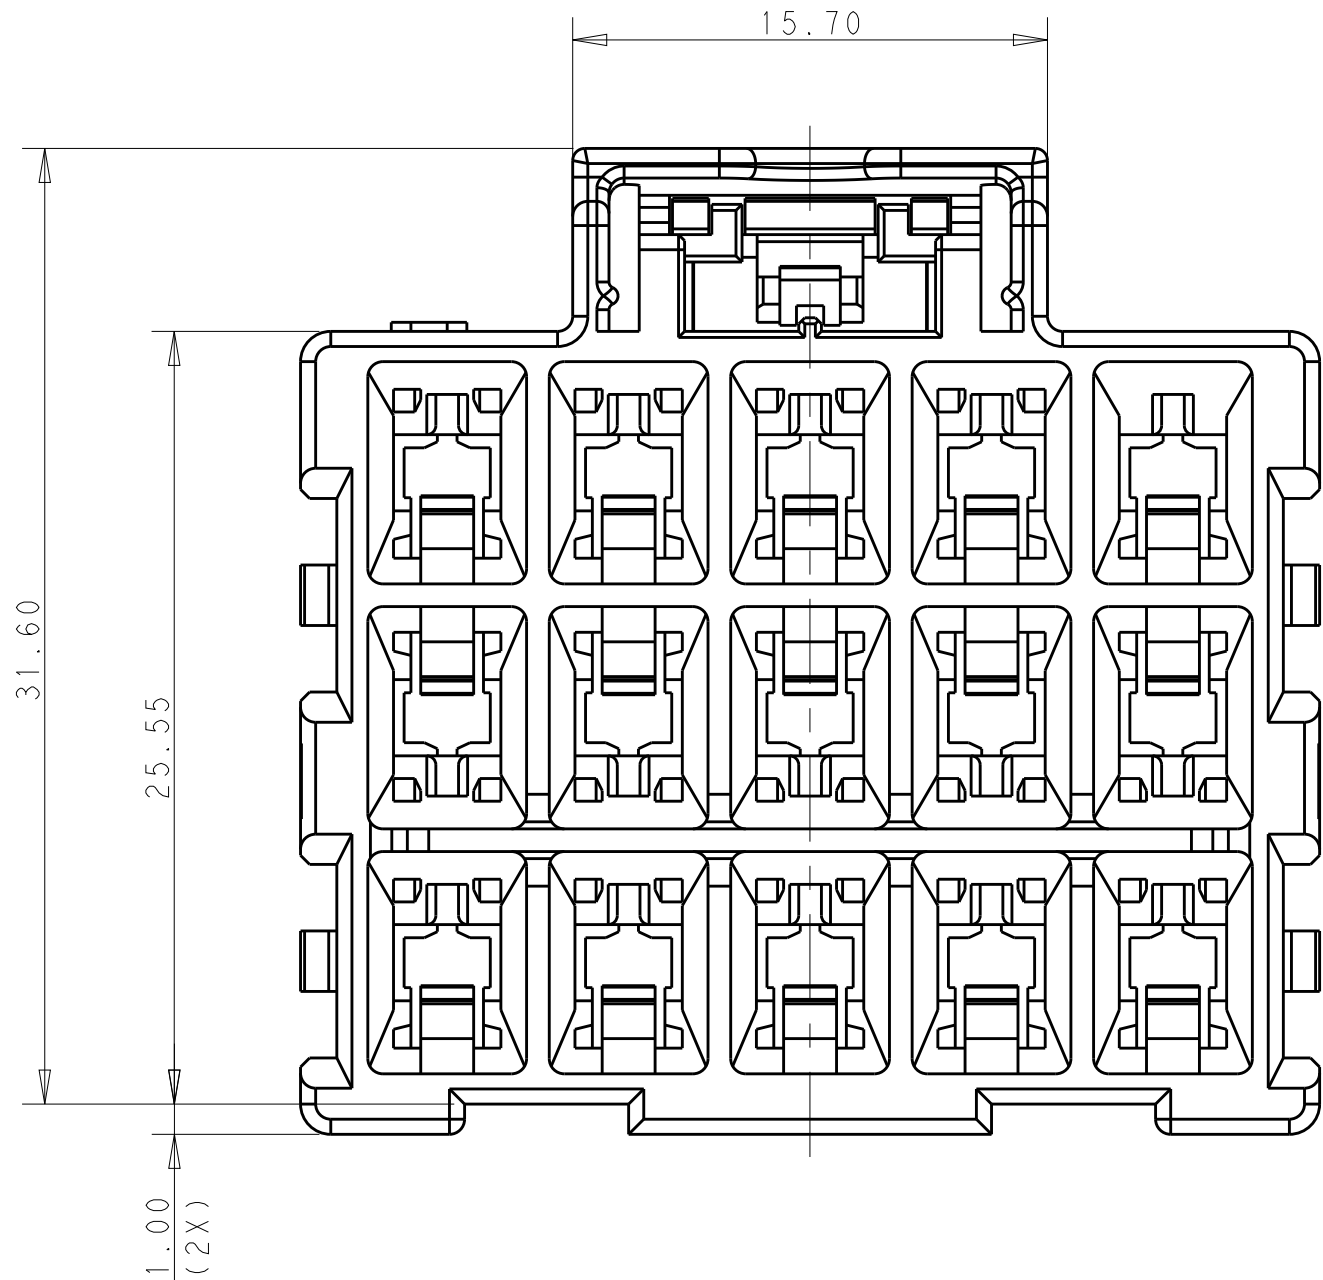


LOC		DIST		REVISIONS						
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD	
					A2	REVISED PER ECR-14-002441	25FEB2014	NK	GJ	

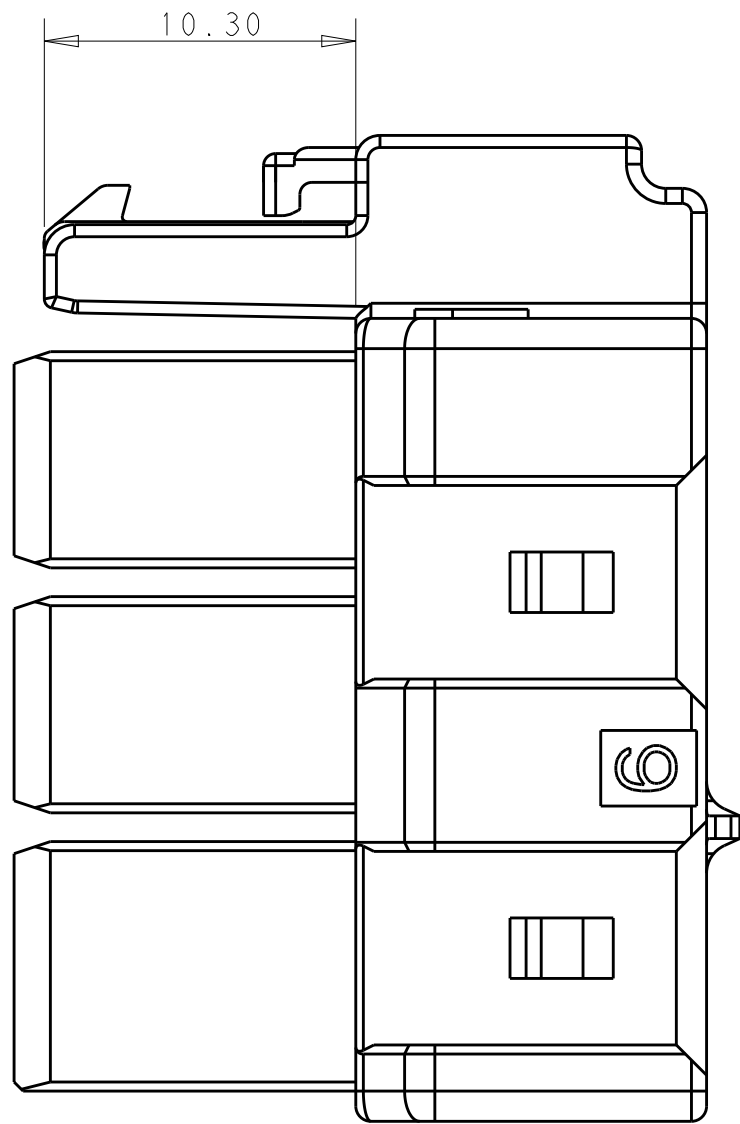

POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

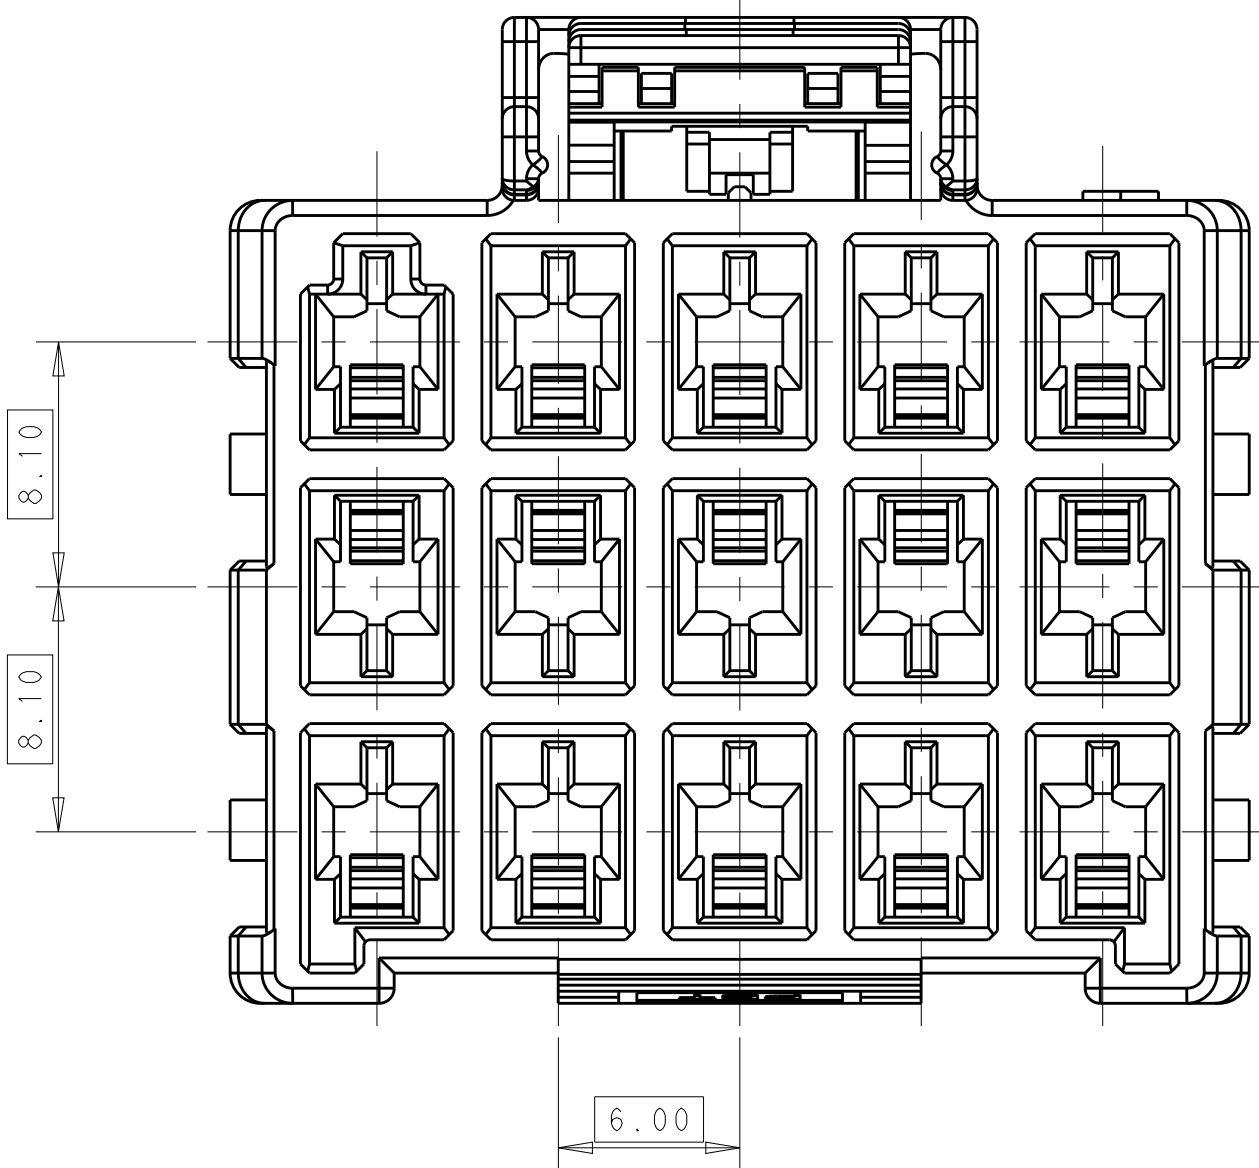

1. MATERIAL:
LEVEL A: PA6 ,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B: PBT,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0



2. MATERIAL MARK:
LEVEL A: GWT,LEVEL B: HWT

3. APPLICABLE CONTACT P/N
REC CONTACT: 1971237/1971779/81/83/85/87-*







4. MATING CONN. P/N
CAP HSG: *-2232356/60-
DOUBLE ROW LOCK PLATE: *-1971778-*;SINGLE ROW LOCK PLATE: *-1971777-*

5. PRELIMINARY - NOT FOR PRODUCTION.

6. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU	26MAR2013	 TE Connectivity			
		CHK HAPYE_WU	26MAR2013				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		PLUG HOUSING,TRIPLE ROW POWER TRIPLE LOCK	
mm							
		0 PL C	±.	PRODUCT SPEC	SIZE		
		1 PL C	±0.35				
		2 PL C	±0.25				
		3 PL C	±.				
MATERIAL		4 PL C	±.	APPLICATION SPEC	DRAWING NO		
		ANGLES	±.	114-106118	RESTRICTED TO		
		FINISH	-	WEIGHT	A100779C-2232357		
			-	Customer Drawing	SCALE		
			-		SHEET 1 OF 2		
			-		REV A2		

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	-SEE SHEET 1-	-	-	-

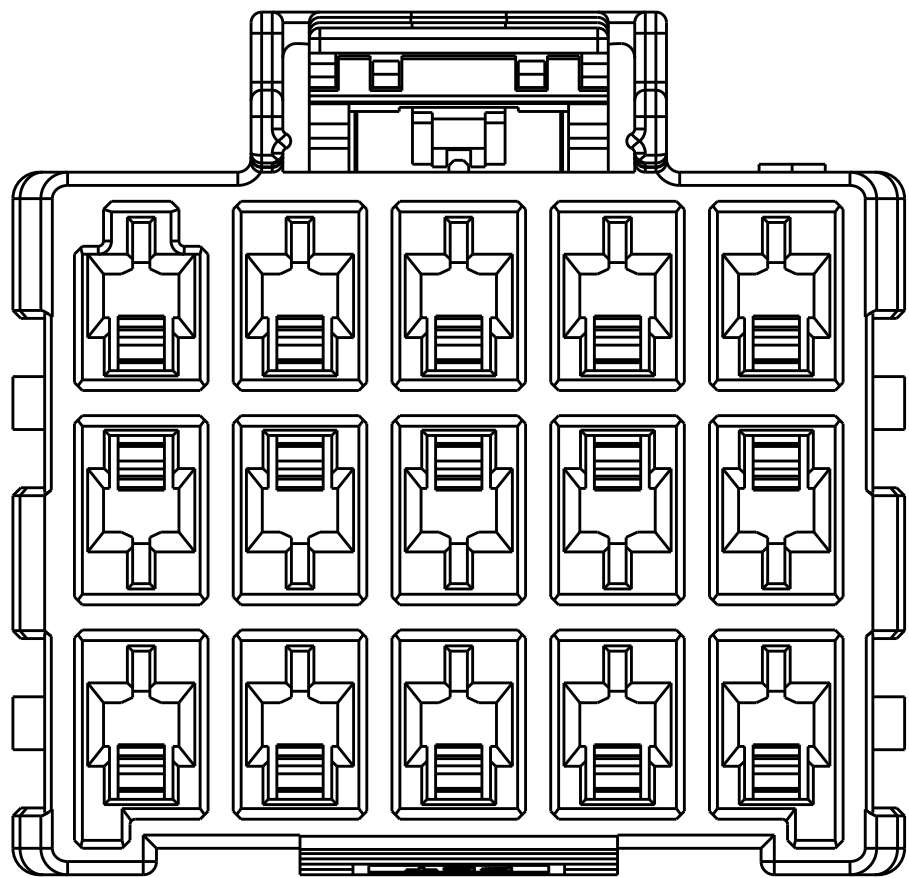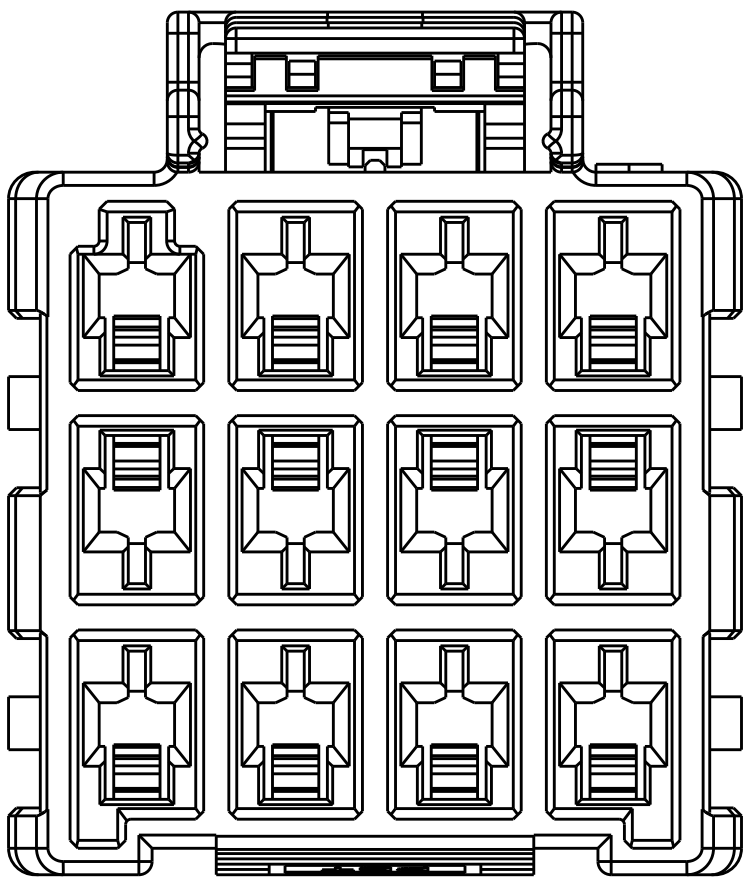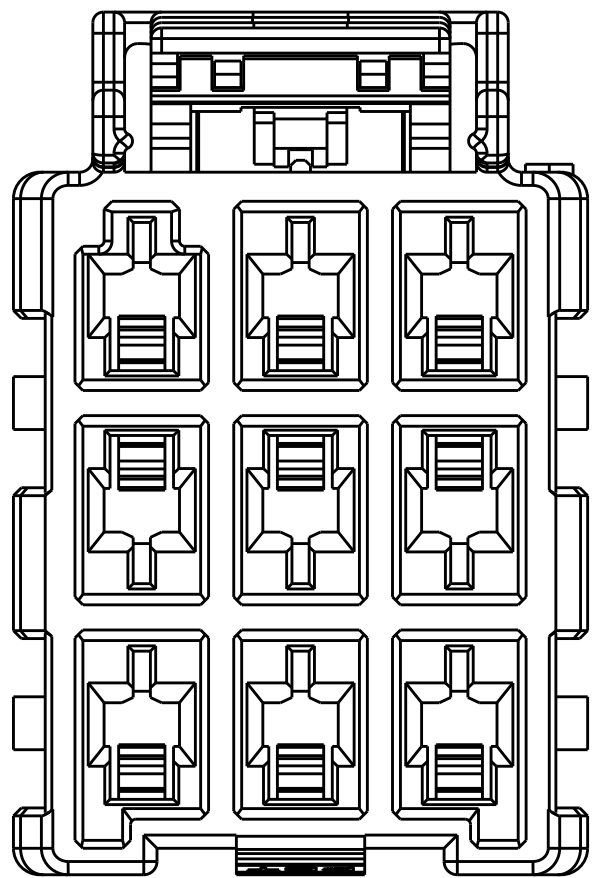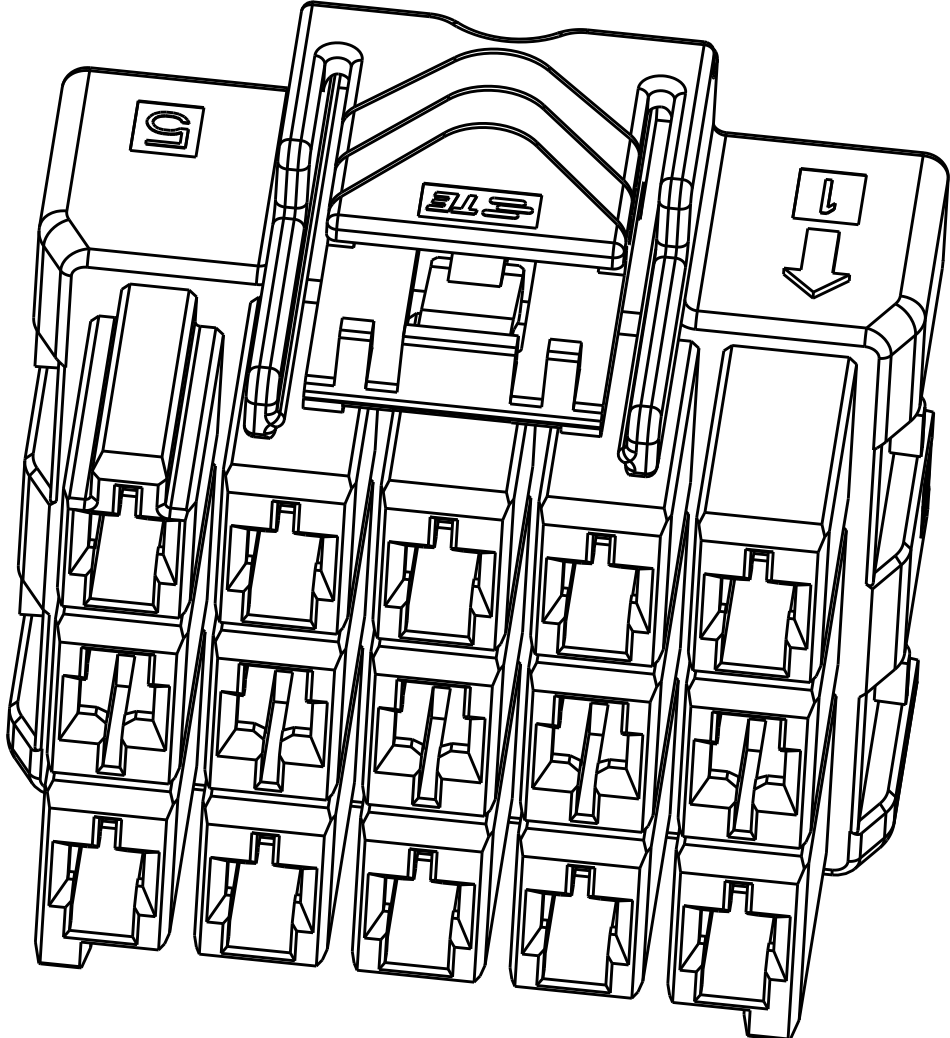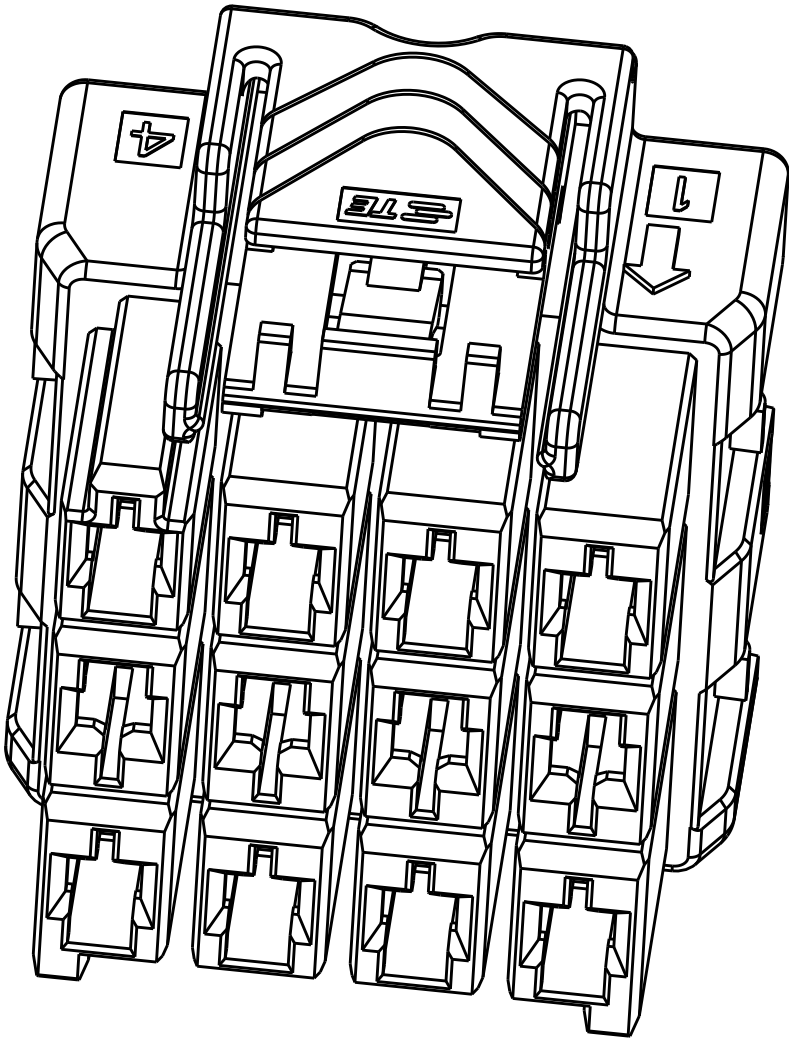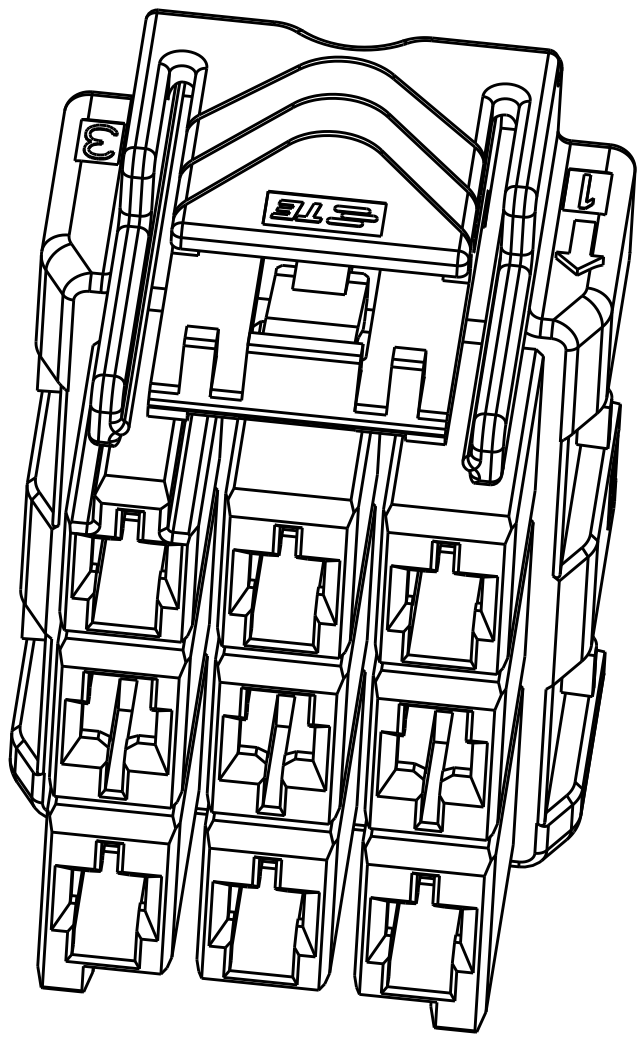


3*5	LEVEL A	DARK GREY	KEY A	5-2232357-7
		BROWN	KEY B	6-2232357-7
		GREEN	KEY C	7-2232357-7
		ORANGE	KEY D	8-2232357-7
3*4	LEVEL A	BLACK	KEY A	1-2232357-5
		DARK GREY	KEY A	5-2232357-4
		BROWN	KEY B	6-2232357-4
		GREEN	KEY C	7-2232357-4
3*3	LEVEL A	ORANGE	KEY D	8-2232357-4
		BLACK	KEY A	1-2232357-4
		DARK GREY	KEY A	5-2232357-3
		BROWN	KEY B	6-2232357-3
POS.	MATERIAL	GREEN	KEY C	7-2232357-3
		ORANGE	KEY D	8-2232357-3
		BLACK	KEY A	1-2232357-6
		COLOR	KEY	P/N


3*3 POSITIONS

3*4 POSITIONS


3*5 POSITIONS

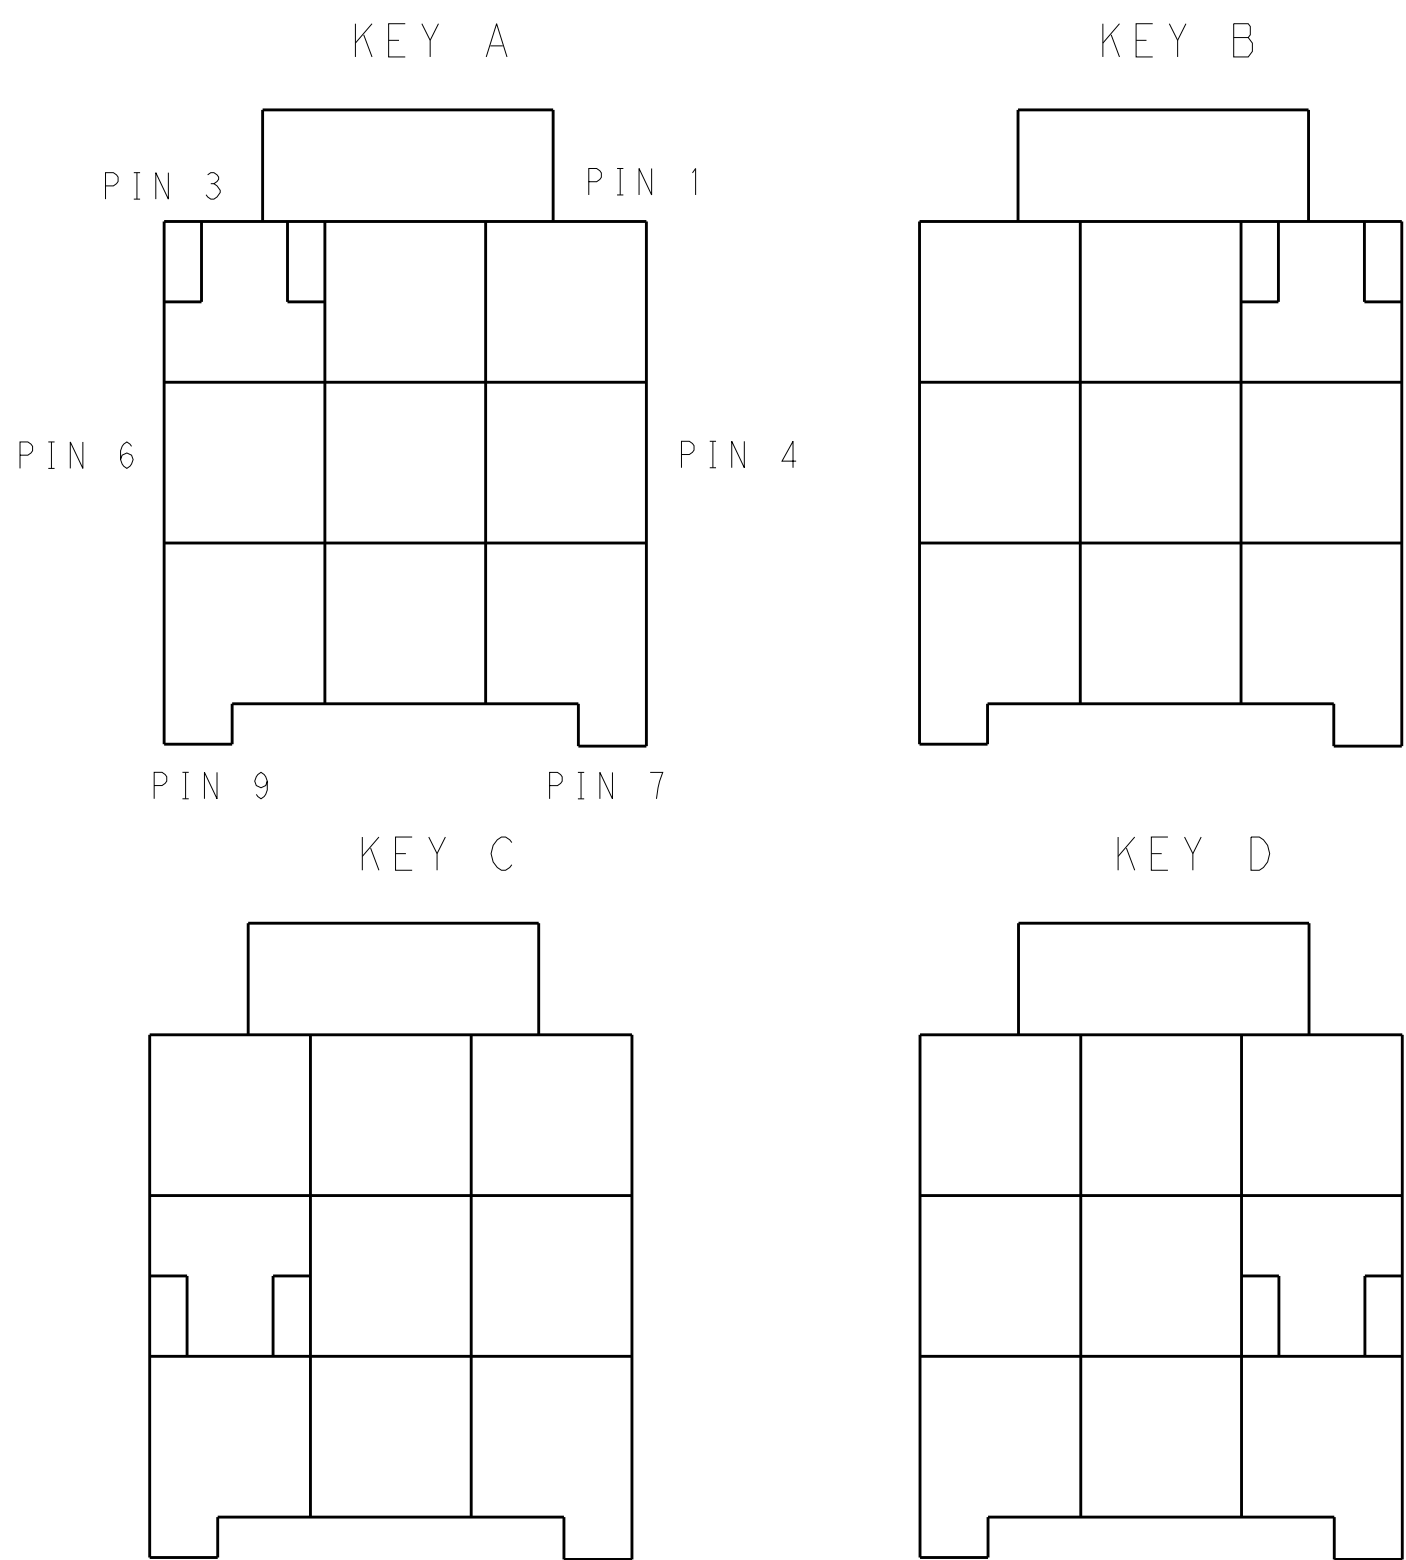

KEYING FOR 3*3 POS.

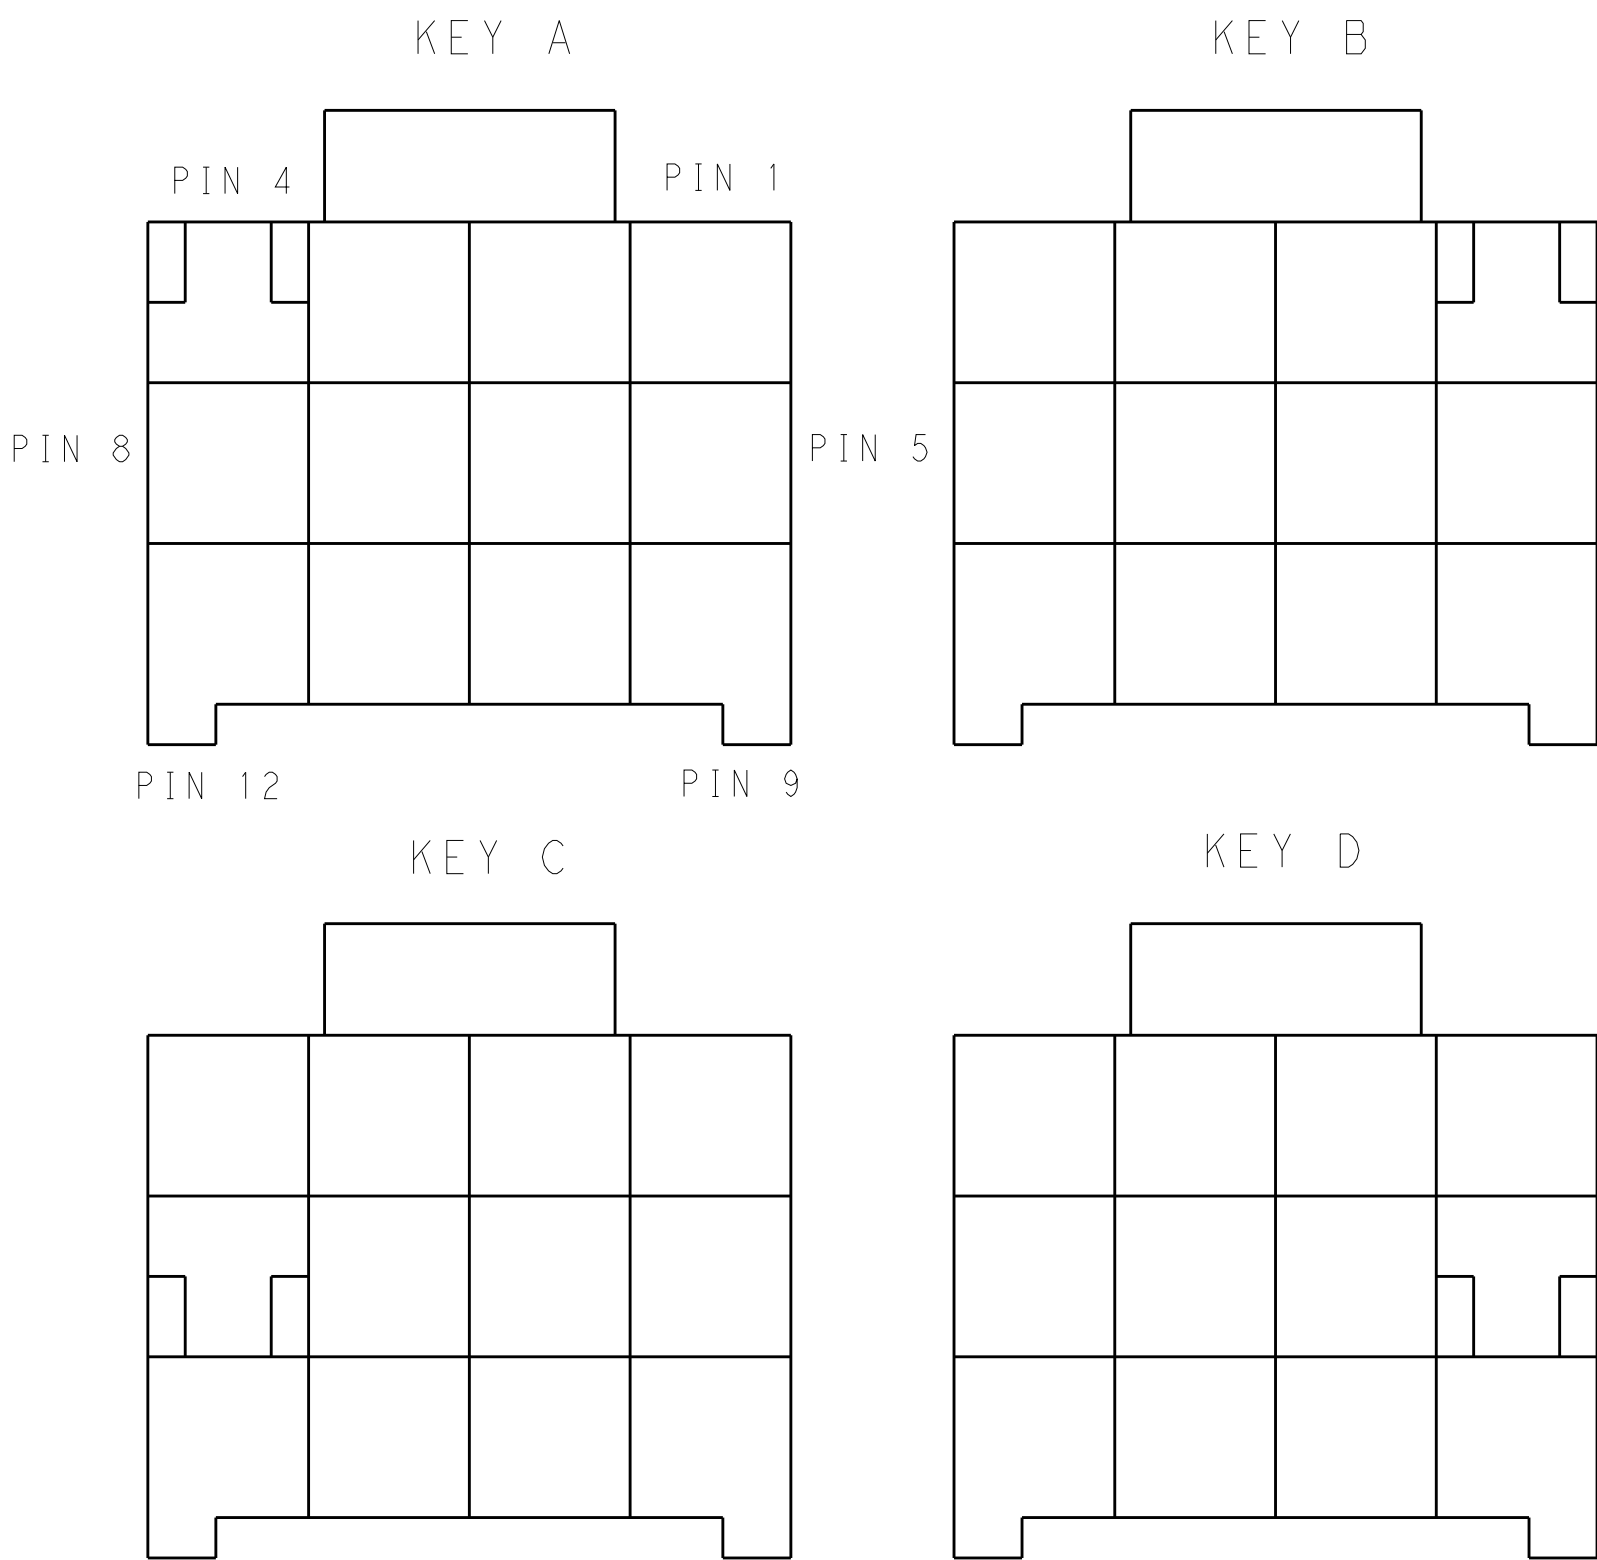

KEYING FOR 3*4 POS.

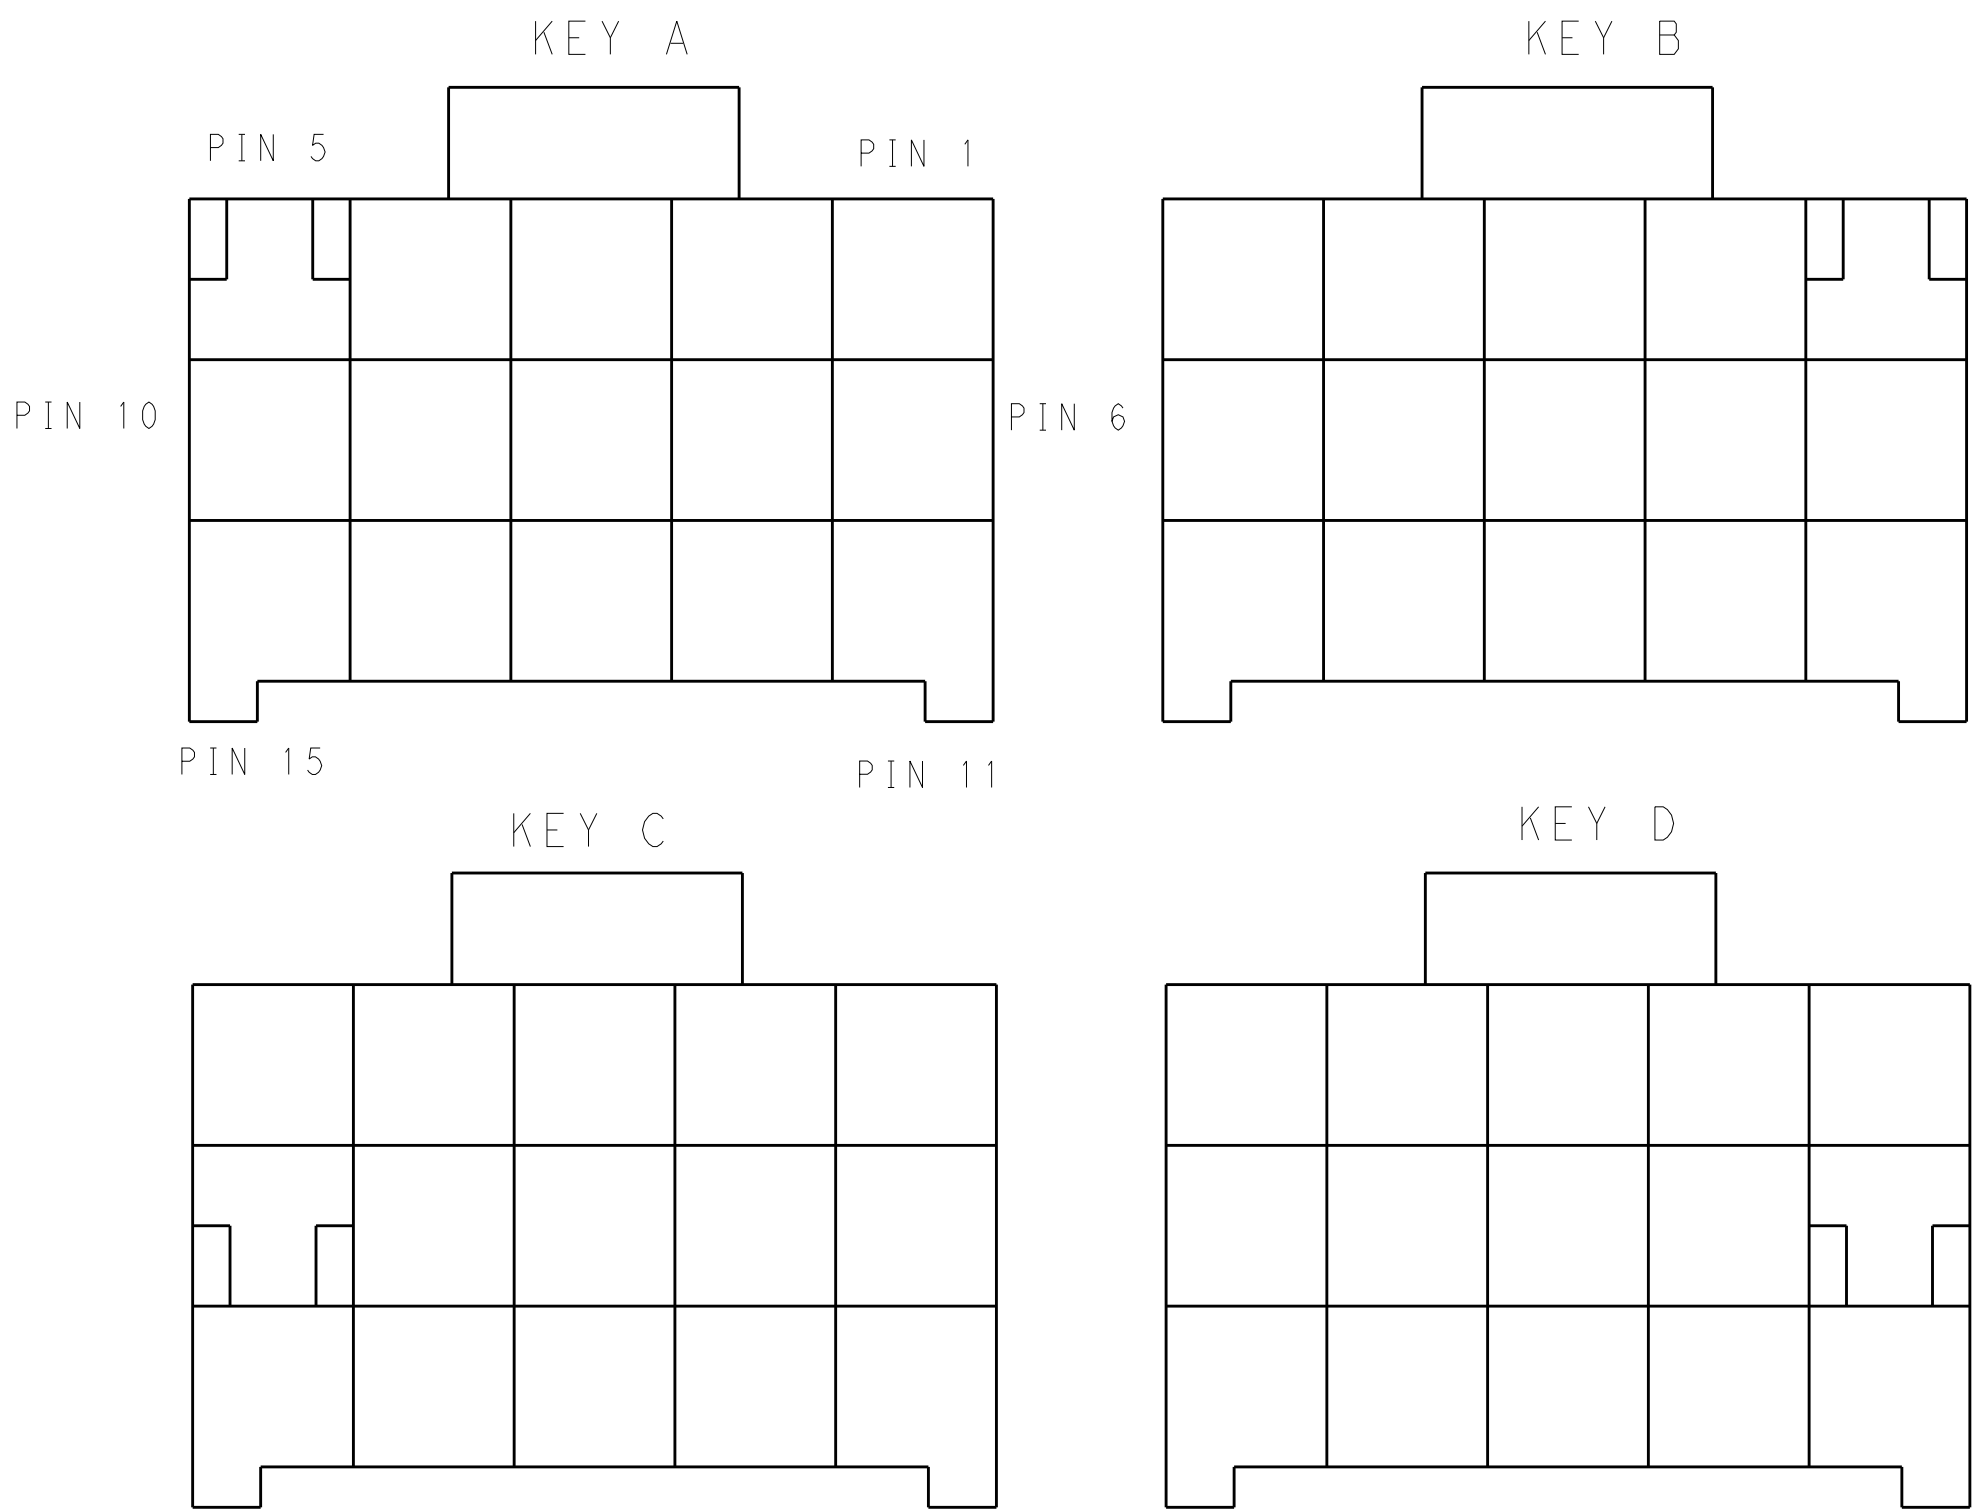

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	TOMMY_WU	26MAR2013	TE Connectivity	
DIMENSIONS:				CHK	HAPYE_WU	26MAR2013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD	YUJHONG_MAO	26MAR2013	NAME	
mm				PRODUCT SPEC			PLUG HOUSING, TRIPLE ROW	
0 PLC ±0.35				108-106118			POWER TRIPLE LOCK	
1 PLC ±0.25				APPLICATION SPEC			-	
2 PLC ±0.25				114-106118			SIZE	
3 PLC ±0.25				WEIGHT			CAGE CODE	
4 PLC ±0.25				Customer Drawing			DRAWING NO	
ANGLES				A100779			RESTRICTED TO	
FINISH				SCALE			SHEET	
MATERIAL				2			OF	
-				2			REV	
-				A2			REV	