


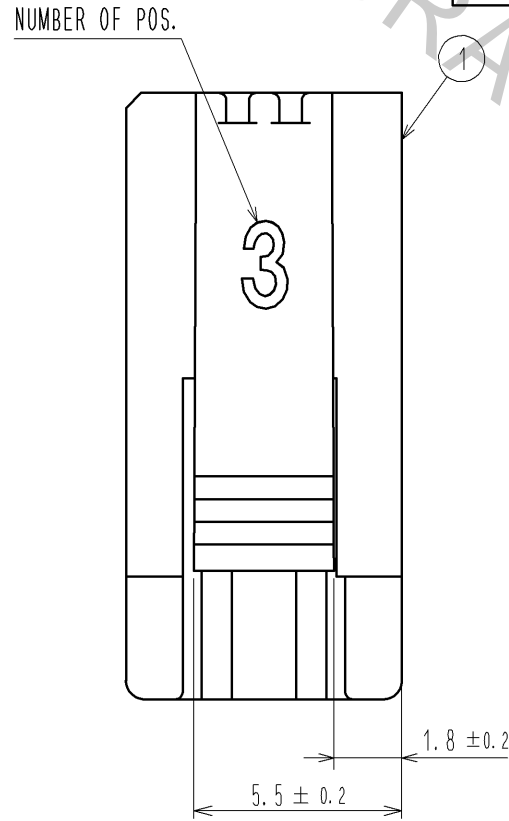
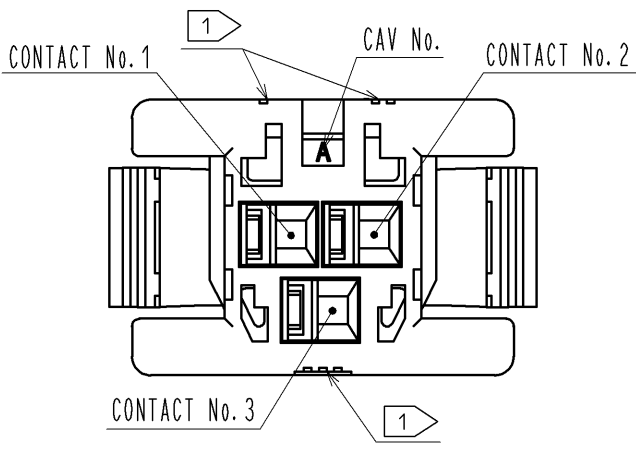



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

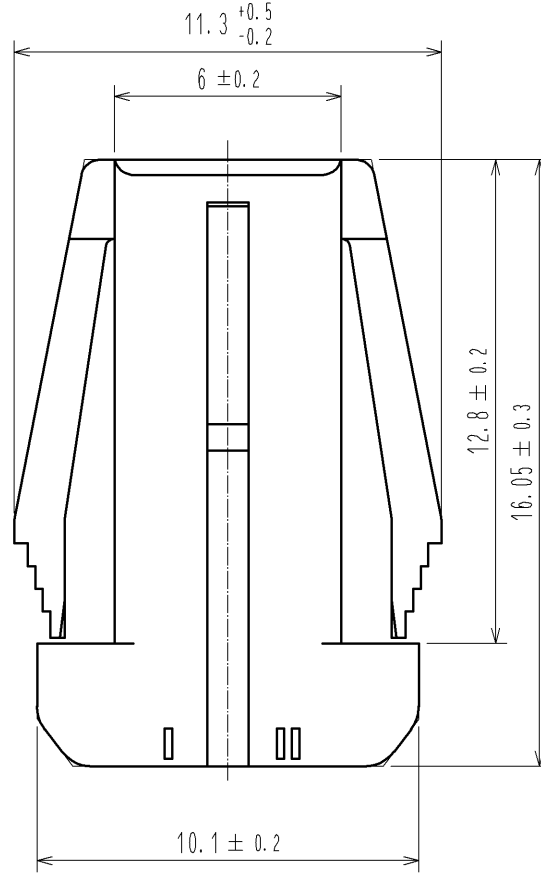


1 FIGURE-1 CONTACT No. MARKING (10:1)

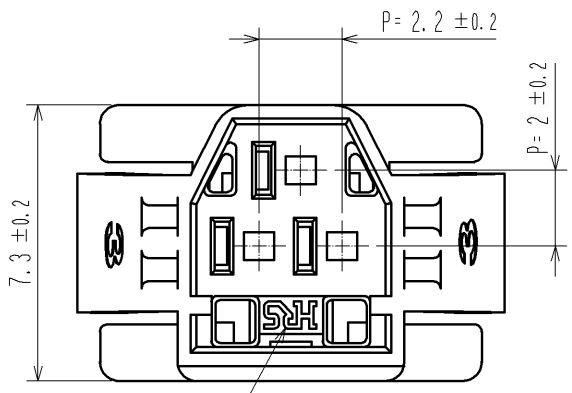

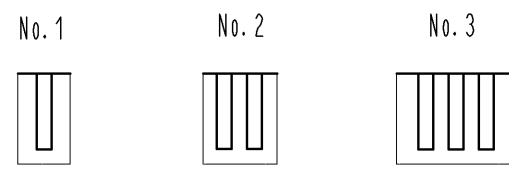


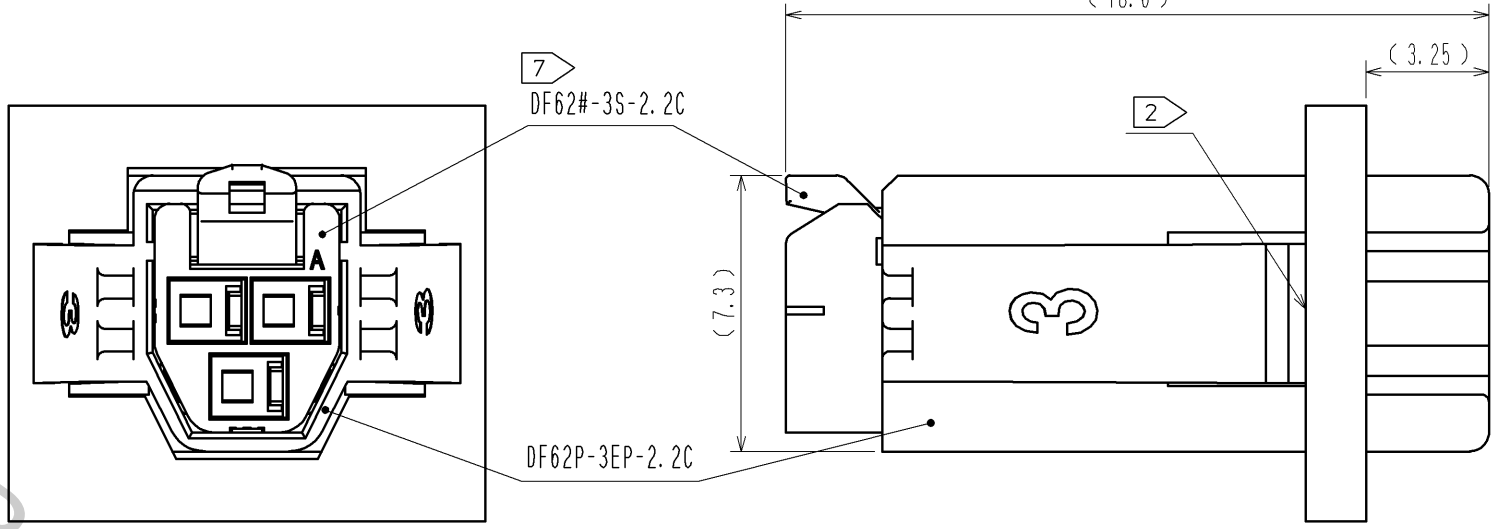
7 MATING FIGURE (PANEL MOUNTED)

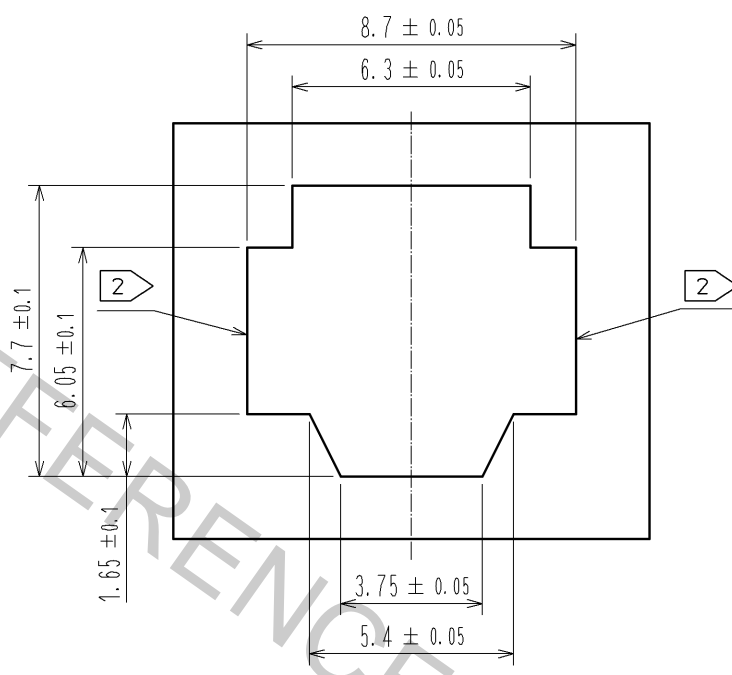

3 4 RECOMMENDED PANEL CUTOUT DIMENSION



- NOTE. 1 MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING, AND SHAPES ARE SHOWN IN FIGURE-1.
2 PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
3 APPLICABLE PANEL THICKNESSING IS 2.3 TO 0.5mm.
4 CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
5. PER PACK : 100 PIECES.
6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
7 THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-3S-2.2C.

NO.			MATERIAL		FINISH . REMARKS			1	PBT		UL94V-0(BLACK)							
NO.			MATERIAL		FINISH . REMARKS													
UNITS mm				SCALE 5 : 1				COUNT		DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED : KI. AKIYAMA				13.12.26		DRAWING NO.		EDC3-349136-00						
				CHECED : OM. MIYAMOTO				13.12.26		PART NO.		DF62P-3EP-2.2C						
				DESIGNED : TH. YOSHIZAWA				13.12.26		CODE NO.		CL544-0544-4-00						
				DRAWN : MI. SAKIMURA				13.12.20				 1/1						