




Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

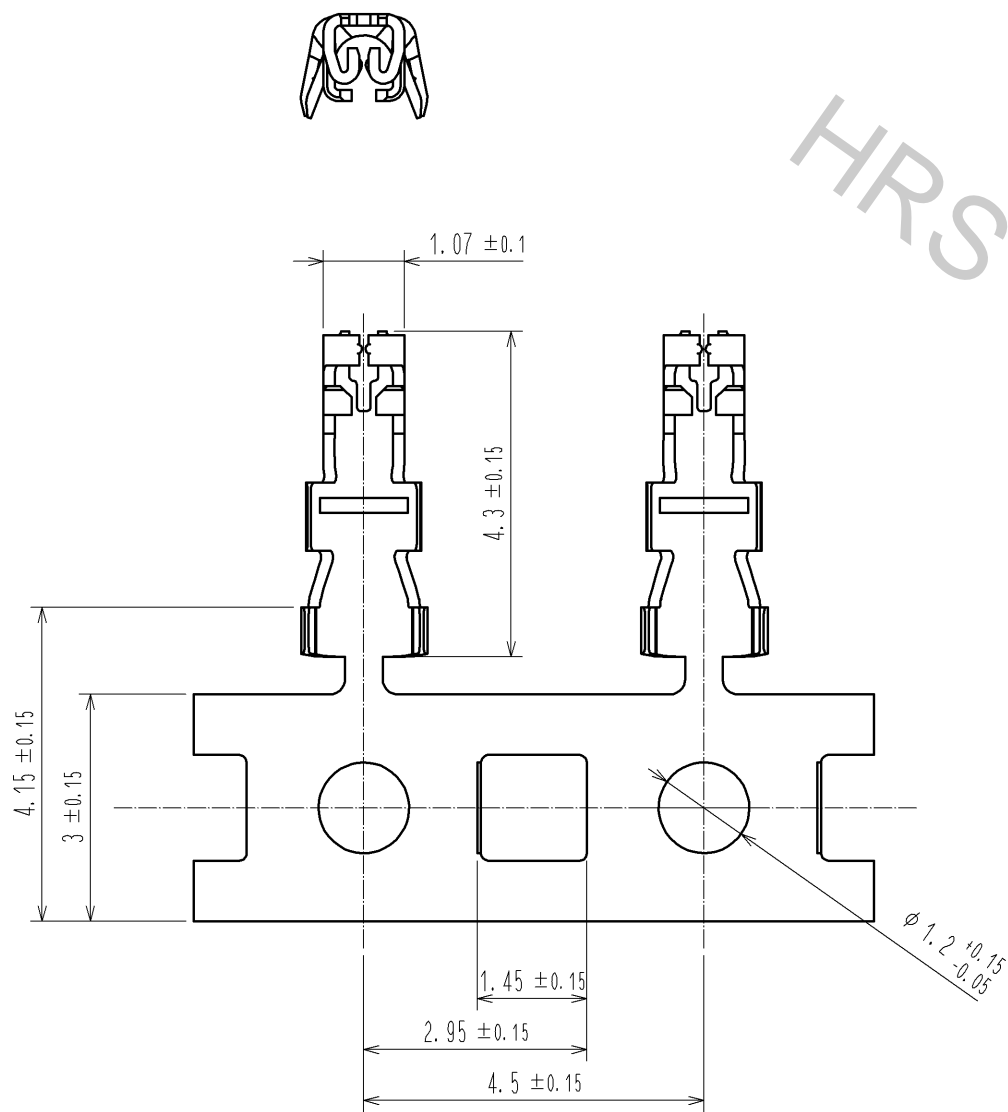

2 STYLE AND DIMENSION OF BOX

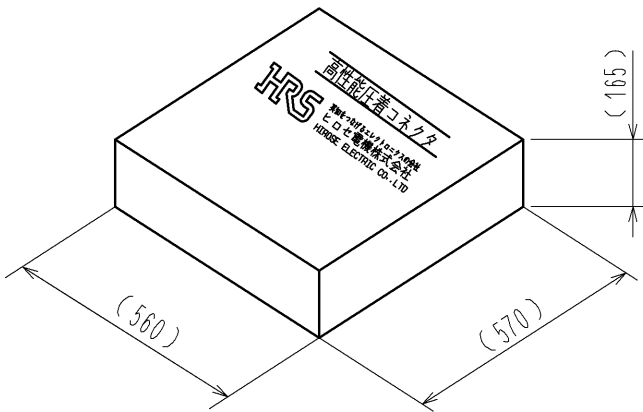


2 STYLE AND DIMENSION OF REEL

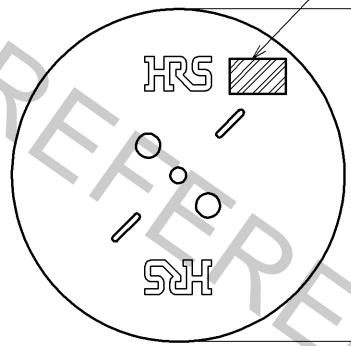

Detail of part No. Label

HRS		検査
品名コード	CL666-6003-2-00	
品名	DF65-2428SCF	
数量	18000	
仕様		
LOT No.		
継ぎ目		
Section		Inspection
Lot No.		
Specification		
Quantity		
Part No.		
Code No.		

- NOTE 1. 1RL:18000 CONTACTS.
2. STYLE OF REEL AND BOX SHOWS IN FIGURE.
3. A MAXIMUM OF 5 REELS ARE PACKED UP IN ONE BOX.
4. PLEASE BE SURE TO CHECK THE FORM OF CRIMPING USING A CABLE. WHEN YOU ADJUST APPLICATOR.

						1		COPPER ALLOY		SURFACE:TIN PLATING 1μmMIN	
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS		
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED	DATE
 HIROSE ELECTRIC CO. , LTD.			APPROVED : KI. AKIYAMA		13. 08. 22	DRAWING NO.	EDC3-348409-00				
			CHECED : OM. MIYAMOTO		13. 08. 21	PART NO.	DF65-2428SCF				
			DESIGNED : TT. OHSAKO		13. 08. 21	CODE NO.	CL666-6003-2-00				
			DRAWN : TT. OHSAKO		13. 08. 21		1/1				