



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---




7	8
---	---

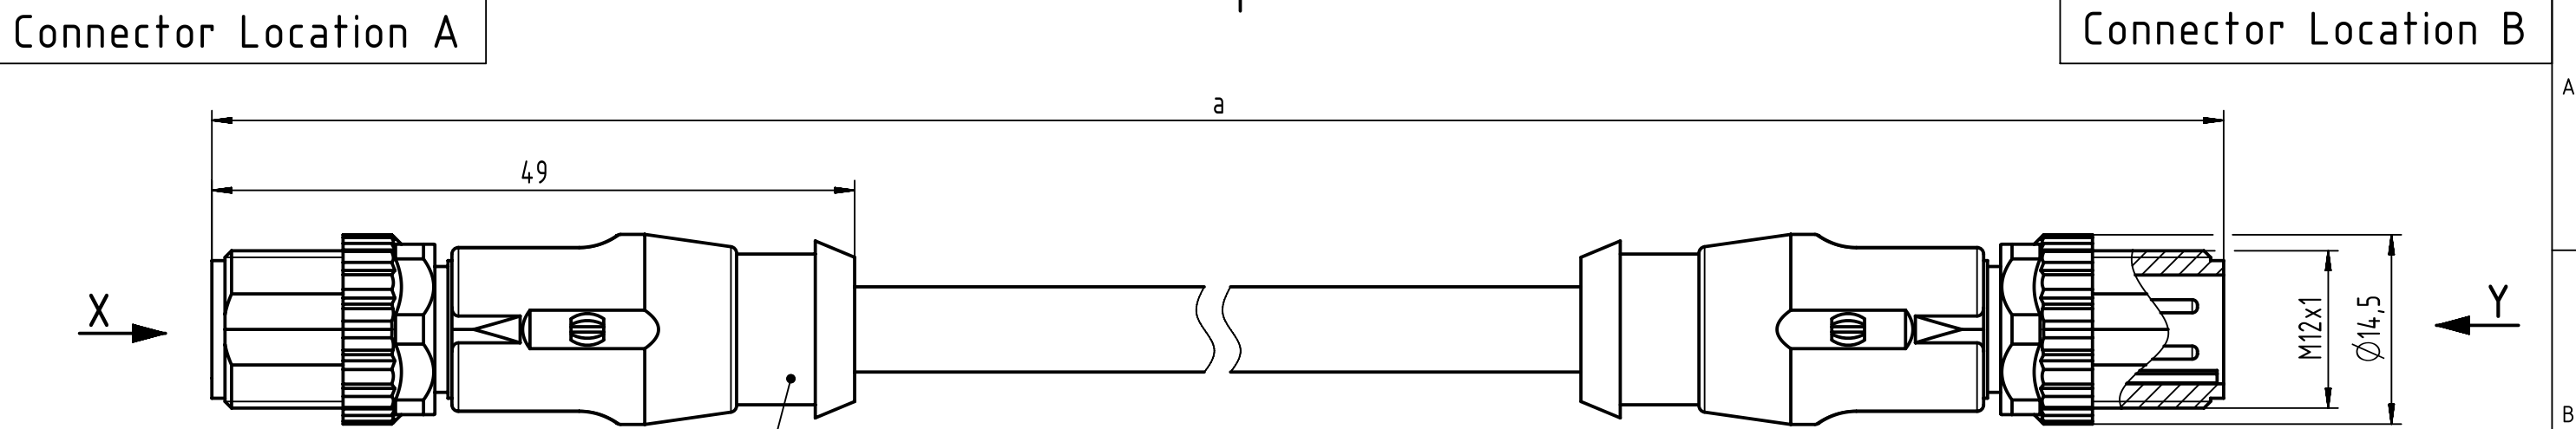

M12 D-coded 4-pole, straight overmolded male connector /

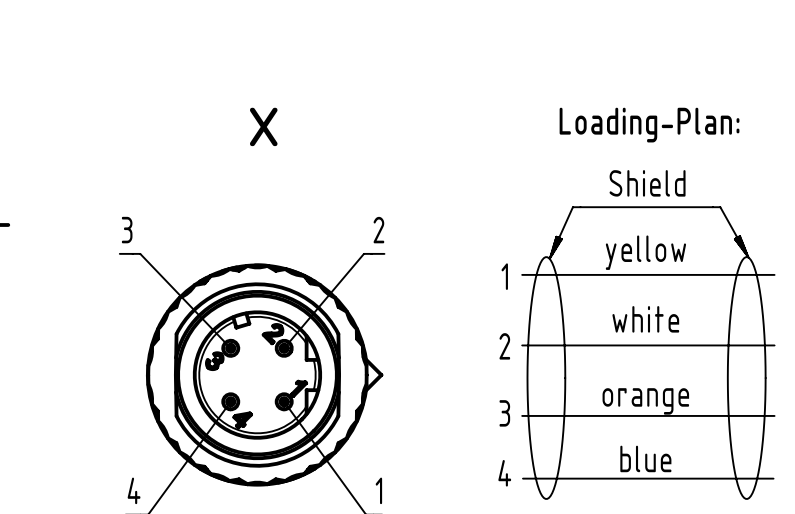

Loading-Plan:

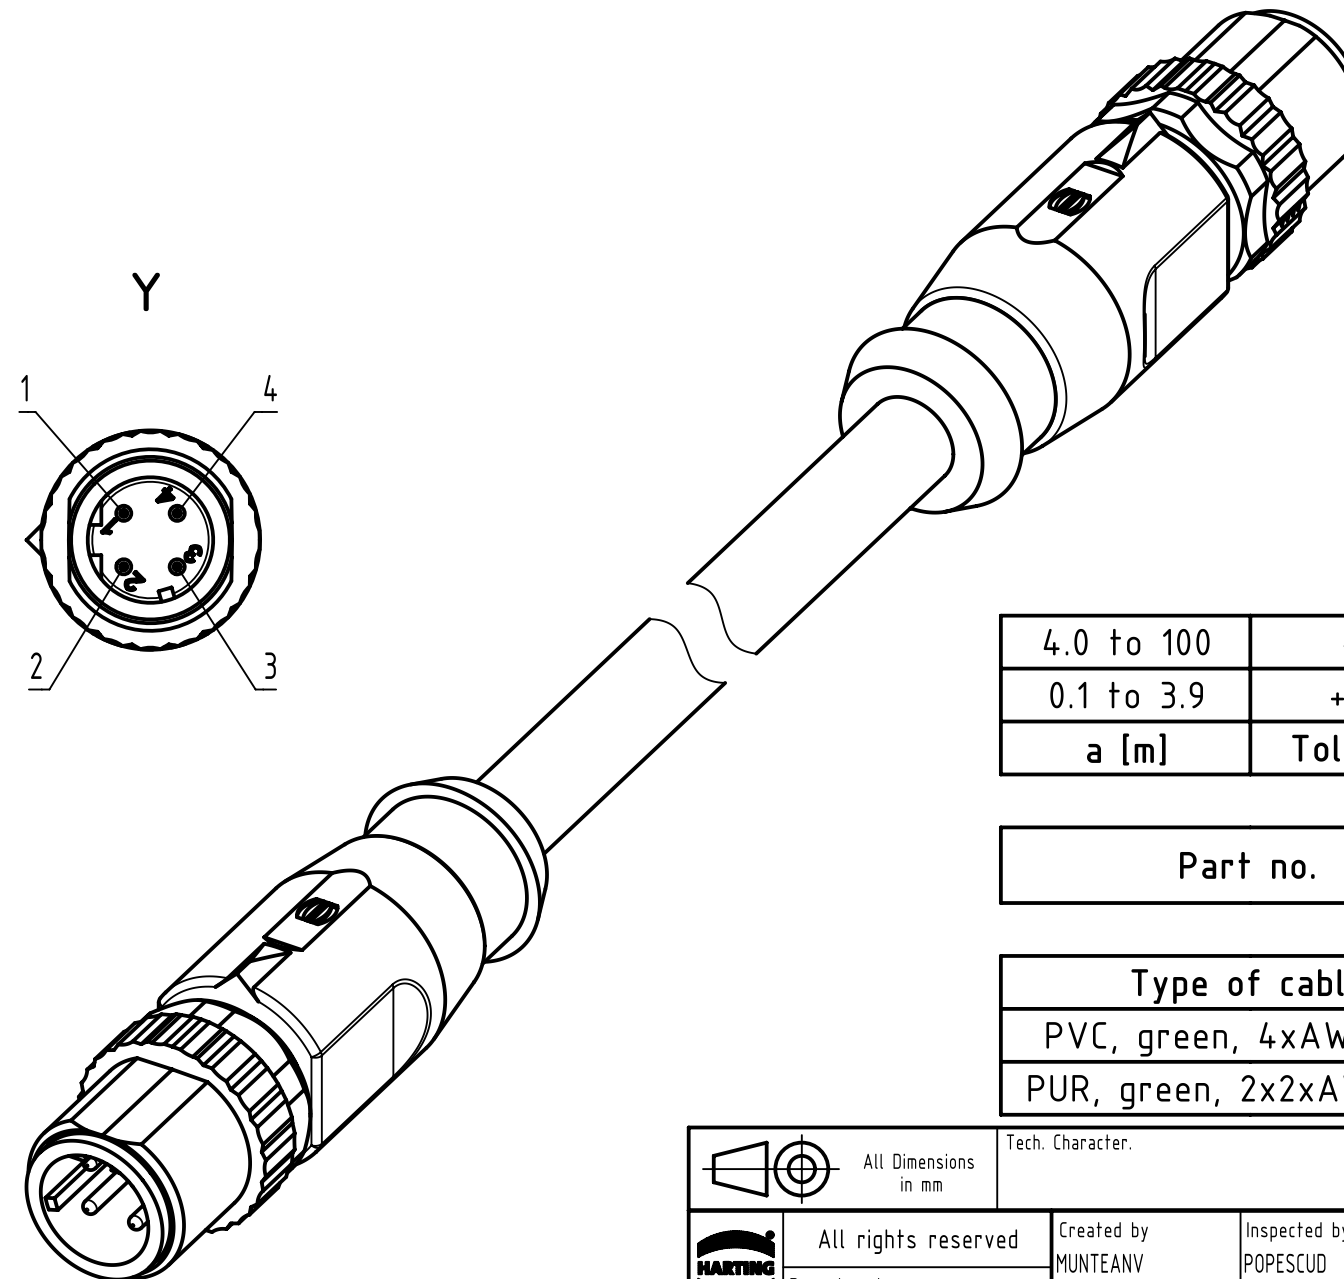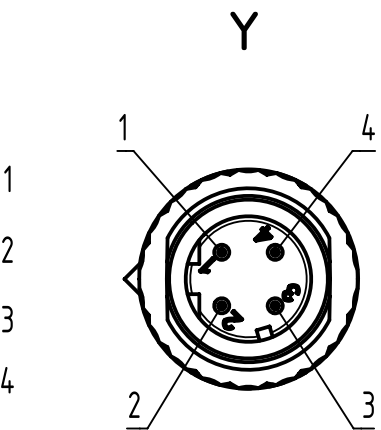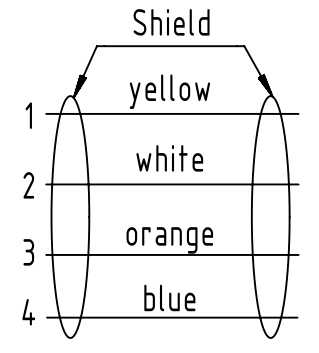



length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	<u>XXX</u>

4.0 to 100	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213492924-XXXX
----------	----------------

Type of cable	XX
PVC, green, 4xAWG22/7	XX=05
PUR, green, 2x2xAWG22/7	XX=77

- Protection level: IP 65/67
- Temperature range: -30°C ... +70°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing 2016-09-06	
		All rights reserved		Created by MUNTEANV		Inspected by POPESCU		Standardisation AVRAM	
Department HCS - RO						Date 2016-10-18		State Final Release	
HARTING Customised Solutions D-32427 Minden				Title M12 D-coded Cable Assembly				Doc-Key / ECM-Nr. 100588528/UGD/000/C 500000110313	
		Type TB		Number 213492924XXXXX				Rev. C	
								Page 1/1	