



## Product Change Notification / SYST-03JMUX560

---

**Date:**

04-Sep-2020

**Product Category:**

Linear Regulators

**PCN Type:**

Document Change

**Notification Subject:**

Data Sheet - MIC94310 Data Sheet

**Affected CPNs:**

[SYST-03JMUX560\\_Affected\\_CPN\\_09042020.pdf](#)

[SYST-03JMUX560\\_Affected\\_CPN\\_09042020.csv](#)

**Notification Text:**

SYST-03JMUX560

Microchip has released a new Product Documents for the MIC94310 Data Sheet of devices. If you are using one of these devices please read the document located at [MIC94310 Data Sheet](#).

**Notification Status:** Final

**Description of Change:** Added 0.88 mm × 0.88 mm 4-Ball WLCSP package.

**Impacts to Data Sheet:** None

**Reason for Change:** To Improve Productivity

**Change Implementation Status:** Complete

**Date Document Changes Effective:** 04 Sep 2020

**NOTE:** Please be advised that this is a change to the document only the product has not been changed.

**Markings to Distinguish Revised from Unrevised Devices:** N/A

## Attachments:

[MIC94310 Data Sheet](#)

Please contact your local [Microchip sales office](#) with questions or concerns regarding this notification.

## Terms and Conditions:

If you wish to receive Microchip PCNs via email please register for our PCN email service at our [PCN home page](#) select register then fill in the required fields. You will find instructions about registering for Microchips PCN email service in the [PCN FAQ](#) section.

If you wish to change your PCN profile, including opt out, please go to the [PCN home page](#) select login and sign into your myMicrochip account. Select a profile option from the left navigation bar and make the applicable selections.

Affected Catalog Part Numbers (CPN)

MIC94310-4YM5-T5  
MIC94310-4YM5-TR  
MIC94310-4YMT-T5  
MIC94310-4YMT-TR  
MIC94310-DYMT-T5  
MIC94310-DYMT-TR  
MIC94310-FYCS-TR  
MIC94310-FYMT-T5  
MIC94310-FYMT-TR  
MIC94310-GYM5-T5  
MIC94310-GYM5-TR  
MIC94310-GYMT-T5  
MIC94310-GYMT-TR  
MIC94310-JYCS-TR  
MIC94310-JYMT-T5  
MIC94310-JYMT-TR  
MIC94310-LYMT-T5  
MIC94310-LYMT-TR  
MIC94310-MYM5-T5  
MIC94310-MYM5-TR  
MIC94310-MYMT-T5  
MIC94310-MYMT-TR  
MIC94310-NYMT-T5  
MIC94310-NYMT-TR  
MIC94310-PYCS-TR  
MIC94310-PYM5-T5  
MIC94310-PYM5-TR  
MIC94310-PYMT-T5  
MIC94310-PYMT-TR  
MIC94310-SYCS-TR  
MIC94310-SYM5-T5  
MIC94310-SYM5-TR  
MIC94310-SYMT-T5  
MIC94310-SYMT-TR

## 200 mA LDO with Ripple Blocker™ Technology

### Features

- 1.8V to 3.6V Input Voltage Range
- Active Noise Rejection Over a Wide Frequency Band: >50 dB from 10 Hz to 10 MHz at 200 mA Load
- Rated to 200 mA Output Current
- Fixed Output Voltages
- Current-Limit and Thermal-Limit Protected
- 1.2 mm x 1.6 mm 4-Pin TDFN
- 5-Pin SOT-23
- Ultra-Small 0.88 mm x 0.88 mm WLCSP
- Logic-Controlled Enable Pin
- -40°C to +125°C Junction Temperature Range

### Applications

- Smartphones/Smart Books
- Tablet PC/Notebooks and Webcams
- Digital Still and Video Cameras
- Global Positioning Systems
- Mobile Computing
- Automotive and Industrial Applications




### General Description

The MIC94310 Ripple Blocker™ is a monolithic integrated circuit that provides low-frequency ripple attenuation (switching noise rejection) to a regulated output voltage. This is important for applications where a DC/DC switching converter is required to lower or raise a battery voltage, but where switching noise cannot be tolerated by sensitive downstream circuits such as in RF applications. The MIC94310 maintains high power supply ripple rejection (PSRR) with input voltages operating near the output voltage level to improve overall system efficiency. A low-voltage logic enable pin facilitates ON/OFF control at typical GPIO voltage levels.

The MIC94310 operates from an input voltage of 1.8V to 3.6V.


Packaged in a 4-pin 1.2 mm × 1.6 mm TDFN, a 5-pin SOT-23, or a 0.88 mm × 0.88 mm 4-Ball WLCSP, the MIC94310 has a junction operating temperature range of -40°C to +125°C.

### Package Types

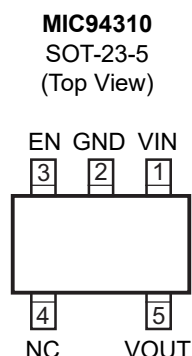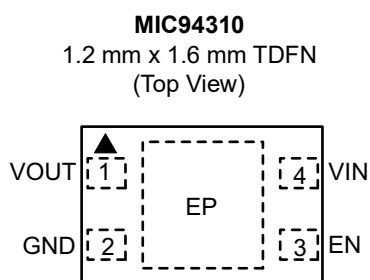


# MIC94310

## Typical Application Circuit

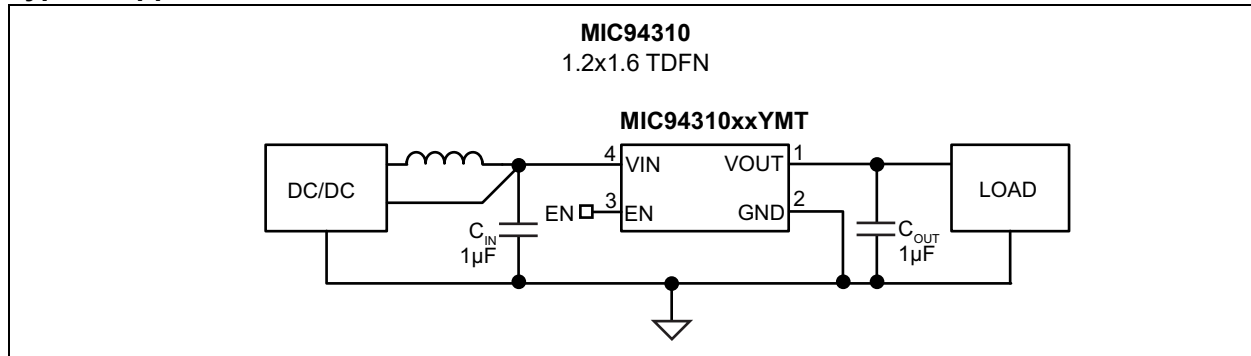

## Functional Block Diagram

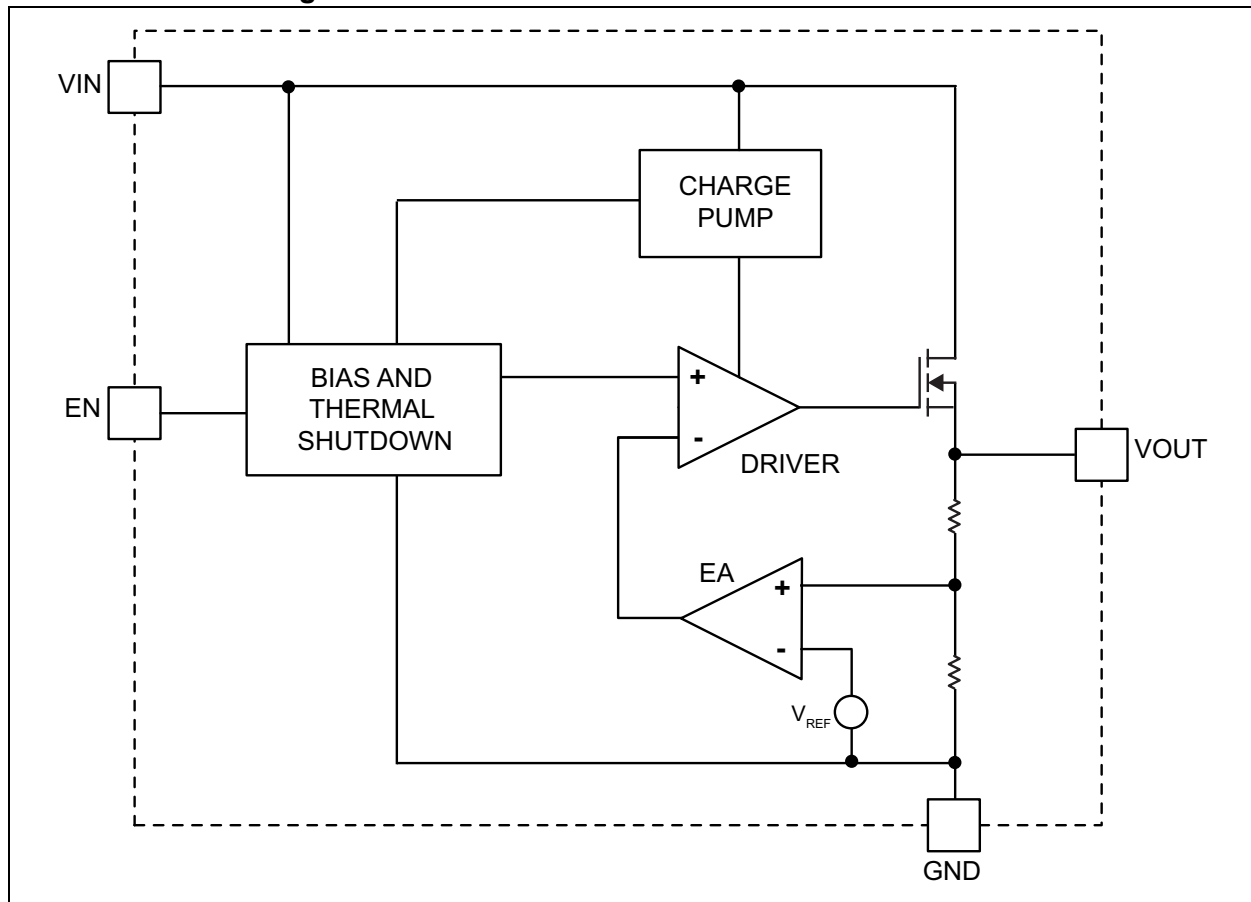

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

|                           |                                 |
|---------------------------|---------------------------------|
| Input Voltage, $V_{IN}$   | –0.3V to +4.0V                  |
| Output Voltage, $V_{OUT}$ | –0.3V to $V_{IN}+0.3V$ or +4.0V |
| Enable Voltage, $V_{EN}$  | –0.3V to $V_{IN}+0.3V$ or +4.0V |
| ESD Rating (Note 1)       | 3 kV                            |

### Operating Ratings ††

|                          |                |
|--------------------------|----------------|
| Supply Voltage, $V_{IN}$ | +1.8V to +3.6V |
| Enable Voltage, $V_{EN}$ | 0V to $V_{IN}$ |

† Notice: Exceeding the “Absolute Maximum Ratings †” may damage the device.

†† Notice: The device is not guaranteed to function outside its operating ratings.

**Note 1:** Devices are ESD-sensitive. Handling precautions are recommended. Human body model, 1.5 k $\Omega$  in series with 100 pF.

## ELECTRICAL CHARACTERISTICS (Note 1)

**Electrical Characteristics:** Unless otherwise indicated,  $V_{IN} = V_{EN} = V_{OUT} + 500$  mV ( $V_{IN} = V_{EN} = 3.6V$  for  $V_{OUT} \geq 3.1V$ );  $I_{OUT} = 1$  mA;  $C_{OUT} = 1$   $\mu$ F (YMT),  $C_{OUT} = 10$   $\mu$ F (YM5);  $T_A = 25^\circ C$ , **bold** values indicate  $-40^\circ C \leq T_J \leq +125^\circ C$ .

| Parameters                | Sym.                           | Min.       | Typ.    | Max.       | Units         | Conditions   |
|---------------------------|--------------------------------|------------|---------|------------|---------------|--|
| Input Voltage             | $V_{IN}$                       | <b>1.8</b> | —       | <b>3.6</b> | V             | —  |
| Output Voltage Accuracy   | $V_{OUT}$                      | <b>–3</b>  | $\pm 1$ | <b>+3</b>  | %             | Variation from nominal $V_{OUT}$                       |
| Dropout Voltage           | $V_{DO}$                       | —          | 20      | <b>50</b>  | mV            | $V_{IN}$ to $V_{OUT}$ dropout at 100 mA output current |
|                           |                                | —          | 40      | <b>100</b> | mV            | $V_{IN}$ to $V_{OUT}$ dropout at 200 mA output current |
| Load Regulation           | $\Delta V_{OUT}$               | —          | 4       | —          | mV            | $I_{OUT} = 1$ mA to 100 mA                             |
| Line Regulation           | $\Delta V_{OUT}/\Delta V_{IN}$ | —          | 0.01    | <b>0.5</b> | %             | $V_{IN} = V_{OUT} + 500$ mV to 3.6V                    |
| Ground Current            | $I_{GND}$                      | —          | 170     | 250        | $\mu$ A       | No load to full load                                   |
| Shutdown Current          | $I_{SHDN}$                     | —          | 0.2     | 5          | $\mu$ A       | $V_{EN} = 0V$  |
| $V_{IN}$ Ripple Rejection | PSRR                           | —          | 85      | —          | dB            | $f = 100$ Hz, $I_{OUT} = 100$ mA                       |
|                           |                                | —          | 68      | —          | dB            | $f = 100$ kHz, $I_{OUT} = 100$ mA                      |
|                           |                                | —          | 57      | —          | dB            | $f = 1$ MHz, $I_{OUT} = 100$ mA                        |
|                           |                                | —          | 50      | —          | dB            | $f = 10$ MHz, $I_{OUT} = 100$ mA                       |
| Current Limit             | $I_{LIM}$                      | <b>250</b> | 400     | 700        | mA            | $V_{OUT} = 0V$   |
| Total Output Noise        | $e_{no}$                       | —          | 83      | —          | $\mu V_{RMS}$ | $f = 10$ Hz to 100 kHz                                 |
| Turn-on Time              | $t_{ON}$                       | —          | 70      | —          | $\mu$ s       | —  |
| <b>Enable</b>             |                                |            |         |            |               |  |
| Input Logic Low Level     | $V_{EN\_LOW}$                  | —          | —       | <b>0.4</b> | V             | —  |
| Input Logic High Level    | $V_{EN\_HIGH}$                 | <b>1.0</b> | —       | —          | V             | —  |
| Enable Input Current      | $I_{EN}$                       | —          | 0.01    | 1          | $\mu$ A       | —  |

**Note 1:** Specification for packaged product only.


## TEMPERATURE SPECIFICATIONS

| Parameters                         | Sym.          | Min. | Typ. | Max. | Units | Conditions         |
|------------------------------------|---------------|------|------|------|-------|--------------------|
| <b>Temperature Ranges</b>          |               |      |      |      |       |                    |
| Junction Operating Temperature     | $T_J$         | -40  | —    | +125 | °C    | —                  |
| Lead Temperature                   | —             | —    | —    | +260 | °C    | Soldering, 10 sec. |
| Storage Temperature Range          | $T_S$         | -65  | —    | +150 | °C    | —                  |
| <b>Package Thermal Resistances</b> |               |      |      |      |       |                    |
| Thermal Resistance, TDFN           | $\theta_{JA}$ | —    | 173  | —    | °C/W  | —                  |
| Thermal Resistance, SOT-23-5Ld     | $\theta_{JA}$ | —    | 120  | —    | °C/W  | —                  |
| Thermal Resistance WLCSP           | $\theta_{JA}$ | —    | 250  | —    | °C/W  | —                  |


**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e.,  $T_A$ ,  $T_J$ ,  $\theta_{JA}$ ). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.

## 2.0 TYPICAL PERFORMANCE CURVES


**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

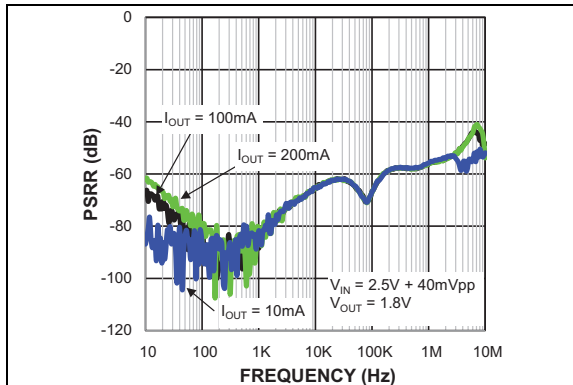


**FIGURE 2-1:** PSRR  $C_{OUT} = 0.47 \mu F$ .

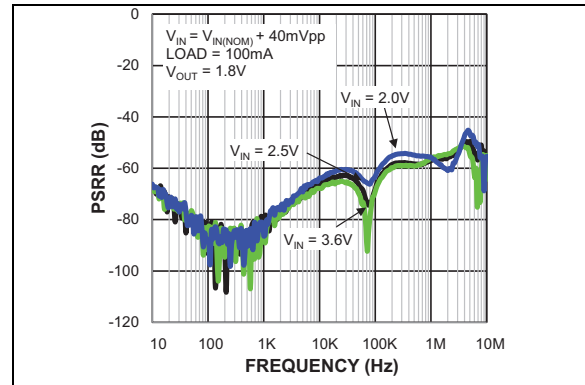


**FIGURE 2-4:** PSRR  $C_{OUT} = 1 \mu F$ .

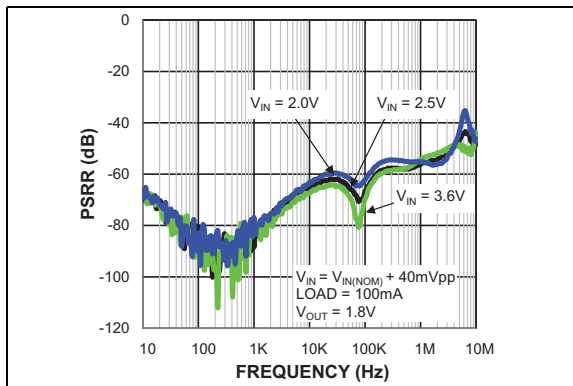


**FIGURE 2-2:** PSRR  $C_{OUT} = 0.47 \mu F$ .

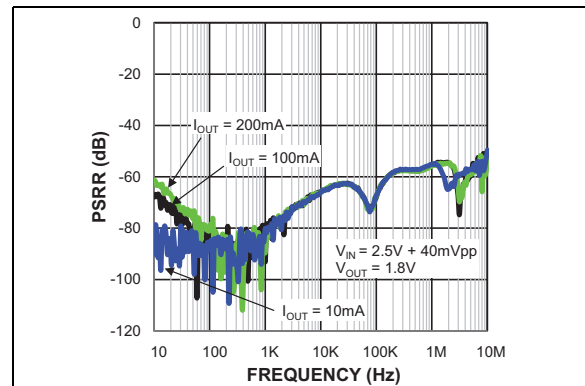

**FIGURE 2-5:** PSRR  $C_{OUT} = 2.2 \mu F$ .

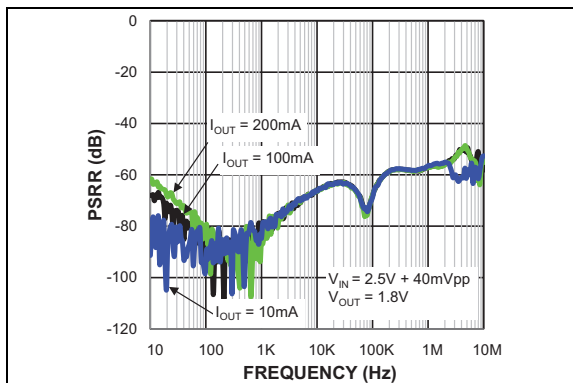


**FIGURE 2-3:** PSRR  $C_{OUT} = 1 \mu F$ .

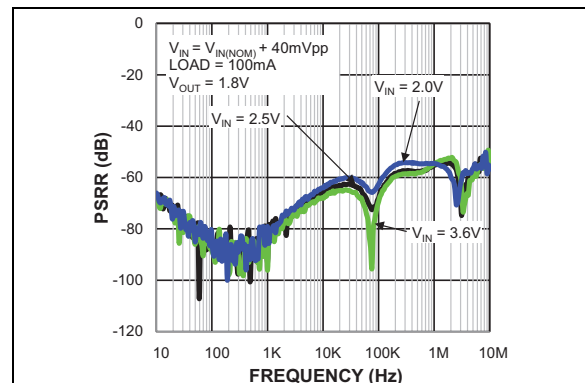


**FIGURE 2-6:** PSRR  $C_{OUT} = 2.2 \mu F$ .




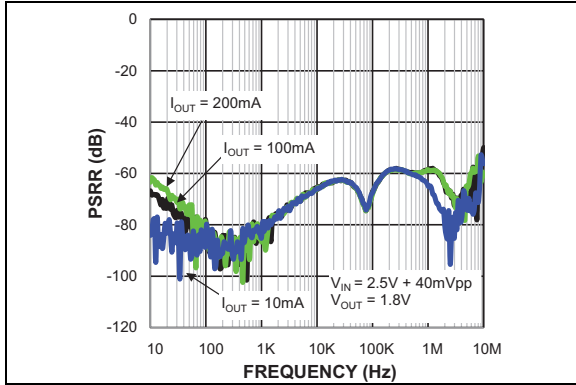


**FIGURE 2-7:** PSRR  $C_{OUT} = 4.7 \mu F$ .

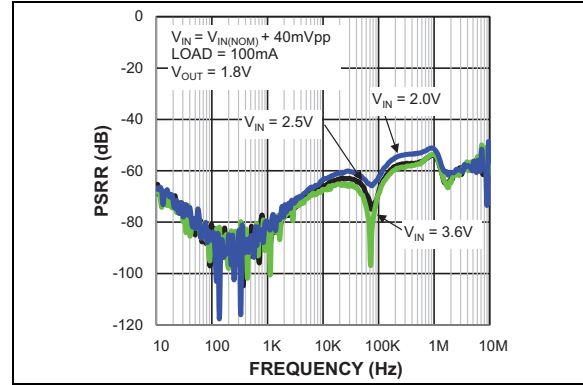


**FIGURE 2-10:** PSRR  $C_{OUT} = 10 \mu F$ .

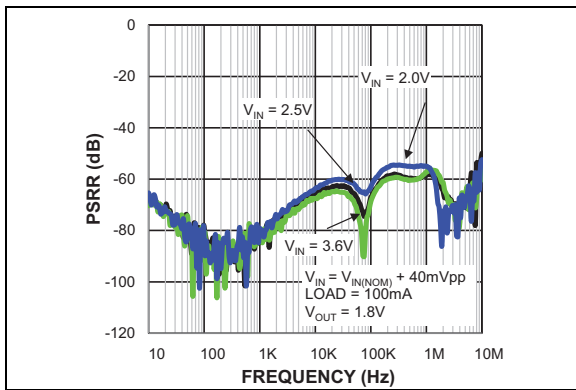


**FIGURE 2-8:** PSRR  $C_{OUT} = 4.7 \mu F$ .

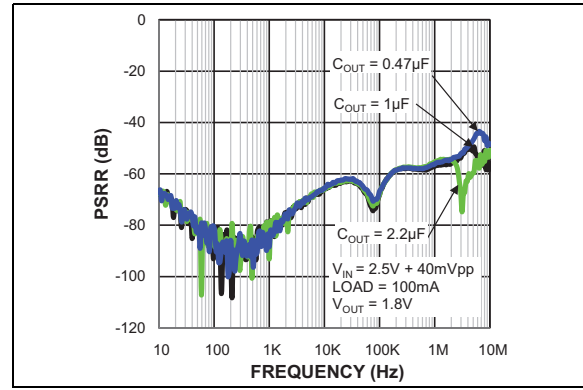


**FIGURE 2-11:** PSRR (Varying  $C_{OUT}$ ).

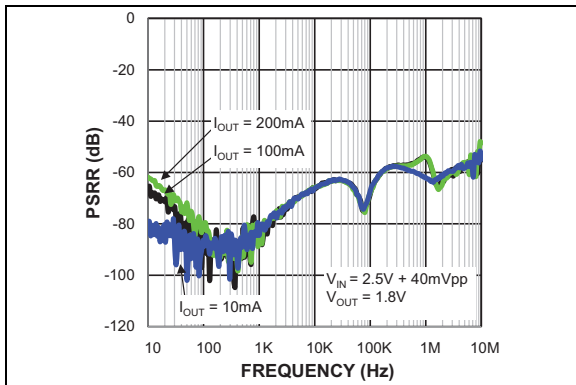


**FIGURE 2-9:** PSRR  $C_{OUT} = 10 \mu F$ .

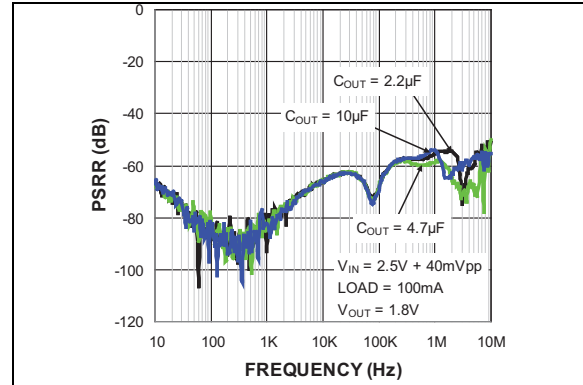


**FIGURE 2-12:** PSRR (Varying  $C_{OUT}$ ).

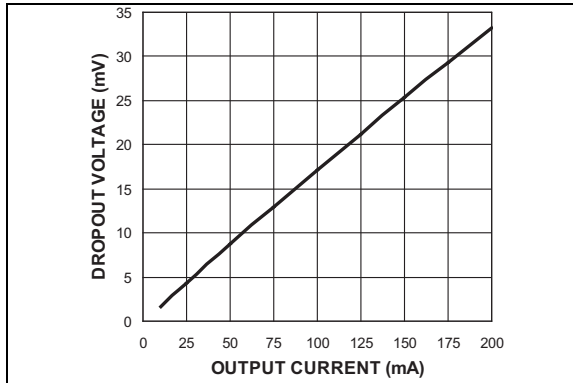


**FIGURE 2-13:** Drop Voltage vs. Output Current.

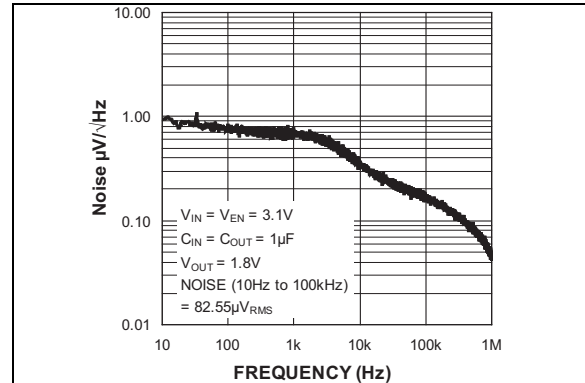


**FIGURE 2-16:** Output Noise Spectral Density.

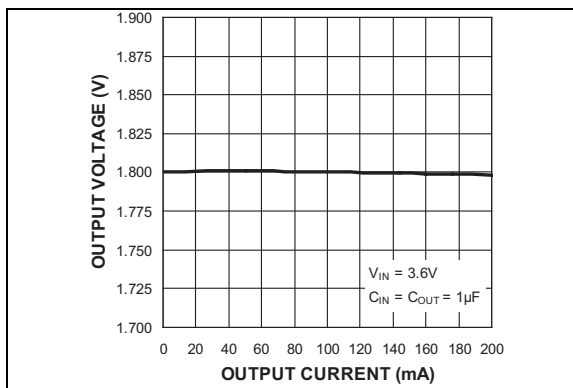


**FIGURE 2-14:** Output Voltage vs. Output Current.

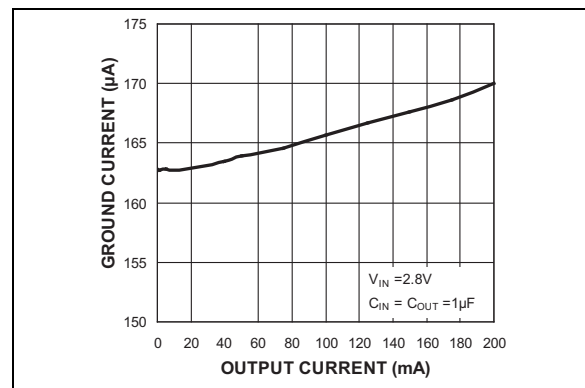

**FIGURE 2-17:** Ground Current vs. Output Current.

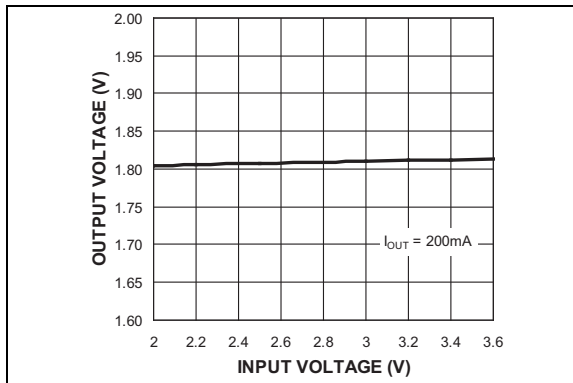

**FIGURE 2-15:** Output Voltage vs. Input Voltage.

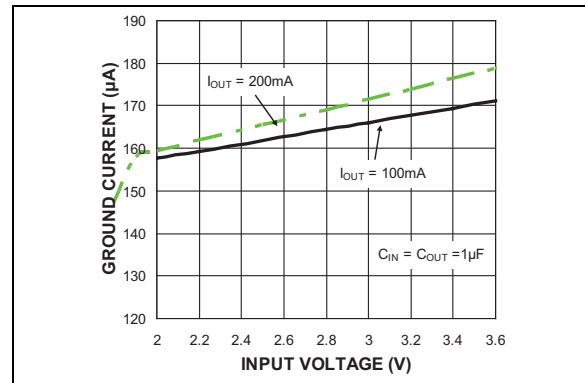

**FIGURE 2-18:** Ground Current vs. Input Voltage.

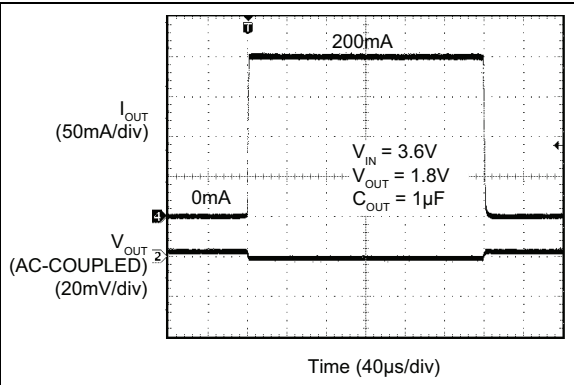


FIGURE 2-19: Load Transient (0 mA to 200 mA).

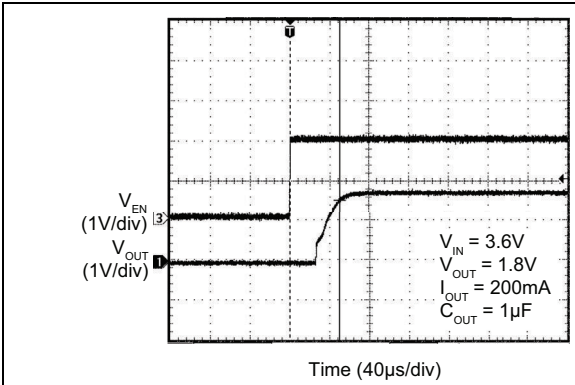


FIGURE 2-21: Enable Turn-On.

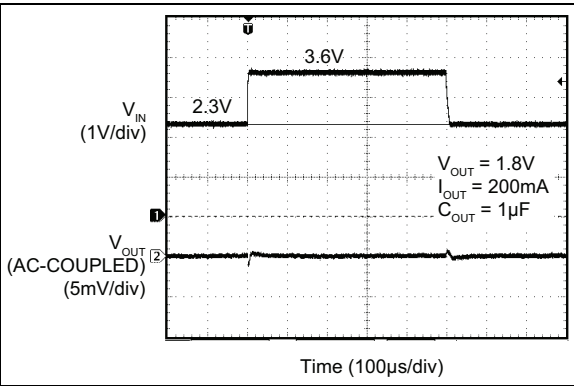


FIGURE 2-20: Line Transient (2.6V to 3.6V).

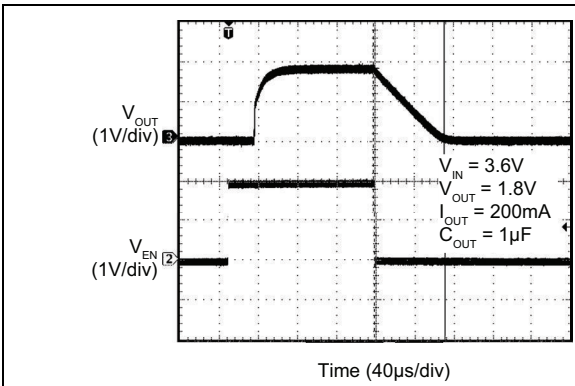


FIGURE 2-22: Enable Turn-Off.

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

| MIC94310<br>TDFN | MIC94310<br>SOT-23 | MIC94310<br>WLCSP | Symbol    | Description   |
|------------------|--------------------|-------------------|-----------|---|
| 1                | 5                  | A2                | $V_{OUT}$ | Power Switch Output   |
| 2                | 2                  | B2                | GND       | Ground  |
| 3                | 3                  | B1                | EN        | Enable Input<br>A logic HIGH signal on this pin enables the part. Logic LOW disables the part. Do not leave floating. |
| 4                | 1                  | A1                | $V_{IN}$  | Power switch input and chip supply  |
| —                | 4                  | —                 | NC        | No Connect, not internally connected  |
| EP               | —                  | —                 | EPAD      | Exposed Heatsink Pad<br>Connect to ground for best thermal performance.   |

## 4.0 APPLICATION INFORMATION

The MIC94310 is a very-high PSRR, fixed-output, 200 mA LDO utilizing Ripple Blocker technology. The MIC94310 is fully protected from damage due to fault conditions, offering linear current limiting and thermal shutdown.

### 4.1 Input Capacitor

The MIC94310 is a high-performance, high-bandwidth device. An input capacitor of 0.47  $\mu\text{F}$  is required from the input to ground to provide stability. Low-ESR ceramic capacitors provide optimal performance at a minimum of space. Additional high-frequency capacitors, such as small-valued NPO dielectric-type capacitors, help filter out high-frequency noise and are good practice in any RF-based circuit. X5R or X7R dielectrics are recommended for the input capacitor. Y5V dielectrics lose most of their capacitance over temperature and are therefore, not recommended.

### 4.2 Output Capacitance

In order to maintain stability, the MIC94310 requires an output capacitor of 0.47  $\mu\text{F}$  or greater for the Thin DFN package and 10  $\mu\text{F}$  or greater for the SOT-23 package. For optimal ripple rejection performance, a 1  $\mu\text{F}$  capacitor is recommended for the Thin DFN package. A 10  $\mu\text{F}$  capacitor is recommended for the SOT-23 package. The design is optimized for use with low-ESR ceramic chip capacitors. High-ESR capacitors are not recommended because they may cause high-frequency oscillation. The output capacitor can be increased, but performance has been optimized for a 1  $\mu\text{F}$  ceramic output capacitor and does not improve significantly with larger capacitance.

X7R/X5R dielectric type ceramic capacitors are recommended because of their temperature performance. X7R type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change their value by as much as 50% and 60%, respectively, over their operating temperature ranges. To use a ceramic chip capacitor with the Y5V dielectric, the value must be much higher than an X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

### 4.3 No Load Stability

The MIC94310 will remain stable and in regulation with no load. This is especially important in CMOS RAM keep-alive applications.

### 4.4 Enable/Shutdown

Forcing the enable (EN) pin low disables the MIC94310 and sends it into a "zero" off mode current state. In this state, current consumed by the MIC94310 goes nearly to zero. Forcing EN high enables the output voltage. The EN pin uses CMOS technology and cannot be left floating as it could cause an indeterminate state on the output.

### 4.5 Thermal Considerations

The MIC94310 is designed to provide 200 mA of continuous current in a very small package. Maximum ambient operating temperature can be calculated based on the output current and the voltage drop across the part. For example if the input voltage is 2.5V, the output voltage is 1.8V, and the output current equals 200 mA. The actual power dissipation of the Ripple Blocker can be determined using [Equation 4-1](#):

#### EQUATION 4-1:

$$P_D = (V_{IN} - V_{OUT1})I_{OUT} + V_{IN}I_{GND}$$

Because this device is CMOS and the ground current is typically <170  $\mu\text{A}$  over the load range, the power dissipation contributed by the ground current is <1% and can be ignored for the calculation shown in [Equation 4-2](#) and [Equation 4-3](#).

#### EQUATION 4-2:

$$P_D = (2.5V - 1.8V) \times 200 \text{ mA}$$

#### EQUATION 4-3:

$$P_D = 0.14W$$

To determine the maximum ambient operating temperature of the package, use the junction-to-ambient thermal resistance of the device and the [Equation 4-4](#):

#### EQUATION 4-4:

$$P_{D(MAX)} = \left( \frac{T_{J(MAX)} - T_A}{\theta_{JA}} \right)$$

$T_{J(MAX)} = 125^\circ\text{C}$ , the maximum junction temperature of the die,  $\theta_{JA}$  thermal resistance =  $173^\circ\text{C/W}$  for the Thin DFN package.

Substituting  $P_D$  for  $P_{D(MAX)}$  and solving for the ambient operating temperature will give the maximum operating conditions for the regulator circuit.

For proper operation, the maximum power dissipation must not be exceeded.

For example, when operating the MIC94310-GYMT at an input voltage of 2.5V and 200 mA load with a minimum footprint layout, the maximum ambient operating temperature ( $T_A$ ) can be determined as follows:

**EQUATION 4-5:**

$$0.14 W = (125^{\circ}C - T_A) / (173^{\circ}C/W)$$

**EQUATION 4-6:**


$$T_A = 101^{\circ}C$$

Therefore, the maximum ambient operating temperature allowed in a 1.2 mm × 1.6 mm Thin DFN package is 101°C.


## 5.0 PACKAGING INFORMATION

### 5.1 Package Marking Information


5-lead SOT-23\*




Example




4-lead TDFN\*




Example



4-ball WLCSP\*



Example



|                |  |  |
|----------------|--|--|
| <b>Legend:</b> | XX...X   | Product code or customer-specific information  |
|                | Y  | Year code (last digit of calendar year)  |
|                | YY   | Year code (last 2 digits of calendar year)   |
|                | WW   | Week code (week of January 1 is week '01')   |
|                | NNN  | Alphanumeric traceability code   |
|                | (e3)   | Pb-free JEDEC® designator for Matte Tin (Sn)   |
|                | *  | This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package. |
|                | •, ▲, ▼  | Pin one index is identified by a dot, delta up, or delta down (triangle mark).                                     |
| <b>Note:</b>   | In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo. |  |
|                | Underbar ( _ ) and/or Overbar ( ¯ ) symbol may not be to scale.  |  |


## 4-Lead 1.2 mm × 1.6 mm Thin DFN Package Outline and Recommended Land Pattern

### TITLE

4 LEAD TDFN 1.2x1.6mm PACKAGE OUTLINE & RECOMMENDED LAND PATTERN


DRAWING # TDFN1216-4LD-PL-1

UNIT MM




TOP VIEW

NOTE: 1, 2, 3

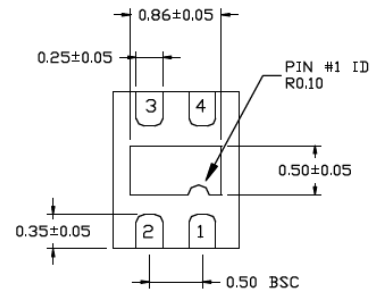


BOTTOM VIEW

NOTE: 1, 2, 3



SIDE VIEW

NOTE: 1, 2, 3

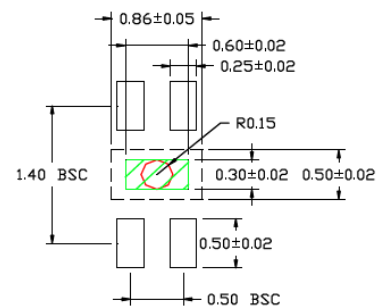

RECOMMENDED LAND PATTERN

NOTE: 4, 5

### NOTE:

1. MAX PACKAGE WARPAGE IS 0.05mm.
2. MAX ALLOWABLE BURR IS 0.076mm IN ALL DIRECTIONS.
3. PIN #1 IS ON TOP WILL BE LASER MARKED.
4. GREEN SHADED AREA INDICATES SOLDER STENCIL OPENING (OPTIONAL) FOR IMPROVED THERMAL PERFORMANCE. RECOMMENDED SIZE IS 0.60mm x 0.30mm.
5. RED CIRCLE REPRESENTS THERMAL VIA & SHOULD BE CONNECTED TO GND FOR MAX PERFORMANCE. RECOMMENDED DIAMETER IS 0.30mm - 0.35mm.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.




# MIC94310

## 5-Pin SOT-23 Package Outline and Recommended Land Pattern

### TITLE

5 LEAD SOT23 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

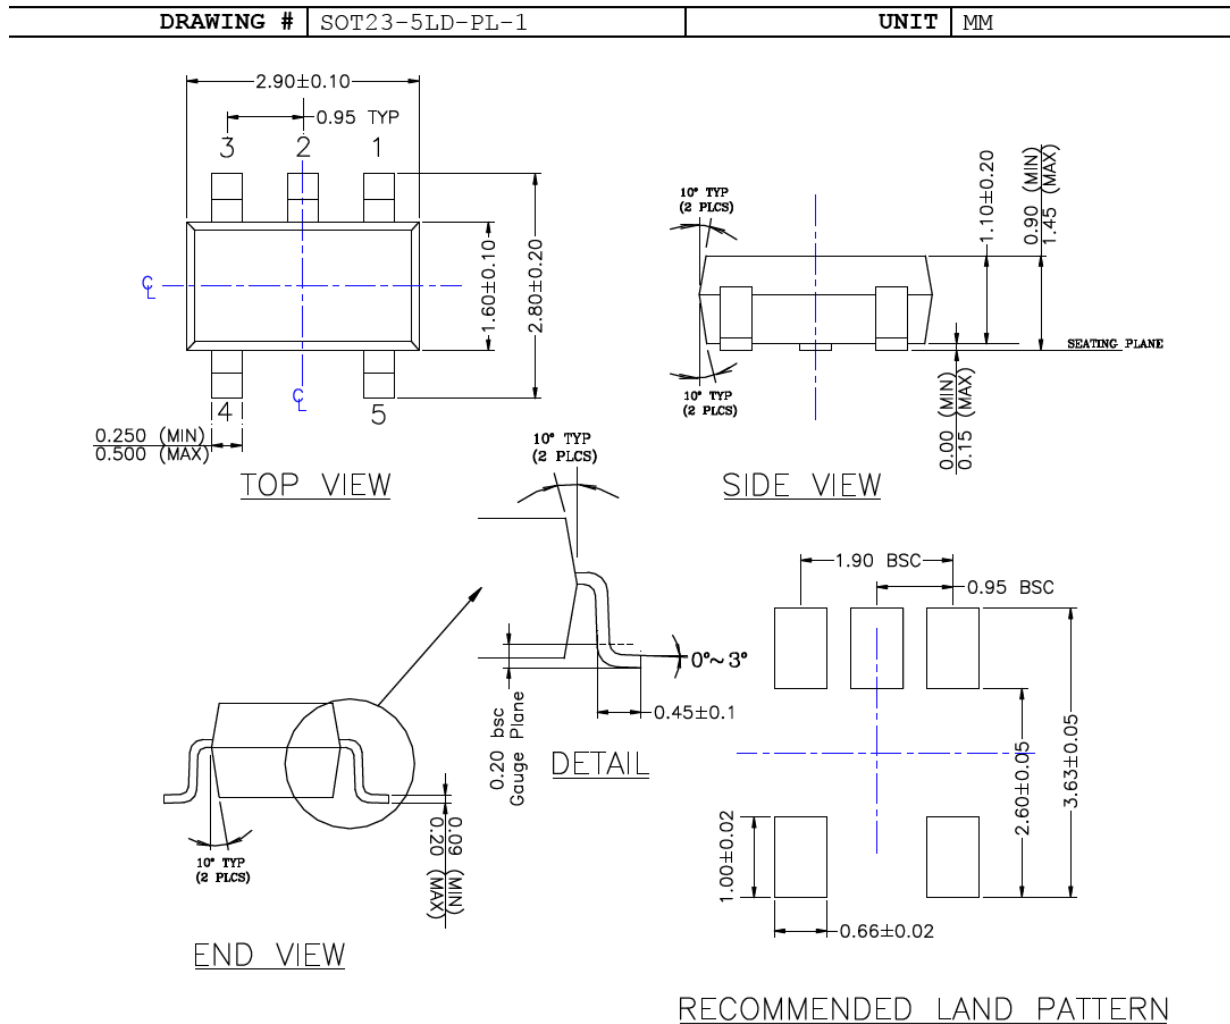

### NOTE:

1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & BURR.
2. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
3. DIMENSION AND TOLERANCE PER ANSI Y14.5M, 1982.
4. FOOT LENGTH MEASUREMENT BASED ON GAUGE PLANE METHOD.
5. DIE FACES UP FOR MOLD, AND FACES DOWN FOR TRIM/FORM.
6. ALL DIMENSIONS ARE IN MILLIMETERS.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.


## 4-Ball WLCSP 0.88 mm x 0.88 mm Package Outline and Recommended Land Pattern

### TITLE

4 BALL WLCSP 0.88x0.88mm PACKAGE OUTLINE & RECOMMENDED LAND PATTERN


DRAWING # WLCSP088088D-4BL-PL-9

UNIT MM




TOP VIEW

NOTE: 1,2




BOTTOM VIEW

NOTE: 1,2

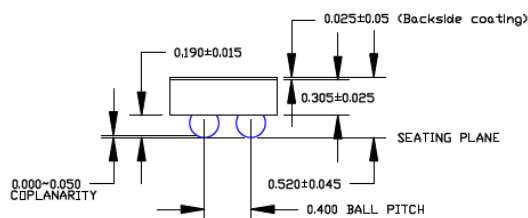

SIDE VIEW

NOTE: 1,2



RECOMMENDED LAND PATTERN

NOTE: 3,4

### NOTE:

1. MAX PACKAGE WARPAGE IS 0.05 MM
2. MAX ALLOWABLE BURR IS 0.076MM IN ALL DIRECTIONS
3. NON-SOLDERMASK DEFINED PADS ARE RECOMMENDED FOR BOARD LAYOUT
4. SHADED RED CIRCLES REPRESENT CONTACT PAD AREA. GREEN CIRCLES REPRESENT SOLDER MASK OPENING

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

# MIC94310

---

NOTES:

## APPENDIX A: REVISION HISTORY

### Revision B (September 2020)

- Added 0.88 mm × 0.88 mm 4-Ball WLCSP package.

### Revision A (October 2018)

- Converted Micrel document MIC94310 to Microchip data sheet template DS20006105A.
- Minor grammatical text changes throughout.

# MIC94310

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

| <u>PART NO.</u>           |  | <u>-X</u>  | <u>X</u>          | <u>XX</u> | <u>-XX</u> |
|---------------------------|--|--|-------------------|-----------|------------|
| Device                    |  | Output Voltage   | Temperature Range | Package   | Media Type |
| <b>Device:</b>            |  | MIC94310: 200 mA LDO with Ripple Blocker™ Technology   |                   |           |            |
| <b>Output Voltage:</b>    |  | 4 = 1.2V   |                   |           |            |
|                           |  | F = 1.5V   |                   |           |            |
|                           |  | G = 1.8V   |                   |           |            |
|                           |  | D = 1.85V  |                   |           |            |
|                           |  | J = 2.5V   |                   |           |            |
|                           |  | L = 2.7V   |                   |           |            |
|                           |  | M = 2.8V   |                   |           |            |
|                           |  | N = 2.85V  |                   |           |            |
|                           |  | P = 3.0V   |                   |           |            |
|                           |  | S = 3.3V   |                   |           |            |
| <b>Temperature Range:</b> |  | Y = -40°C to +85°C   |                   |           |            |
|                           |  | E = -40°C to +125°C  |                   |           |            |
| <b>Packages:</b>          |  | MT = 4-Lead 1.2 mm × 1.6 mm Thin DFN   |                   |           |            |
|                           |  | M5 = 5-Lead SOT-23   |                   |           |            |
|                           |  | CS = 4-Ball 0.88 mm × 0.88 mm WLCSP  |                   |           |            |
| <b>Media Type:</b>        |  | TR = 3,000/Reel (SOT-23)   |                   |           |            |
|                           |  | TR = 5,000/Reel (TDFN)   |                   |           |            |
|                           |  | TR = 3,000/Reel (WLCSP)  |                   |           |            |
|                           |  | T5 = 500/Reel  |                   |           |            |
| <b>Note 1:</b>            |  | Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option. |                   |           |            |
|                           |  | <b>Examples:</b>   |                   |           |            |
|                           |  | a) MIC94310-4YMT-T5: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead TDFN, 5,000/Reel  |                   |           |            |
|                           |  | b) MIC94310-4YMT-TR: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead TDFN, 5,000/Reel  |                   |           |            |
|                           |  | c) MIC94310-4YM5-T5: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead SOT-235,000/Reel  |                   |           |            |
|                           |  | d) MIC94310-4YM5-TR: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead SOT-23, 5,000/Reel  |                   |           |            |
|                           |  | e) MIC94310-4YMT-T5: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead TDFN, 5,000/Reel  |                   |           |            |
|                           |  | f) MIC94310-4YMT-TR: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead TDFN, 5,000/Reel  |                   |           |            |
|                           |  | g) MIC94310-4YM5-T5: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead SOT-23 5,000/Reel   |                   |           |            |
|                           |  | h) MIC94310-4YM5-TR: 200 mA LDO with Ripple Blocker™ Technology, 1.2V Output Voltage, -40°C to +85°C Temperature Range, 5-Lead SOT-23, 5,000/Reel  |                   |           |            |
|                           |  | i) MIC94310-4YCS-TR: 200 mA LDO with Ripple Blocker™ Technology, 1.2 Output Voltage -40°C to +125°C Extended Temperature Range, 4-Ball WLCSP 3,000/Reel  |                   |           |            |
|                           |  | j) MIC94310-GYCS-TR: 200 mA LDO with Ripple Blocker™ Technology, 1.8 Output Voltage -40°C to +125°C Extended Temperature Range, 4-Ball WLCSP 3,000/Reel  |                   |           |            |
|                           |  | k) MIC94310-JYCS-TR: 200 mA LDO with Ripple Blocker™ Technology, 2.5 Output Voltage -40°C to +125°C Extended Temperature Range, 4-Ball WLCSP 3,000/Reel  |                   |           |            |
|                           |  | l) MIC94310-MYCS-TR: 200 mA LDO with Ripple Blocker™ Technology, 2.8 Output Voltage -40°C to +125°C Extended Temperature Range, 4-Ball WLCSP 3,000/Reel  |                   |           |            |
|                           |  | m) MIC94310-PYCS-TR: 200 mA LDO with Ripple Blocker™ Technology, 0.0 Output Voltage -40°C to +125°C Extended Temperature Range, 4-Ball WLCSP 3,000/Reel  |                   |           |            |
|                           |  | n) MIC94310-SYCS-TR: 200 mA LDO with Ripple Blocker™ Technology, 3.3 Output Voltage -40°C to +125°C Extended Temperature Range, 4-Ball WLCSP 3,000/Reel  |                   |           |            |

# MIC94310

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

## Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeelQ, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzr, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2018-2020, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-6705-2



## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820