

TNC Male Connector Assembly



Electrical Characteristics:

Max. Operating Frequency	: 6 GHz
Connector Impedance	: 50Ω
Return Loss	: -35dB, 0 – 1 GHz -32dB, 1 – 3 GHz
Insertion Loss	: 0.1 √freq (GHz)

Mechanical:


Inner Attachment Method	: 360° Collet
Outer Attachment Method	: Compression
Connector Weight	: 1.565 oz. 44.4 g
Min. Connector Retention Tensile Force	: 890 N 200 lbs.
Min. Coupling Nut Torque	: 14 in.-lbs. 1.6 N-m
Hex Width	: 0.55" 14mm

Components:

Interface Type	: TNC, Male
Body & Hex Coupling Nut	: White Bronze (tri-metal)
Inner Contact	: Gold Plated Brass
Internal Post	: Tin Plated Brass
Compression Ring	: Brass
Clamp	: UHMWPE
Insulator	: Ultem® 1000
Gasket	: Silicone Rubber

Environmental:

Moisture Resistance Test	: MIL-STD-202F, Method 106F
Mechanical Shock Test	: MIL-STD-202F, Method 213B, Test Condition C
Corrosion Test	: MIL-STD-1344A, Method 1001.1, Test Condition A
Thermal Shock Test	: MIL-STD-202F, Method 107G, Test Condition A-1, Low Temp -55°C
Vibration Test	: IEC 68, PART 2-6
Operating Temp. Range	: -67°F to +185°F / -55°C to +85°C
Storage Temperature	: -67°F to +185°F / -55°C to +85°C
Immersion Test	: IEC 529:1989, IP68
Immersion Depth	: 12" 0.31m
Water Jetting Test	: IEC 529:1989, IP66

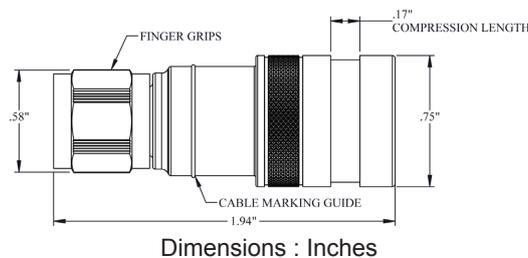

Part Number Table

Description	Part Number
TNC Male Connector Assembly, 50Ω for 400 Size Cable	MCRF-TM-400

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.