




FRONT VIEW

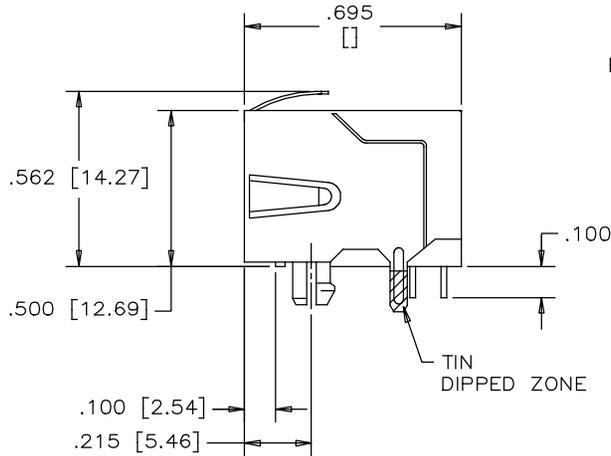

SIDE VIEW

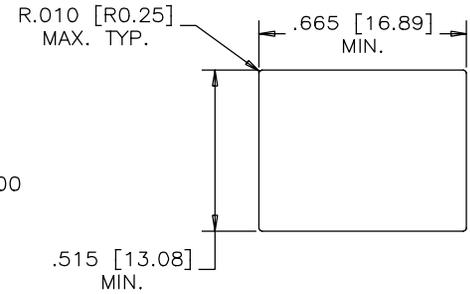

RECOMMENDED PANEL CUTOUT

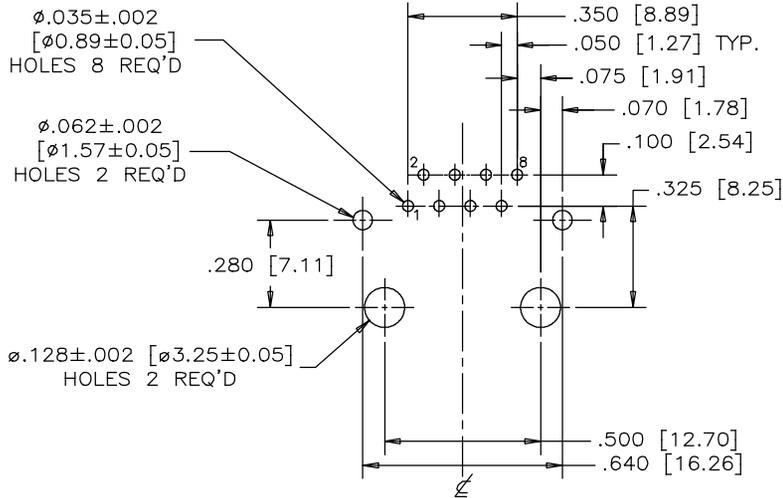

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
 $\phi .005 [0.13]$
 HOLE DIMENSIONS ARE BASIC

MATERIALS:

CONTACTS: PHOSPHOR BRONZE, SELECTIVELY PLATED WITH 50 MICRO" GOLD ON MATING AREAS. 50 MICRO" MIN. NICKEL OVERALL. 100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 COLOR: BLACK.
 FLAMMABILITY RATING UL 94V-0

SHIELD: COPPER ALLOY

PLATING: NICKEL WITH TIN DIPPED PCB TAILS.

RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING AT 260°C MAX. FOR 5 SEC MAX.

PART NO.: RJSBE-5380-C1

DRAWN	G.HSIA	DATE	APR07/13
DESIGNED			
CHECKED	L.CHAN	DATE	APR07/13
I. E. APPRD.			
Q. A. APPRD.			
DWG. APPRD.			
ENG. REL. NO.			
REF.			
DIMENSIONS ARE IN	CODE ID. NO.		
INCHES [mm]	03554		

Amphenol Canada Corp.

TITLE
 RJ45 MODULAR JACK
 8 POSITION, 8 CONTACTS,
 SHIELDED - RoHS COMPLIANT

DWG. DRAWING NO.
 P-RJSBE-5380-C1
 REV. A

SCALE WT. SURF. SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.