
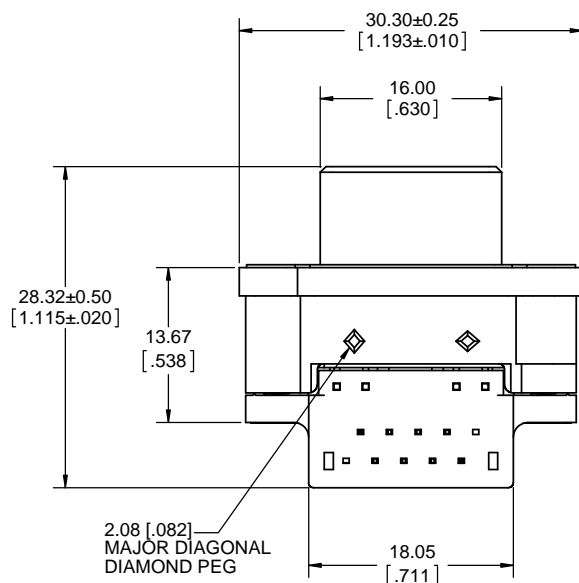
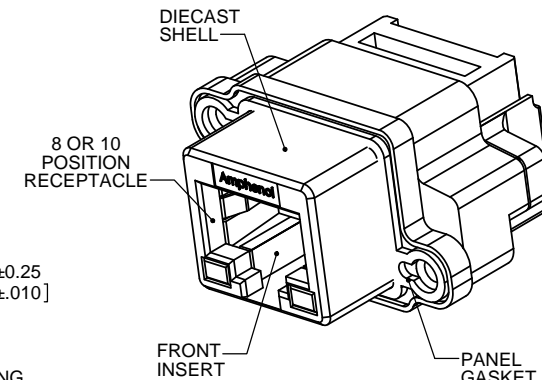
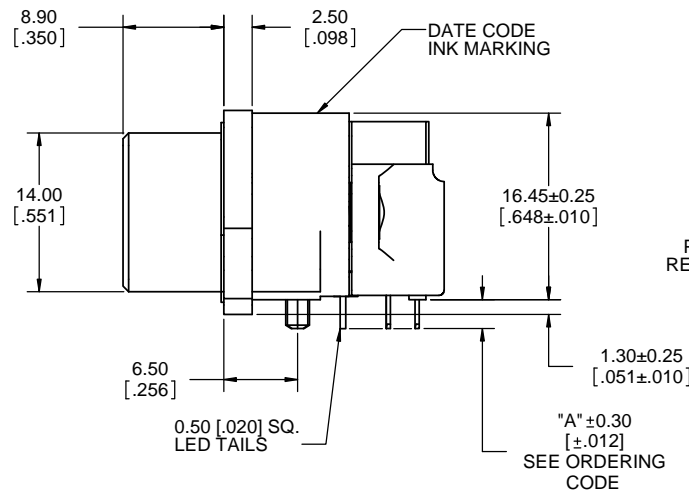


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
E	PRODUCT DRAWING (EAR 14349)	FEB24/15	K.L.
F	PRODUCT DRAWING (EAR 14415)	JAN14/16	K.L.

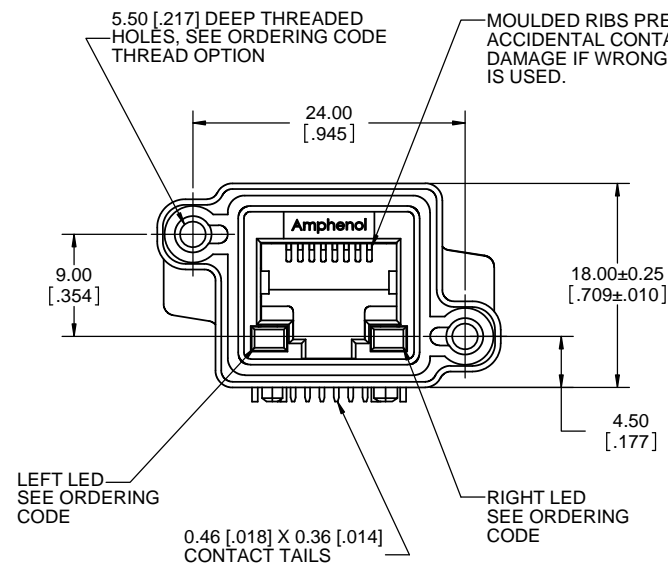

ORDERING CODE: **MRJR-53XX-X1**

SERIES, RUGGED RJ

RJ45 RECEPTACLE, RIGHT ANGLE PCB TAIL

NUMBER OF CONTACTS:

8 = 8 CONTACTS

A = 10 CONTACTS

LED OPTION:

0 = NONE

1 = GREEN LEFT, YELLOW RIGHT

4 = YELLOW LEFT, GREEN RIGHT

5 = GREEN LEFT, GREEN RIGHT

7 = RED LEFT, GREEN RIGHT

A = BI-COLOUR GREEN/YELLOW LEFT

BI-COLOUR GREEN/YELLOW RIGHT

D = GREEN LEFT

BI-COLOUR GREEN/YELLOW RIGHT

E = YELLOW LEFT

BI-COLOUR GREEN/YELLOW RIGHT

TAIL LENGTH AND MOUNTING HOLE THREAD OPTION:

0 = "A" 2.54 [.100], #4-40 UNC

B = "A" 3.81 [.150], #4-40 UNC

M = "A" 2.54 [.100], M3 X 0.5

P = "A" 3.81 [.150], M3 X 0.5

SINGLE PORT

NOTES:

- MATERIAL:
ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU AND AMENDMENTS
 - SHELL - DIECAST ZINC, NICKEL PLATED
 - CONTACTS - PHOSPHOR BRONZE WITH 1.27µm [50 µ"] MIN GOLD OVER 1.27µm [50 µ"] MIN NICKEL ON THE MATING AREA AND MATTE TIN OVER NICKEL ON THE CONTACT TAILS.
 - INSERTS - ENGINEERING THERMOPLASTIC, UL94V-0 FLAMMABILITY RATING
 - REAR INSERTS: BLACK NYLON, FRONT INSERT: CLEAR POLYCARBONATE
 - GASKET - SILICONE RUBBER, CONDUCTIVE, BLACK
 - LED'S - EPOXY LENS, STEEL TAILS WITH TIN PLATING
- ENVIRONMENTAL PERFORMANCE PER IEC 60529 CODE IP67 FOR SEAL BETWEEN MATING AREA AND PCB SIDE OF CONNECTOR. GASKET PROVIDES SEAL TO INSIDE FACE OF PANEL.
- CURRENT RATING: 1.5 AMPERES
- CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM
- OPERATING TEMPERATURE: -40C TO +105C
- LED CHARACTERISTICS: FORWARD DC CURRENT 25 mA MAX., FORWARD VOLTAGE 2.5V MAX. @ 2 mA
- AVAILABLE MATING AREA COVERS PROVIDE ADDED PROTECTION. CONSULT WITH AMPHENOL CANADA FOR DETAILS.
- CUSTOMER TO VERIFY THAT ALL PROCESS CLEANERS ARE COMPATIBLE WITH POLYCARBONATE MATERIAL.
- AVAILABLE MATING AREA COVERS PROVIDE ADDED PROTECTION. CONSULT WITH AMPHENOL CANADA FOR MORE DETAILS.

SPECIAL CONNECTORS
MANY UNIQUE FEATURES ARE READILY AVAILABLE TO SUIT CUSTOMER REQUIREMENTS. CONSULT WITH AMPHENOL CANADA FOR DETAILS.

UNLESS SPECIFIED OTHERWISE	DRAWN	T.KEARSE	OCT20/11
PRIMARY UNITS MILLIMETERS	CHECKED	K. LAMBIE	OCT20/11
SECONDARY UNITS INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE	ENG. REL. NO.	EAR 13977	
2 DECIMAL PLACES ±0.15	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION		
ANGULAR DEGREES			


Amphenol Canada Corp. www.amphenolcanada.com			
MRJR SERIES RUGGED MODULAR JACK, RIGHT ANGLE, 8 OR 10 POSITION, LED, TAIL LENGTH & THREAD OPTIONS, ROHS COMPLIANT			
DWG. NO.	P-MRJR-53XX-X1		
CODE ID NO. 03554	DWG. SIZE: X	SCALE: 3:1	SHEET 1 OF 2




RECOMMENDED PCB LAYOUT COMPONENT SIDE OF BOARD

8 POSITION VIEW


LOCATE HOLES
 $\varnothing 0.13$ [.005] DIA
 POSITION DIMENSIONS
 ARE BASIC

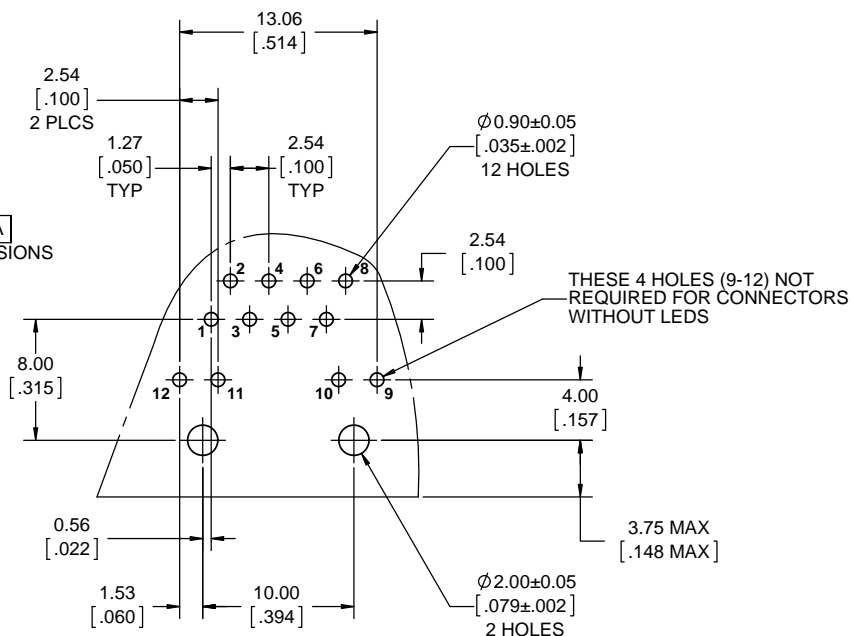


8 POSITION LED SCHEMATIC RED, GREEN OR YELLOW

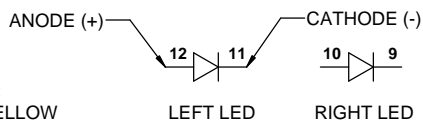



BI-COLOUR LED SCHEMATIC LEFT OR RIGHT SIDE, 8 OR 10 POSITION

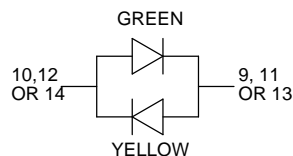


10 POSITION VIEW

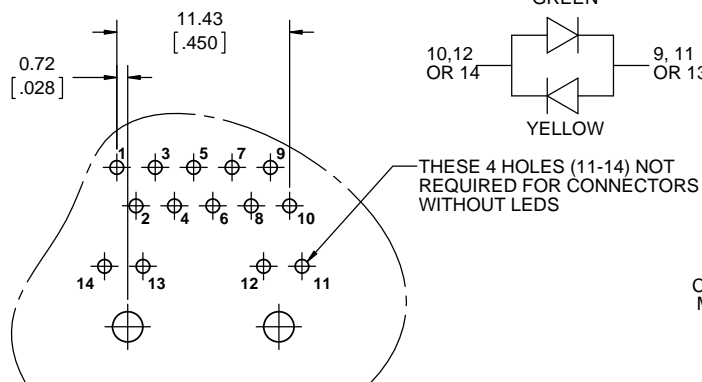

10 POSITION LED SCHEMATIC RED, GREEN OR YELLOW

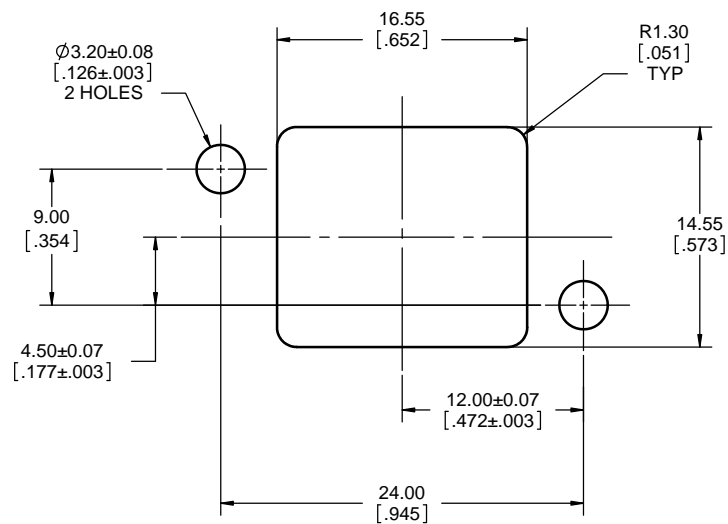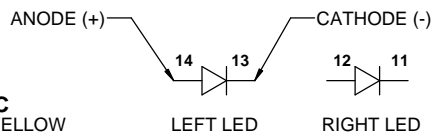

RECOMMENDED PANEL CUTOUT OUTSIDE PANEL VIEW

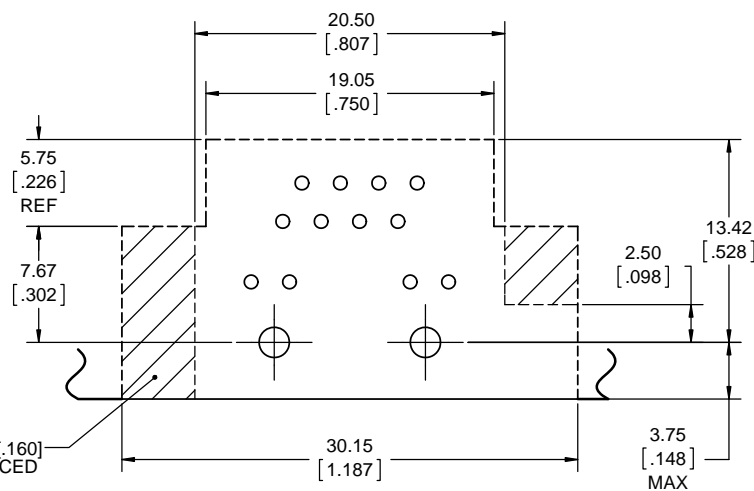

RECOMMENDED KEEP-OUT ZONE COMPONENT SIDE OF BOARD



UNLESS SPECIFIED OTHERWISE	DRAWN	T.KEARSE	OCT20/11
PRIMARY UNITS MILLIMETERS	CHECKED	K. LAMBIE	OCT20/11
SECONDARY UNITS INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE	ENG. REL. NO.	EAR 13977	
2 DECIMAL PLACES ±0.15	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION		
ANGULAR DEGREES	DO NOT SCALE DRAWING		

Amphenol Canada Corp.
www.amphenolcanada.com

**MRJR SERIES RUGGED MODULAR JACK,
 RIGHT ANGLE, 8 OR 10 POSITION, LED,
 TAIL LENGTH & THREAD OPTIONS,
 ROHS COMPLIANT**

DWG. NO.	REV
P-MRJR-53XX-X1	F
CODE ID NO. 03554	DWG SIZE: X
SCALE: 5:1	SHEET 2 OF 2