

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case that the application demands a high level of reliability, such as automotive,  
please contact a company representative for further information.

1 2 3 4 5 6 7 8

A

B


C

D

E

F

Mated figure

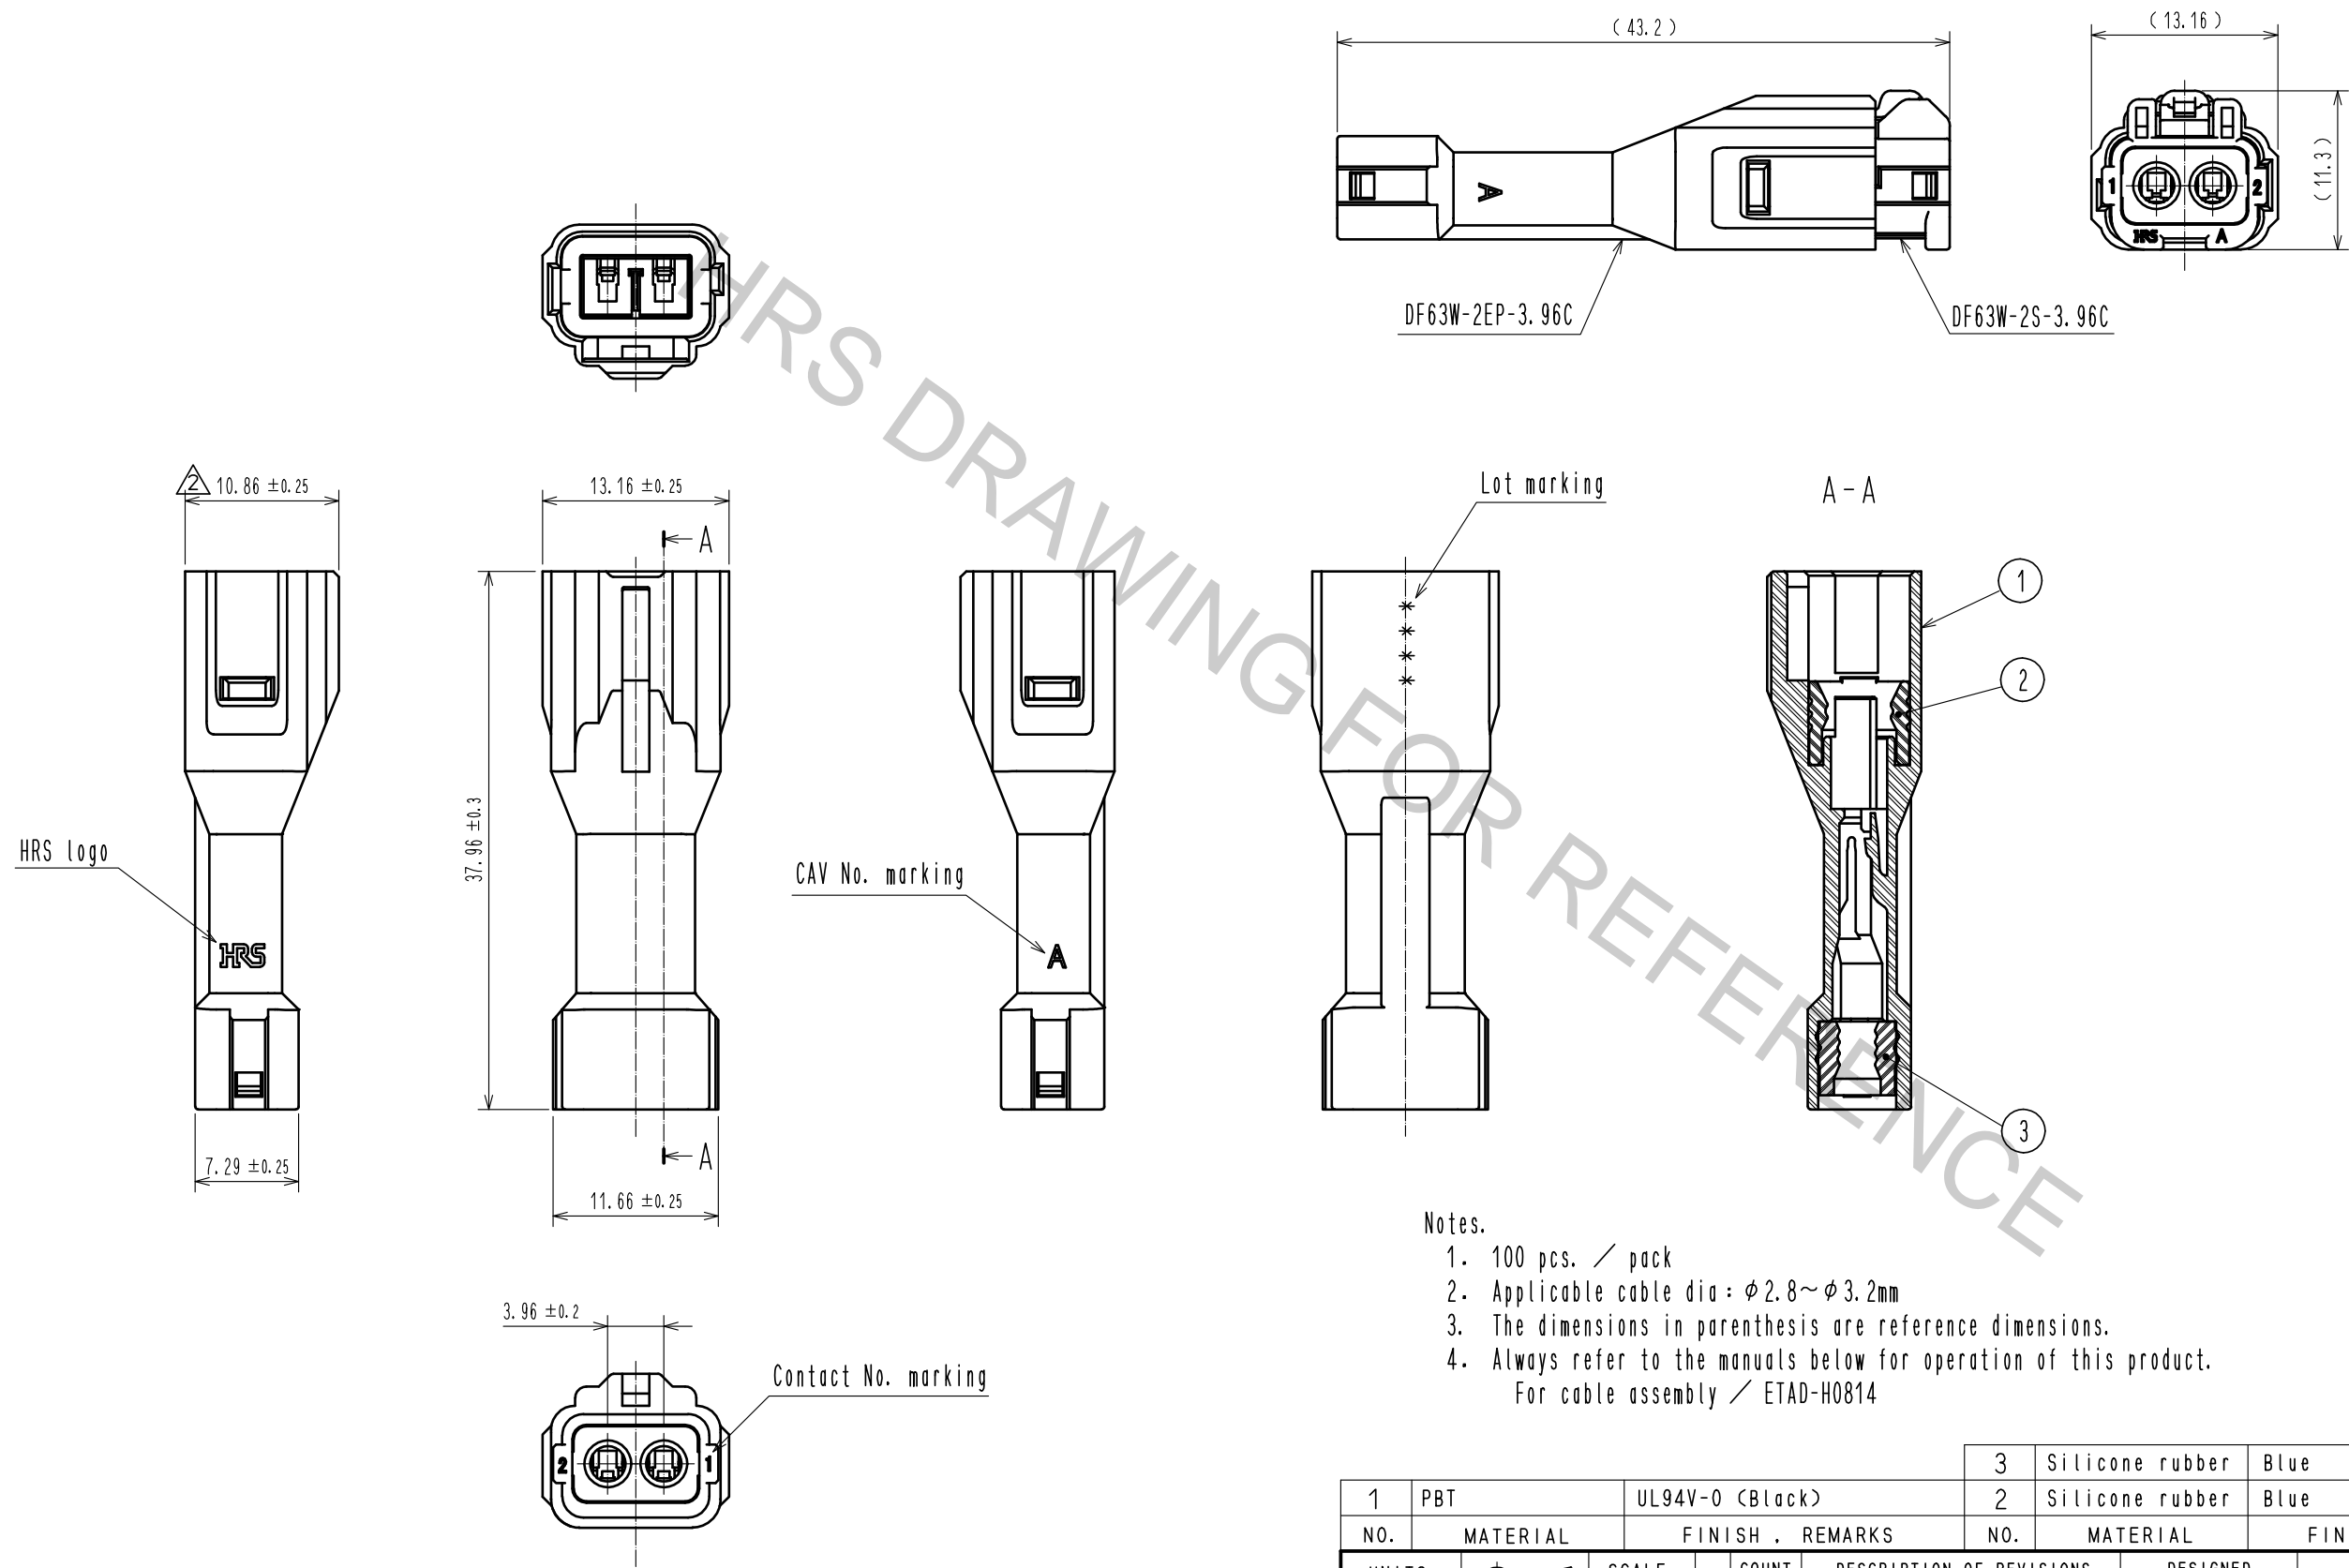

- Notes.
1. 100 pcs. / pack
  2. Applicable cable dia :  $\phi 2.8 \sim \phi 3.2$ mm
  3. The dimensions in parenthesis are reference dimensions.
  4. Always refer to the manuals below for operation of this product.  
For cable assembly / ETAD-H0814

1	PBT	UL94V-0 (Black)	3	Silicone rubber	Blue
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00000968	DESIGNED TO. HORII
HIROSE ELECTRIC CO., LTD.		APPROVED : HK. UMEHARA	15. 03. 10	DRAWING NO.	EDC-359247-00-00
		CHECKED : HK. UMEHARA	15. 03. 10	PART NO.	DF63W-2EP-3. 96C
		DESIGNED : TO. HORII	15. 03. 10	CODE NO.	CL680-0605-9-00
		DRAWN : TO. HORII	15. 03. 10		
		DATE	15. 10. 07		

FORM HC0011-5-7 1 2 3 4 5 6 7 8