




Top View of Assembly

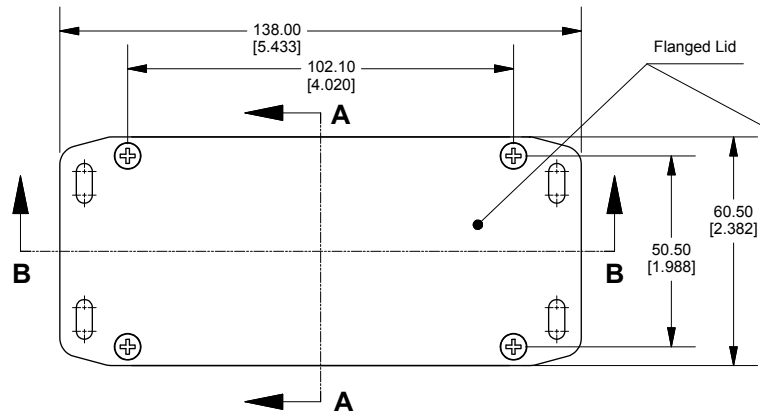


SECTION A-A End View of Assembly

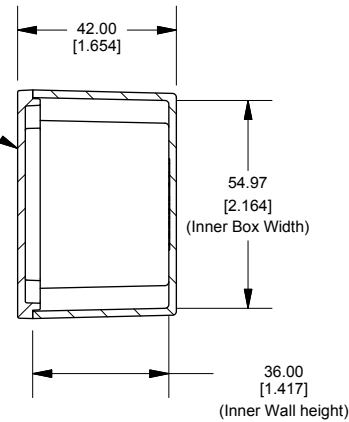


SECTION B-B Side View of Assembly

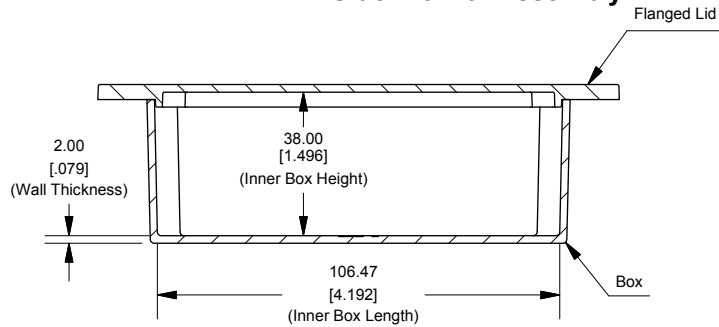


Top View Looking Inside Box

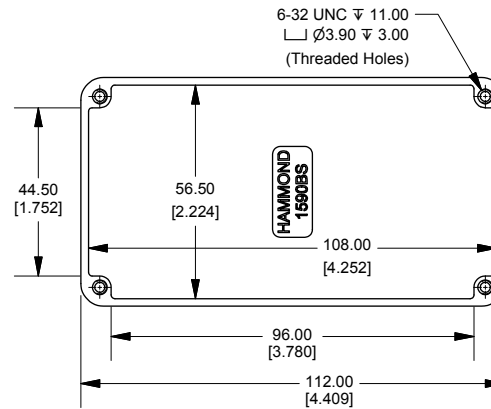

Flanged Lid

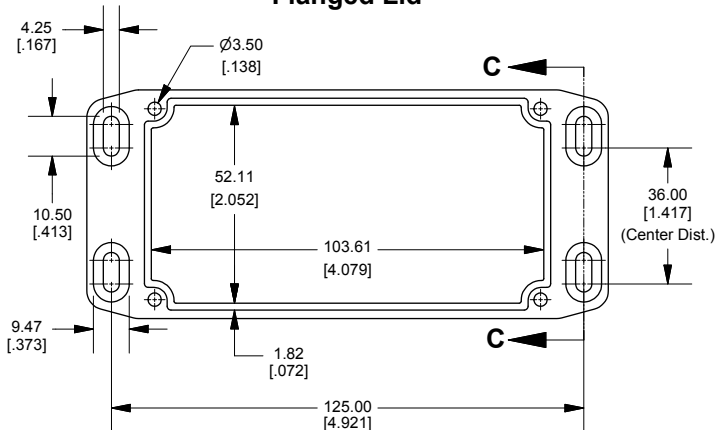

SECTION C-C Side of Slot



Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTE

Purchased assembly includes box, lid and 4 cover screws.
Box and lid are made from Diecast Aluminum Alloy.
Silicone Gasket supplied with liquid resistant enclosure.

PART NUMBERS

1590BSFL Enclosure

Natural Finish Enclosure	1590BSFL
--------------------------	----------

Black Textured Enclosure	1590BSFLBK
--------------------------	------------

1590BSFL Liquid Resistant Enclosure (Silicone Gasket)

Natural Finish Enclosure	1590WBSFL
--------------------------	-----------

Black Textured Enclosure	1590WBSFLBK
--------------------------	-------------

ACCESSORIES

Recommended Torque: 75 ozf.in / 55 cN.m

Liquid Resistant Cover Screws

Stainless Steel Cover Screws (Pkg 100) [6-32 x 1/2" With O-Ring]	1590WMS100
---	------------

Black Stainless Steel Cover Screws (Pkg 100) [6-32 x 1/2" With O-Ring]	1590WMS100BK
---	--------------

Standard Cover Screws

Plated Cover Screws (Pkg 100) [6-32 x 1/2"]	1590MS100
--	-----------

Black Cover Screws (Pkg 100) [6-32 x 1/2"]	1590MS100BK
---	-------------

Dimensions:
mm
[inches]

HAMMOND
MANUFACTURING™
1590BSFL
www.hammondmfg.com