MICRO SWITCH
FREEPORT, ILLINOIS. U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN234

CATALOG LISTING BZE6-2RN234 PAGE 1 OF 1

ISSUE	RELEASE NO.	REPLACES
M	22FEB11	

CHECK	DRAWN	CHECK	CHECK	CHECK
KNR	22 AUG 77	K P K 25 JUL 77	PSR	

REVISIONS

M	0025947	29AUG07
	KNS 30OCT06	
N	0033014	
	BS 29AUG07	
P	0074592	
	SBH 22FEB11	

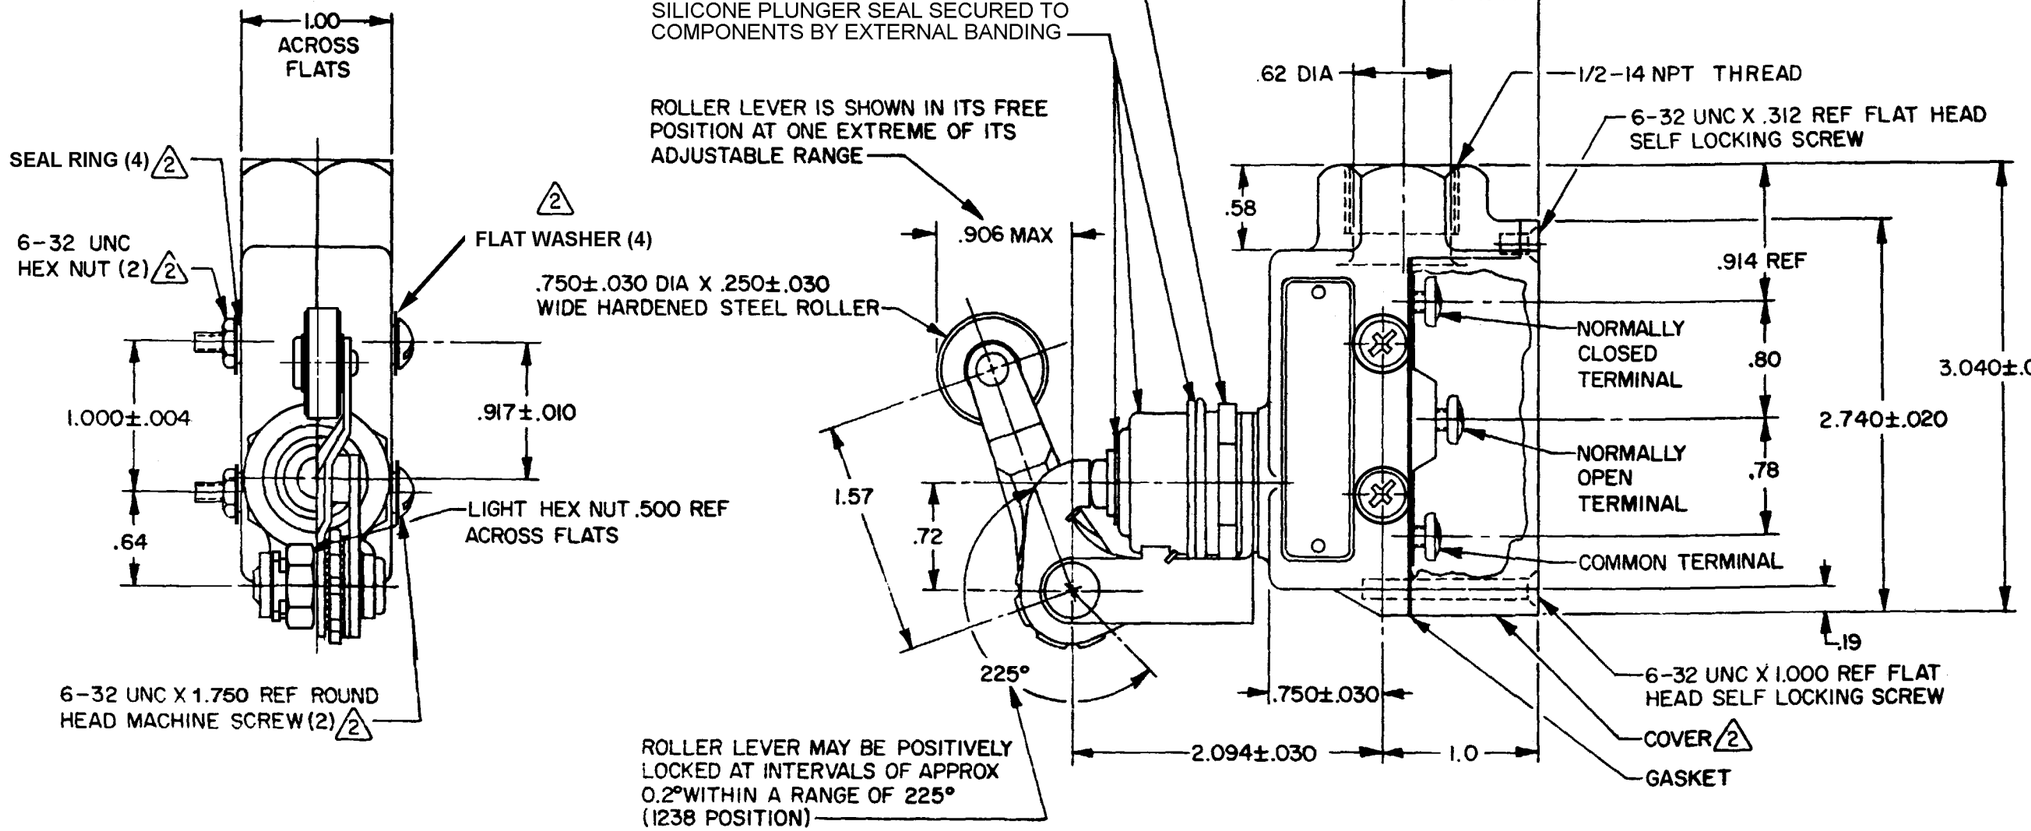

NOTES

1 – 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
2 FURNISHED UNASSEMBLED
3 – ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
4 - TEMPERATURE RANGE: -40° F TO +160° F (-40° C TO +71° C)
5 - SEAL RATING: NEMA 1,3,4
IP66

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	14 - 26 OZ
RELEASE FORCE	10 OZ MIN
PRETRAVEL	.188 MAX
DIFFERENTIAL TRAVEL	.006 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BZ-2RN7022

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC
CODE L74
CE 1.5A, 240 Vac

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±1°

WEIGHT .71 LB

RASTER