
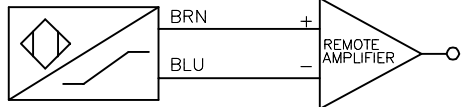
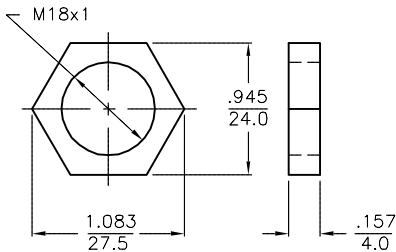



WIRING DIAGRAM	
	

LOCKNUT LN-M18	
	

SPECIFICATIONS	
RATED OPERATING DISTANCE	5mm [.197]
MOUNTING MODE	FLUSH
MIN. REPEAT ACCURACY	≤ 2%
TEMPERATURE DRIFT	≤ ±10%
HYSTERESIS	1-10%
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
OUTPUT FUNCTION	2-WIRE, NAMUR
SWITCHING FREQUENCY	≤ 1.0 kHz

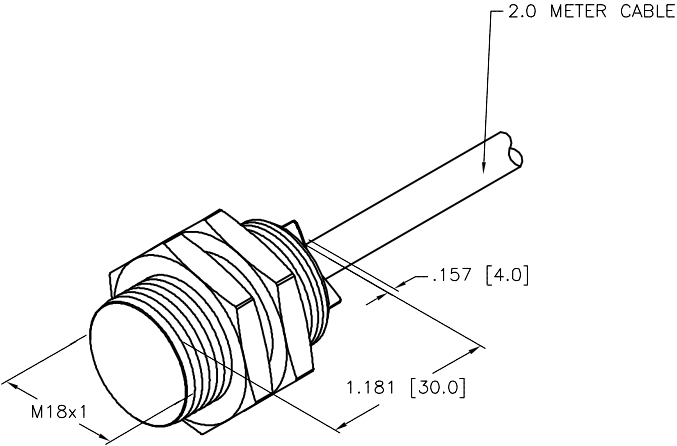

SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>					
					<div>MATERIAL</div> <div>SEE NOTES</div>		<div>DRFT</div> <div>SMW</div>		<div>DATE</div> <div>03/19/87</div>		<div>DESCRIPTION</div> <div>BI 5-G18-YO</div>	
							<div>APVD</div>		<div>SCALE</div> <div>1 = 1.0</div>			
					<div>FINISH</div> <div>SEE NOTES</div>		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div> <div>CONTACT TURCK FOR MORE INFORMATION</div>		<div>UNIT OF MEASUREMENT</div> <div>INCH [MILLIMETER]</div>		<div>IDENTIFICATION NO.</div> <div>T1006000</div>	
<div>DO NOT SCALE THIS DRAWING</div>		<div>FILE: T1006000</div>		<div>SHEET 1 OF 1</div>								
D	UPDATE SPECIFICATIONS		NF	02/02/15	48841							
REV	DESCRIPTION		BY	DATE	ECO NO.							