

Mini HDMI Type C Plug to VGA Receptacle Adaptor

pro-SIGNAL

RoHS
Compliant




Specifications

Convert From	: Mini HDMI Type C Plug, 19 Pin
Convert To	: VGA Receptacle, 15 Pin
Cable Length	: 190mm
Colour	: Black, White

Electronic Tests

Open / Short / Intermittence	: 100%
Hi-Pot	: AC 300V, 0.01S, 1mA
Insulation Resistance	: DC 300V, 0.01S, 10M Ω Min.
Conductive Resistance	: 3 Ω Max.
Computer Test	: 1080P @ 60Hz

Diagram

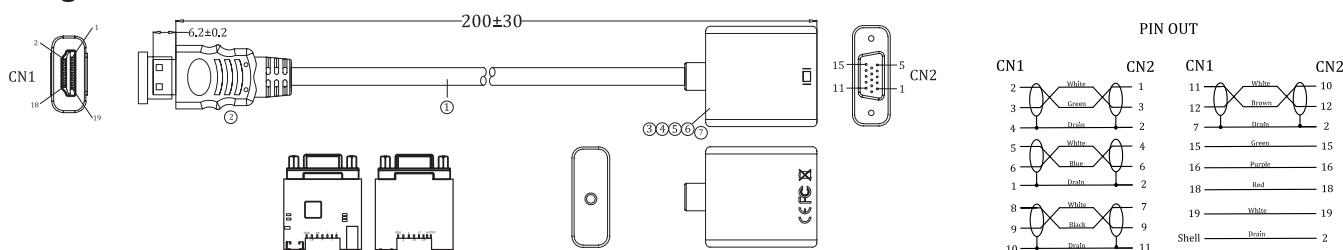

Dimensions : Millimetres

No.	Parameter	Specifications
1	Cable	UL20276 [32AWG(7/0.08TC) * 1P + D(7/0.08TC) + Al-My] * 5 + 32AWG(7/0.08TC) * 4C + D(7/0.08BC) + Al-Foil + B(80/0.12 Al-Mg), PVC Jacket, OD: 4.8±0.2mm
2	Connector - A	Mini HDMI Type C Male, 19 Pin, Gold Plated Shell, Gold Flash Contacts
3	Connector - B	VGA Female, 15 Pin, Nickel Plated Shell, Gold Flash Contacts, with IC
4	Inner Mold	LDPE
5	Outer Mold	45P PVC
6	Hood	VGA Female: ABS Shell
7	Dust Cover	Mini HDMI Type C Male: Transparent

Part Number Table

Description	Part Number
Mini HDMI Type C Plug to VGA Receptacle Adaptor, 190mm, Black	PS000263
Mini HDMI Type C Plug to VGA Receptacle Adaptor, 190mm, White	PS000264

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-SIGNAL