

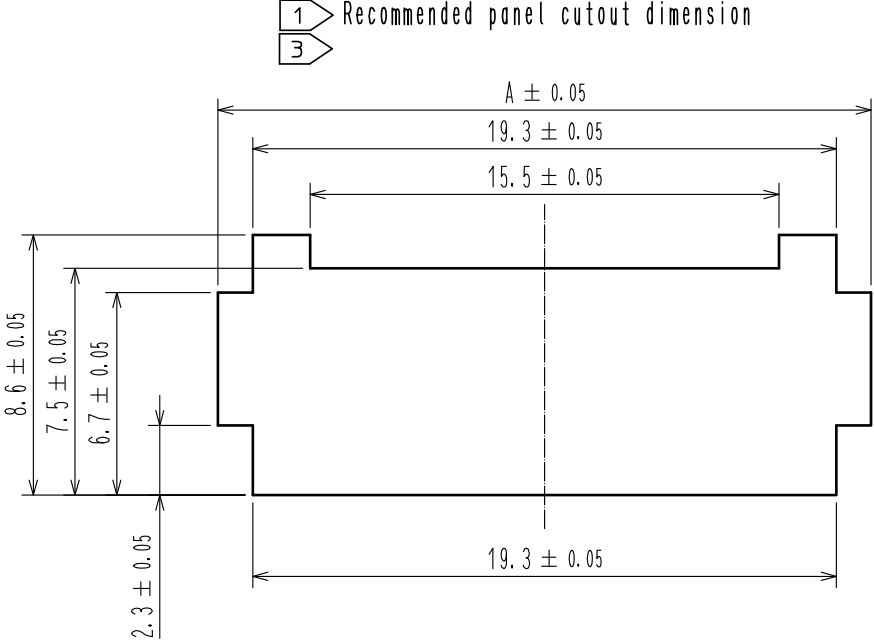
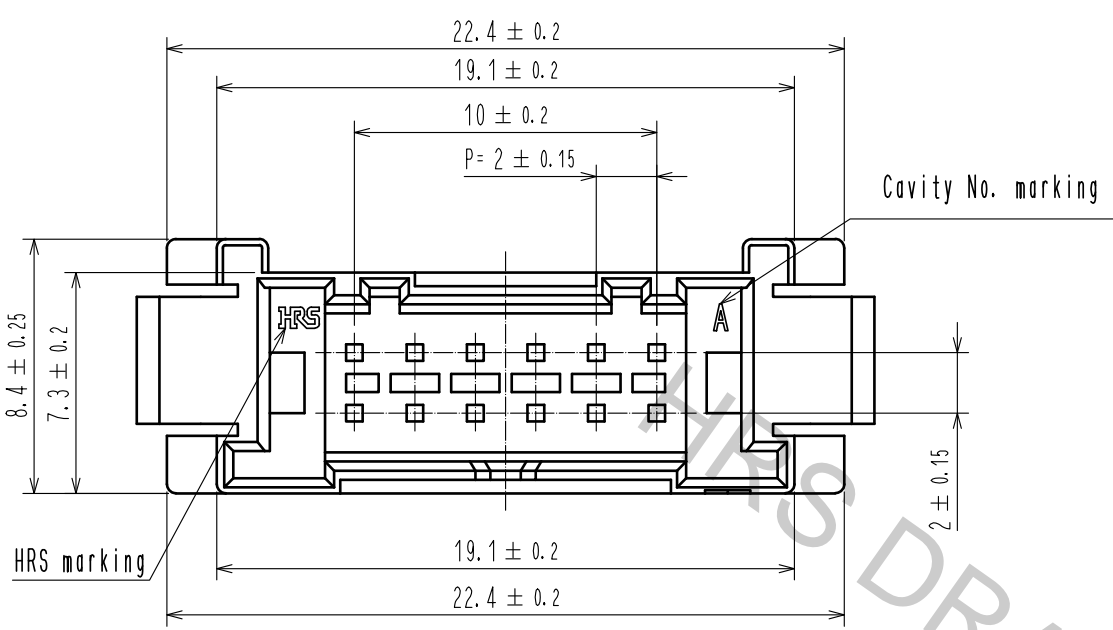
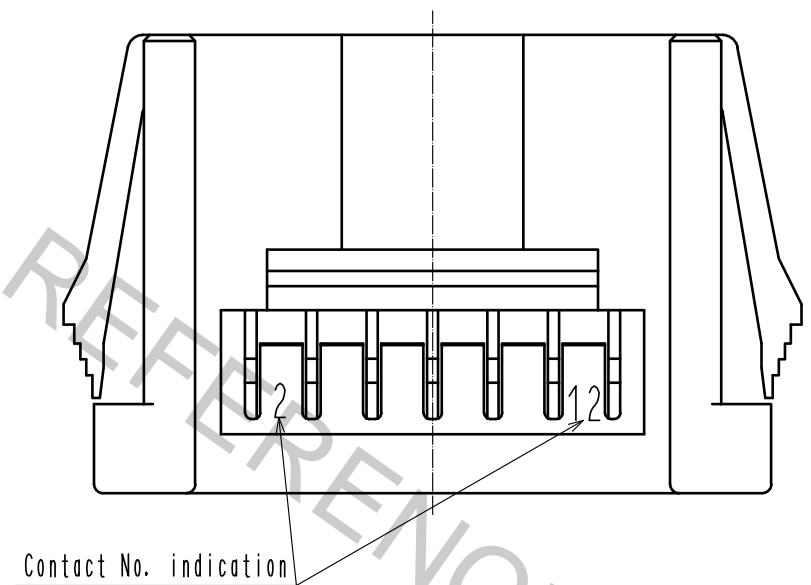


Mar.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

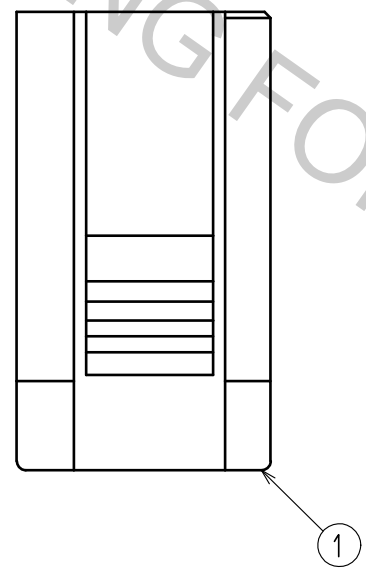

| Panel thickness | A |
|-----------------|------|
| 0.5~0.8 | 21.6 |
| 0.9~1.3 | 22.1 |
| 1.4~1.8 | 22.5 |
| 1.9~2.3 | 22.9 |

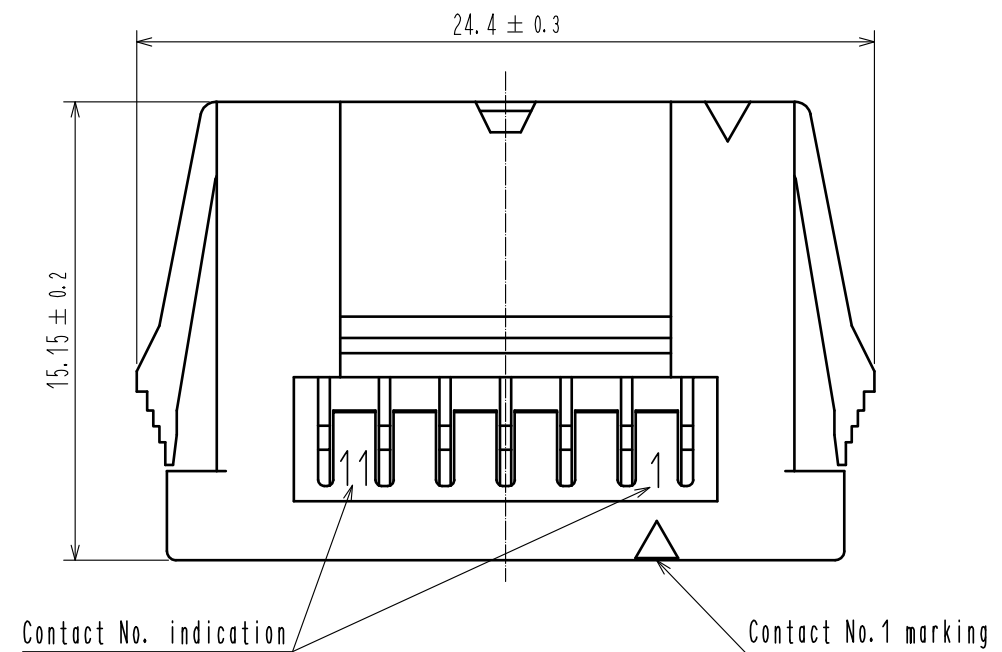

Note 1 Please use non-radius side for the panel hooking area.
2 Applicable panel thicknessing is 2.3 to 0.5 mm.
3 Consult hirose for the other panel cutout designs than recommended one.
4. Per pack : 100 pieces.
5. UL(File No.E52653),
C-UL(File No.E52653) authorization article.



| | | | | | | | | |
|-------------|--|---------------------------------|--|-------------------------|--|------------------------------------|-----|---------------------|
| NO. | | MATERIAL | | FINISH . REMARKS | | 1 | PBT | UL94V-0. BLACK |
| UNITS mm | | SCALE 4 : 1 | | COUNT 1 | DESCRIPTION OF REVISIONS DIS-H-00004537 | DESIGNED TS.MIYAKI | | CHECKED HS.OKAWA |
| HRS | | HIROSE ELECTRIC CO., LTD. | | APPROVED : HS. OKAWA | 20160601 | DRAWING NO. EDC-366286-00-00 | | DATE 20181221 |
| | | | | CHECKED : YN. TAKASHITA | 20160601 | PART NO. DF51-12DEP-2C | | |
| | | | | DESIGNED : TT. OHSAKO | 20160601 | CODE NO. CL543-5075-0-00 | | |
| | | | | DRAWN : TT. OHSAKO | 20160601 | | | |