






Panel thickness	A
0.5~0.8	33.6
0.9~1.3	34.1
1.4~1.8	34.5
1.9~2.3	34.9

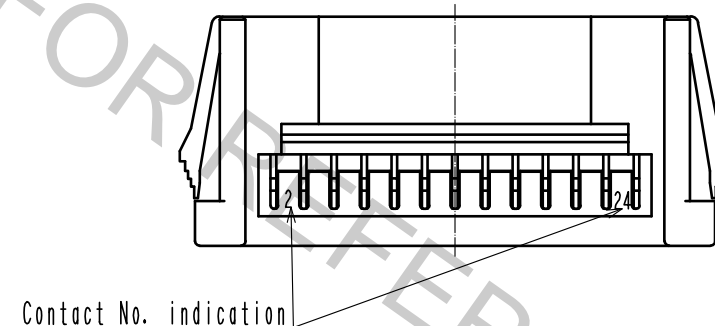

- Note 1 Please use non-radius side for the panel hooking area.
2 Applicable panel thickening is 2.3 to 0.5 mm.
3 Consult Hirose for the other panel cutout designs than recommended one.
4. Per pack : 100 pieces.
- 1 5. UL (File No. E52653).
C-UL (File No. E52653) authorization article



				1	PBT		UL94V-0, BLACK		
NO.	MATERIAL		FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS	
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
				1	DIS-H-00004547		TS.MIYAKI	SZ.ONO	20181225
			APPROVED :HS. OKAWA		20160601	DRAWING NO.		EDC-366292-00-00	
			CHECKED :YN. TAKASHITA		20160601	PART NO.		DF51-24DEP-2C	
			DESIGNED :TT. OHSAKO		20160601	CODE NO.		CL543-5081-0-00	
 HIROSE ELECTRIC CO., LTD.			DRAWN :TT. OHSAKO		20160601			