


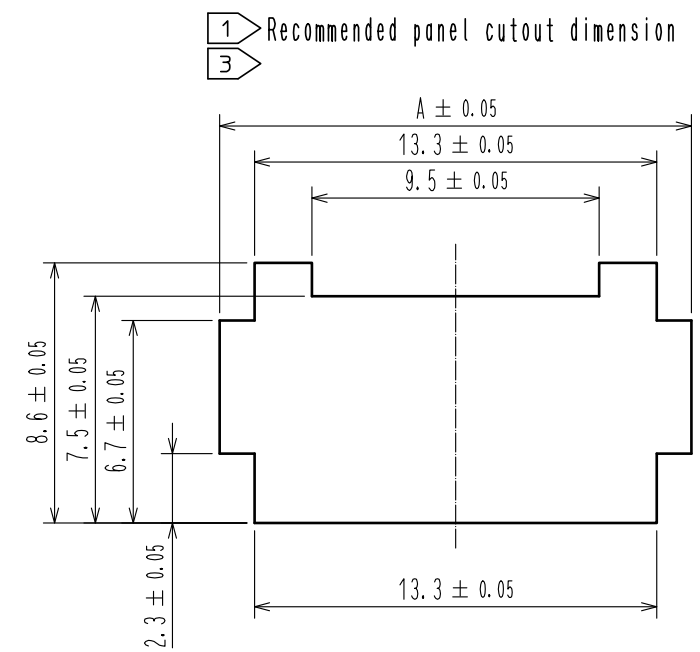
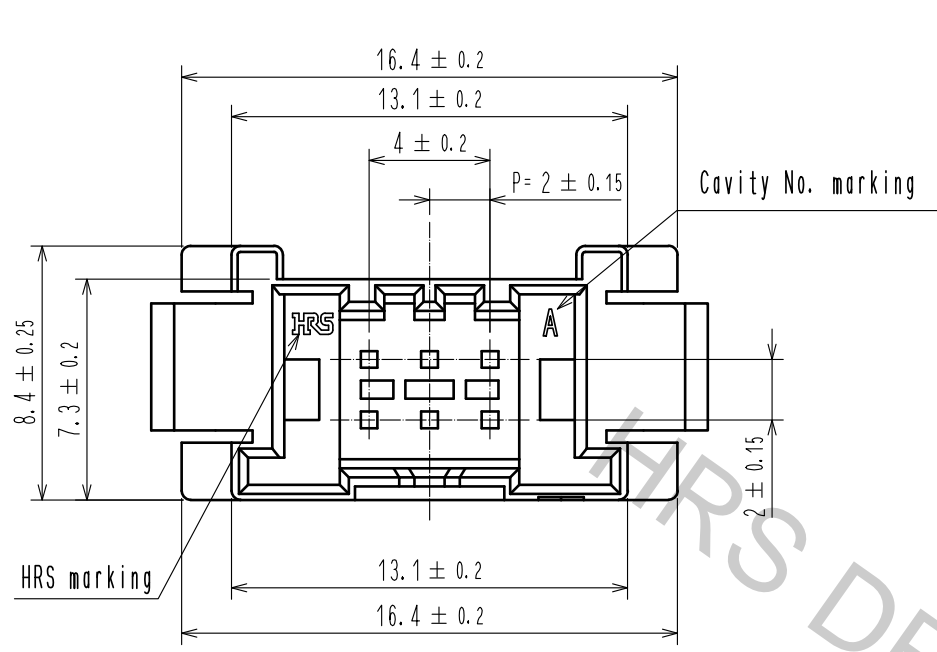


Mar.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

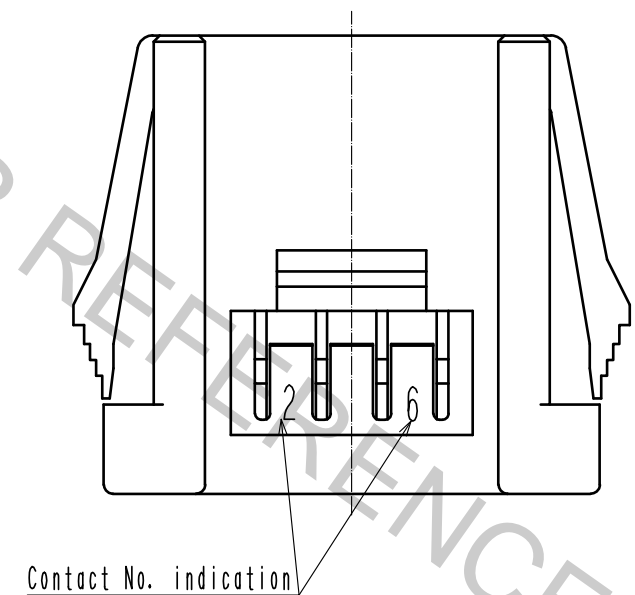


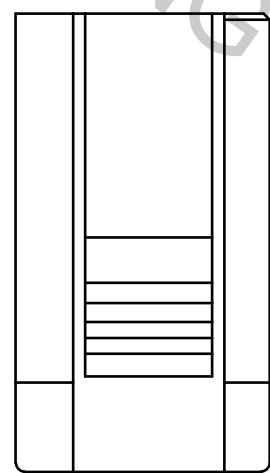


Panel thickness	A
0.5~0.8	15.6
0.9~1.3	16.1
1.4~1.8	16.5
1.9~2.3	16.9

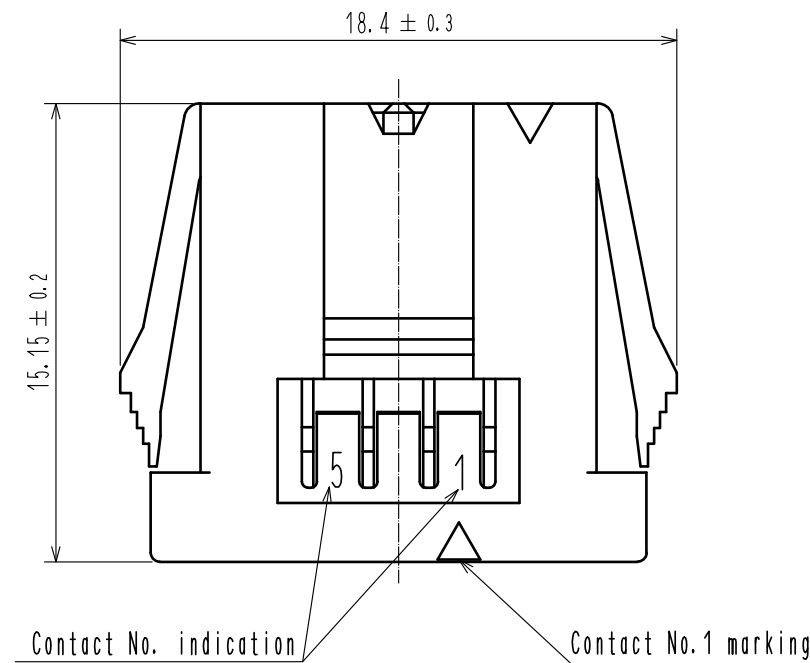

Note 1 Please use non-radius side for the panel hooking area.
2 Applicable panel thicknessing is 2.3 to 0.5 mm.
3 Consult hirose for the other panel cutout designs than recommended one.
4. Per pack : 100 pieces.
5. UL(File No.E52653),
C-UL(File No.E52653) authorization article.



			c7k1us			1		PBT		UL94V-0. BLACK									
NO.		MATERIAL		FINISH . REMARKS				NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 4 : 1				COUNT 1		DESCRIPTION OF REVISIONS DIS-H-00004537				DESIGNED TS.MIYAKI		CHECKED HS.OKAWA		DATE 20181221	
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				20160601		DRAWING NO.		EDC-366283-00-00							
				CHECKED : YN. TAKASHITA				20160601		PART NO.		DF51-6DEP-2C							
				DESIGNED : TT. OHSAKO				20160601		CODE NO.		CL543-5072-0-00							
				DRAWN : TT. OHSAKO				20160601											
																		1/1	