


CARRIER STRIP PROGRESSION


SCALE 2:1

NOTES:


1. MATERIAL: BRASS
2. FINISH: 20 MICROINCH / (0.5 MICROMETER) MIN. HOT TIN DIP OVERALL.
3. PRODUCT SPECIFICATION: PS-44441-9999.
4. PACKAGING: TERMINALS WOUND ON 24" REELS WITH PAPER INTERLEAF.
5. THIS TERMINAL FOR USE WITH 18-20 AWG STRANDED WIRE, UL STYLE 1015, 1056 OR SPT-3 WIRE, .180/4.57 MAXIMUM INSULATION DIAMETER.
6. TERMINAL MATES TO .125/3.18 WIDE X .020/0.51 THICK FLAT BLADE TERMINALS. MATING CRIMP TERMINAL: 43178 SERIES.
7. TERMINAL HAS TPA (TOTAL POSITIONING ASSURANCE) OPTIONAL ACTIVATION FEATURE THAT WHEN ACTIVATED AND USED WITH MOLEX "SABRE" SERIES RECEPTACLE HOUSINGS, PROVIDES SECONDARY LOCK SYSTEM WHICH ENSURES AGAINST TERMINAL BACKOUTS.






SECTION Z-Z
CONDUCTOR CRIMP



SECTION Y-Y
INSULATION CRIMP

CORRECT TOLERANCE EC NO: UCP2014-5466 DRWN: JDOX 2014/07/09 CHKD: BANDERSON 2014/07/09 APPR: FSMITH 2014/07/17 A1	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
			mm		INCH		DRAWN BY BWIRKUS	DATE 4-17-2009	TITLE TERMINAL, FEM, 18-20 AWG .125/(3.18) WIDE, W/TPA UL 1015, 1056 OR SPT-3 molex		
			3 PLACES ± --- ± .010		CHECKED BY BWIRKUS		DATE 4-17-2009				
			2 PLACES ± 0.25 ± .014		APPROVED BY APATEL		DATE 4-20-2009				
			1 PLACE ± 0.35 ± ---		MATERIAL NO. 433753001		DOCUMENT NO. SD-43375-311				
REV			ANGULAR ± 1/2°							SHEET NO. 1 OF 1	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

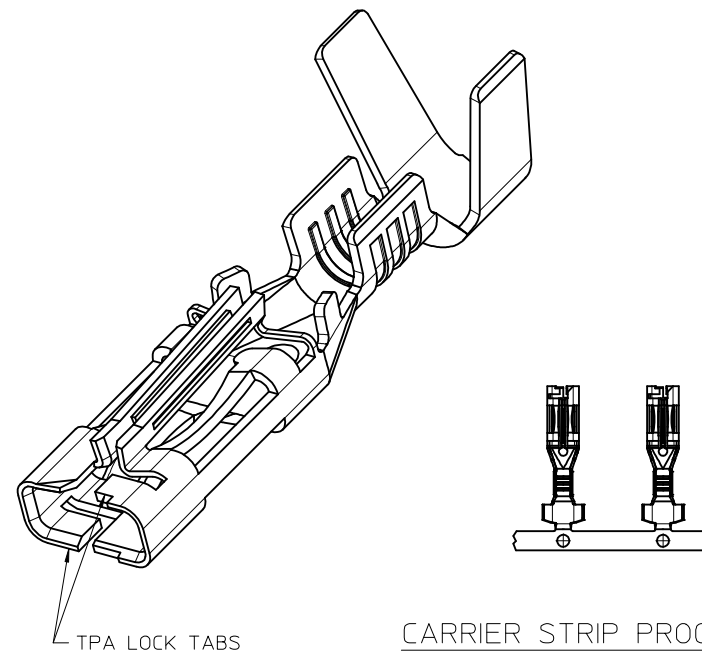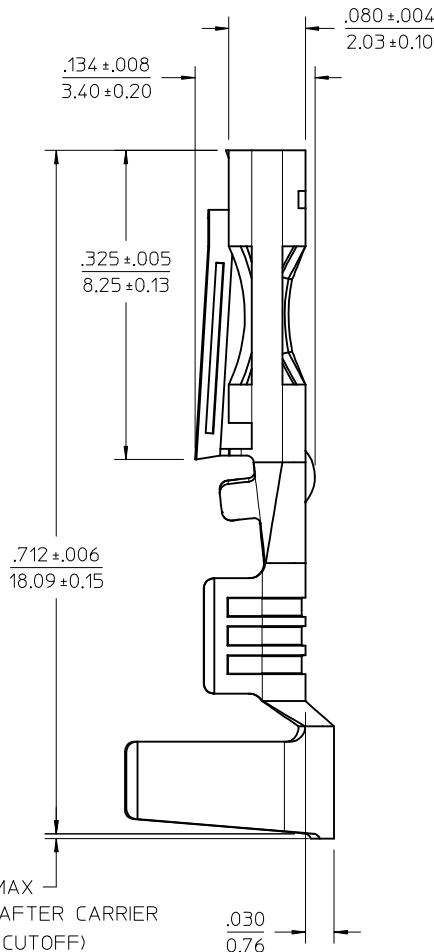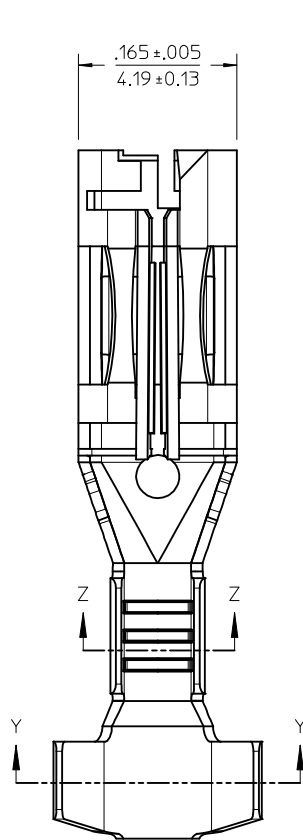


CARRIER STRIP PROGRESSION


SCALE 2:1

NOTES:


1. MATERIAL: BRASS
2. FINISH: 20 MICROINCH / (0.5 MICROMETER) MIN. HOT TIN DIP OVERALL.
3. PRODUCT SPECIFICATION: PS-44441-9999.
4. PACKAGING: TERMINALS WOUND ON 24" REELS WITH PAPER INTERLEAF.
5. THIS TERMINAL FOR USE WITH 18-20 AWG STRANDED WIRE, UL STYLE 1015, 1056 OR SPT-3 WIRE, .180/4.57 MAXIMUM INSULATION DIAMETER.
6. TERMINAL MATES TO .125/3.18 WIDE X .020/0.51 THICK FLAT BLADE TERMINALS. MATING CRIMP TERMINAL: 43178 SERIES.
7. TERMINAL HAS TPA (TOTAL POSITIONING ASSURANCE) OPTIONAL ACTIVATION FEATURE THAT WHEN ACTIVATED AND USED WITH MOLEX "SABRE" SERIES RECEPTACLE HOUSINGS, PROVIDES SECONDARY LOCK SYSTEM WHICH ENSURES AGAINST TERMINAL BACKOUTS.



SECTION Z-Z
CONDUCTOR CRIMP



SECTION Y-Y
INSULATION CRIMP

CORRECT TOLERANCE EC NO: UCP2014-5466 DRWN: JDOX 2014/07/09 CHKD: BANDERSON 2014/07/09 APPR: FSMITH 2014/07/17 A1	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
					mm	INCH	DRAWN BY BWIRKUS	DATE 4-17-2009	TITLE TERMINAL, FEM, 18-20 AWG .125/(3.18) WIDE, W/TPA UL 1015, 1056 OR SPT-3 molex		
			4 PLACES ± --- ± ---		CHECKED BY BWIRKUS		DATE 4-17-2009				
			3 PLACES ± --- ± .010		APPROVED BY APATEL		DATE 4-20-2009				
			2 PLACES ± 0.25 ± .014		MATERIAL NO. 433753001		DOCUMENT NO. SD-43375-311				
REV			1 PLACE ± 0.35 ± ---					SHEET NO. 1 OF 1			
			0 PLACE ± --- ± ---								
			ANGULAR ±1/2°								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			