


Type:

042020070




External dimensions: 200 x 200 x 72 mm

Weight: 1440 g


DIN rail length in mm	max. fitting length in mm	Mounting plate (thickness in mm)	External mounting brackets	External hinge* set	EMC version	SWB / SBL / SBGL corrosion protection	Allen lid screws	Silicone lid seal	Sealable lid screws in steel	Lid safety strip
TS 15/TS 35										
188	170	2	•	•	•	•	•	•	•	•

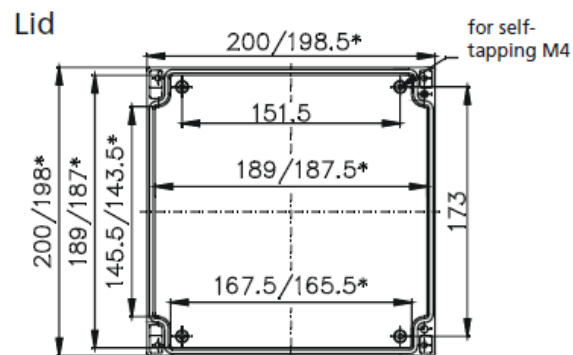


* = Conical form tapering downwards
Free dimensions-tolerance to GTA 13/5 DIN 1688

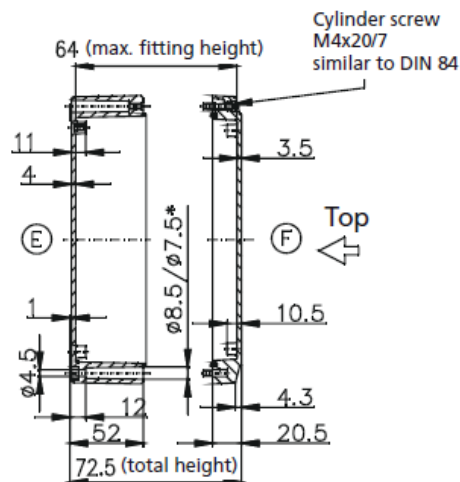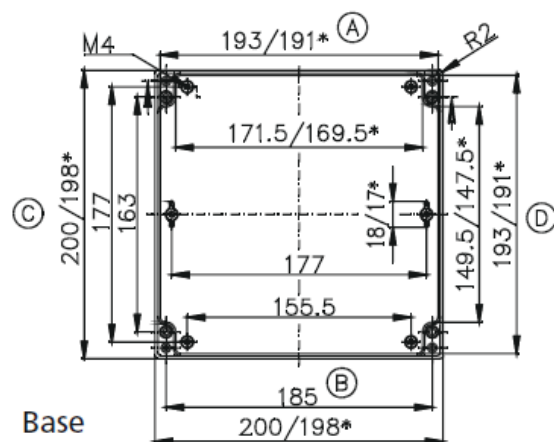

Maximum number of
cable glands to DIN 50262*



M	Corner dim.	Side		PG	Corner dim.	Side	
		A/B	C/D			A/B	C/D
12	17.25	20	17	7	17.25	20	17
16	25.30	9	8	9	21.85	14	13
20	27.60	7	6	11	25.30	8	7
25	37.95	4	4	13.5	27.60	7	6
32	48.30			16	31.05	6	5
40	60.95			21	37.95	4	4
50	69.00			29	48.30		
63	74.75			36	60.95		
				42	69.00		
				48	74.75		

DATE		7330 Executive Way Frederick, MD 21704 (301) 696-9411 voice (301) 696-9494 fax	
17 MAY 2017			
SHEET		ENCLOSURE, ALUFORM, ALUMINUM 200 X 200 X 72MM, RL 7038	
1			
DESCRIPTION			
SIZE	DRAWING NUMBER		REV
A	042020070		-