


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

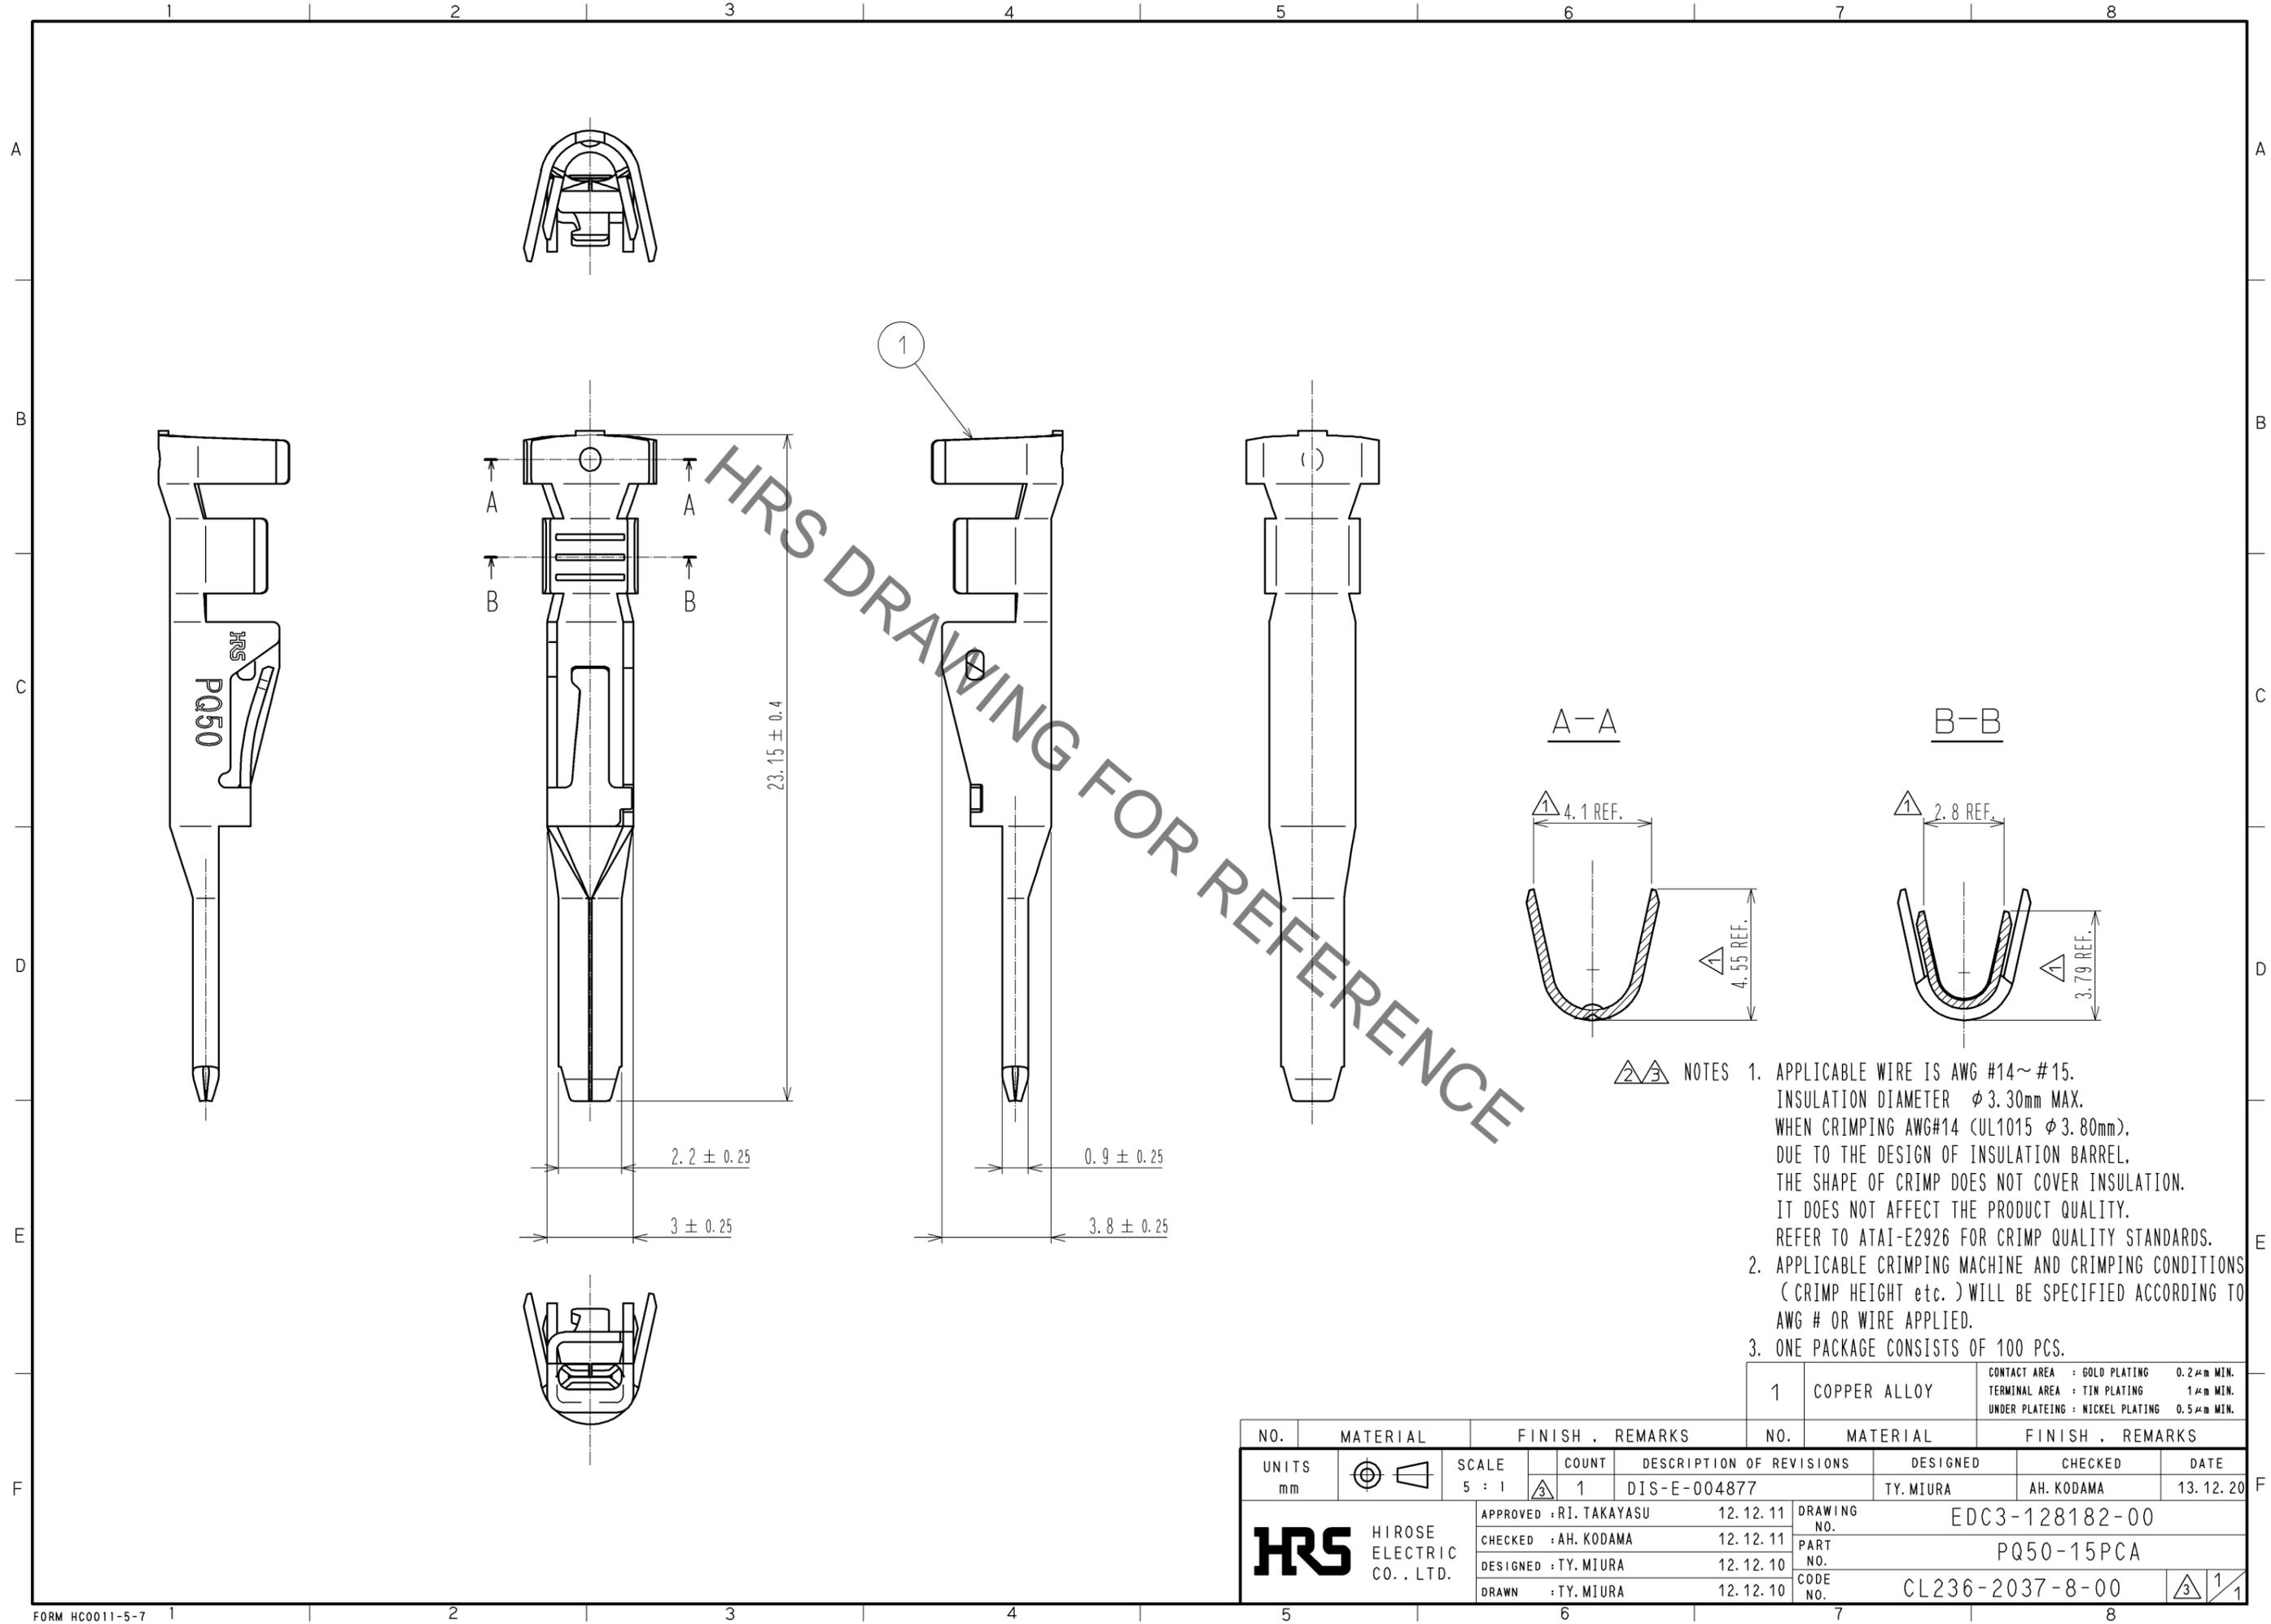

- NOTES
1. APPLICABLE WIRE IS AWG #14~#15. INSULATION DIAMETER ϕ 3.30mm MAX. WHEN CRIMPING AWG#14 (UL1015 ϕ 3.80mm). DUE TO THE DESIGN OF INSULATION BARREL, THE SHAPE OF CRIMP DOES NOT COVER INSULATION. IT DOES NOT AFFECT THE PRODUCT QUALITY. REFER TO ATAI-E2926 FOR CRIMP QUALITY STANDARDS.
 2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO AWG # OR WIRE APPLIED.
 3. ONE PACKAGE CONSISTS OF 100 PCS.

1	COPPER ALLOY	CONTACT AREA : GOLD PLATING 0.2 μ m MIN. TERMINAL AREA : TIN PLATING 1 μ m MIN. UNDER PLATING : NICKEL PLATING 0.5 μ m MIN.
---	--------------	---

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-004877	DESIGNED TY. MIURA
APPROVED : RI. TAKAYASU 12.12.11		DRAWING NO. EDC3-128182-00		CHECKED AH. KODAMA	
CHECKED : AH. KODAMA 12.12.11		PART NO. PQ50-15PCA		DATE 13.12.20	
DESIGNED : TY. MIURA 12.12.10		CODE NO. CL236-2037-8-00		1/1	
DRAWN : TY. MIURA 12.12.10					