
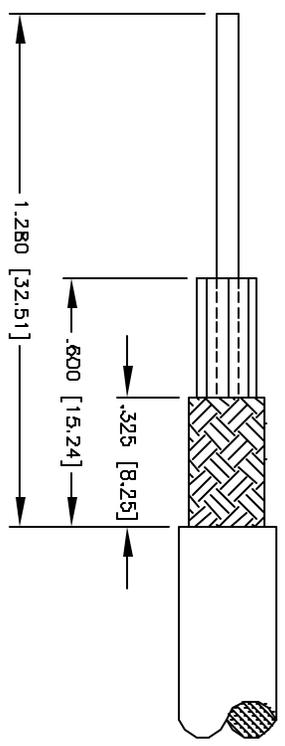
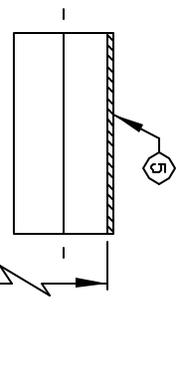


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005	Effective: 12/21/98	DCP No: 860				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
129	A	RELEASED	DJC	7/15/98	JC	7/15/98	JMM	7/15/98
718	B	CHANGED DIMENSIONS	DJC	3/8/99	JC	3/9/99	JC	3/9/99

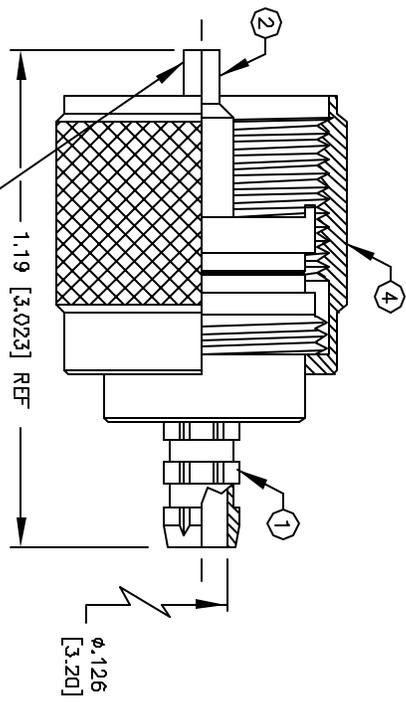

SUGGESTED STRIPPING INSTRUCTIONS
SUGGESTED CRIMP DIE: .213

SPECIFICATIONS:

IMPEDANCE: NON CONSTANT
WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0-500 MHz
FOR RG-58, 58A, 58C, 141, 141A, 400/U, BELDEN
B240, B259, B262, 9201, 9203, 9310, 9311,
COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL922463E
FOR TIMES LMR-200, LMR-200 ULTRAFLEX, ALPHA 9848 & MS1-22

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
5	FERRULE	1	BRASS	SILVER
4	SHELL	1	BRASS	SILVER
3	DIELECTRIC	1	TEFLON	NONE
2	CONTACT	1	BRASS	SILVER
1	BODY	1	BRASS	SILVER

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE: **UHF MALE CRIMP**

DRAWN BY:	DANIEL CAREY	DATE:	7/15/98
CHECKED BY:	JOHN COLE	DATE:	7/15/98
APPROVED BY:	JEFF MCVICKER	DATE:	7/15/98

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	1534	92N3380.DWG	B
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1