



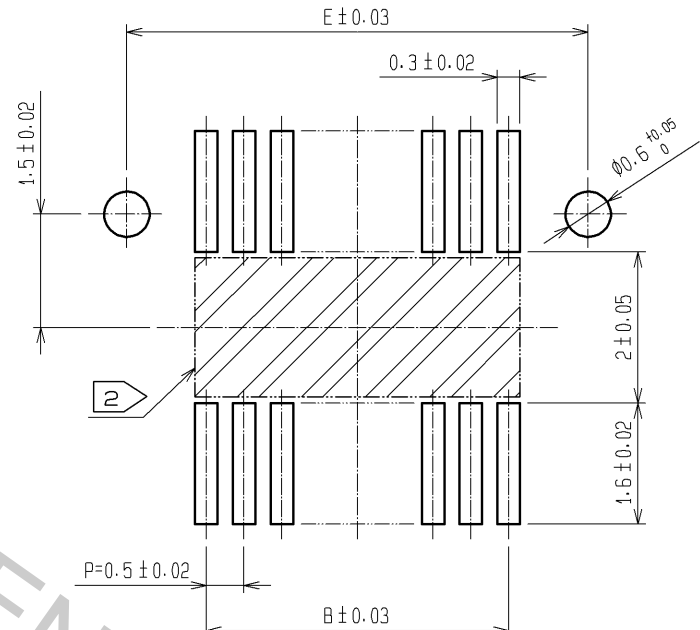




CODE No.	CONTACT	A	B	C	D	E	F
CL537-0626-9-81	10	4.6	2.0	2.7	3.1	4.1	2.8
CL537-0915-6-81	14	5.6	3.0	3.7	4.1	5.1	3.8
CL537-0628-4-81	20	7.1	4.5	5.2	5.6	6.6	5.3
CL537-0630-6-81	30	9.6	7.0	7.7	8.1	9.1	7.8
CL537-0637-5-81	32	10.1	7.5	8.2	8.6	9.6	8.3
CL537-0631-9-81	36	11.1	8.5	9.2	9.6	10.6	9.3
CL537-0632-1-81	40	12.1	9.5	10.2	10.6	11.6	10.3
CL537-0634-7-81	50	14.6	12.0	12.7	13.1	14.1	12.8
CL537-0636-2-81	60	17.1	14.5	15.2	15.6	16.6	15.3
CL537-0638-8-81	80	22.1	19.5	20.2	20.6	21.6	20.3

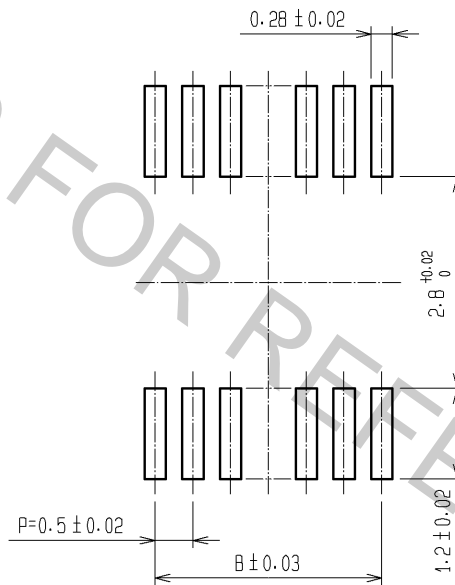

RECOMMENDED THICKNESS OF
SOLDER PASTE : 120 μm

NOTES 1 : LEAD CO-PLANARITY SHALL BE 0.08 mm MAX.

② IF THERE IS PATTERN ON ZZ PART, THERE IS A POSSIBILITY THAT IT WILL MAKE CONTACT WITH THE LEADS.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2#m min	5	PS	CLEAR (REINFORCEMENT COLLAR)					
		LEAD AREA:GOLD PLATED 0.015#m min	6	PS	BLACK (PLASTIC REEL)					
		OTHERS(UNDER PLATING):NICKEL PLATED 2#m min	4	POLYESTER	CLEAR (COVER TAPE)					
1	POLYAMIDE	UL94V-0,NATURAL(BEIGE)	3	PS	CLEAR (EMBOSSED CARRIER TAPE)					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA	13. 08. 06	DRAWING NO.	EDC3-163505-77					
		CHECKED : YH. MICHIDA	13. 08. 05	PART NO.	DF12A(3. 0)-*DS-0. 5V(81)					
		DESIGNED : YN. SAKAMOTO	13. 08. 05	CODE NO.	CL537					
		DRAWN : KR. AJITO	13. 08. 05	 1/2						

