






In case that the application demands a high level of reliability, such as automotive

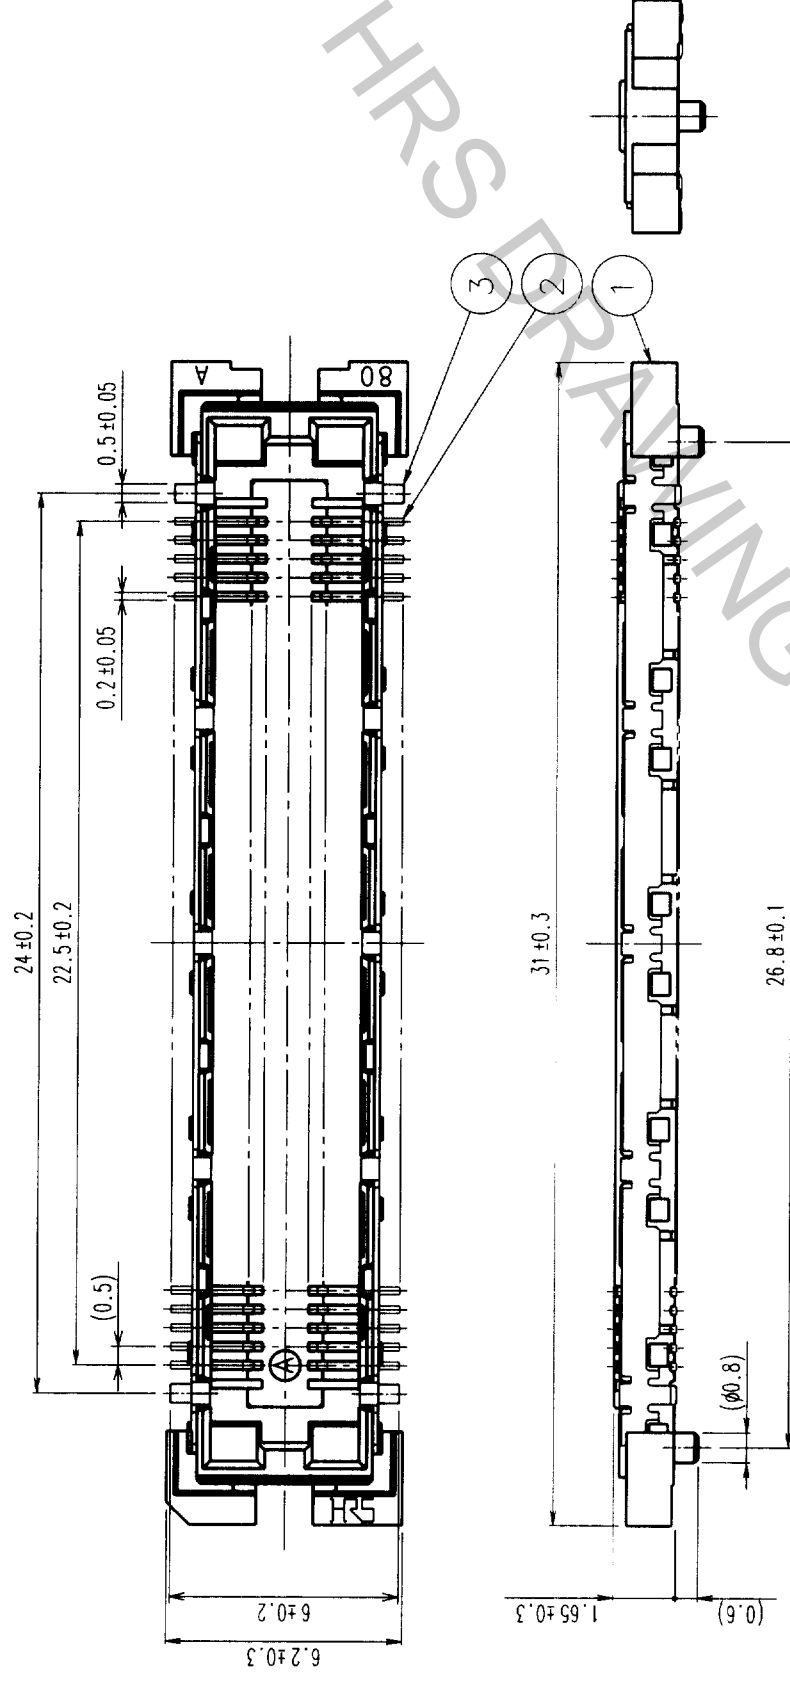


RECOMMENDED LAND PATTERN DIMENSION OF PCB

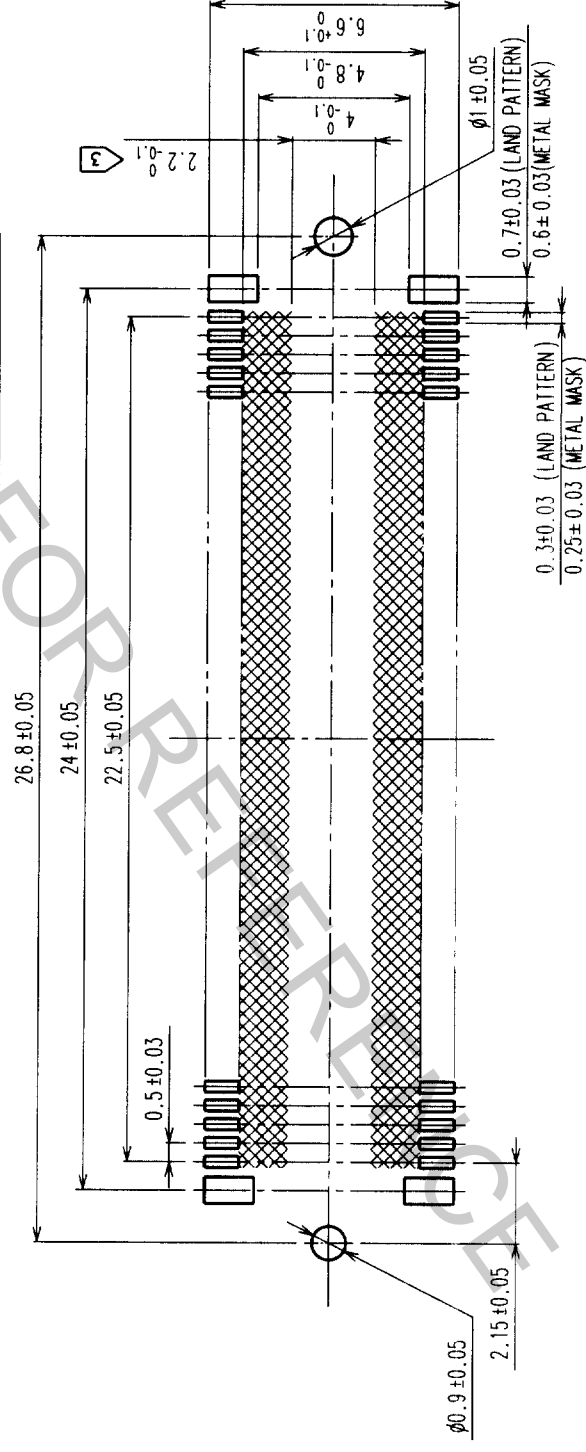

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 4 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1mm) OVER NICKEL	
1	LCP	LEAD: GOLD FLASH OVER NICKEL	
NO.	MATERIAL	BEIGE	UL94V-0
CODE NO. (OLD)	FINISH, REMARKS		
CL		DRAWING NO. 137.1c	
		DRAWING NO. EDC3-152117-01	
SCALE	5 : 1		
UNITS	mm	HIROSE ELECTRIC CO., LTD.	

TO	PCK			
----	-----	--	--	--



NOTES 1 1REEL:1000 CONNECTORS

3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING

TO	PCK			
----	-----	--	--	--