
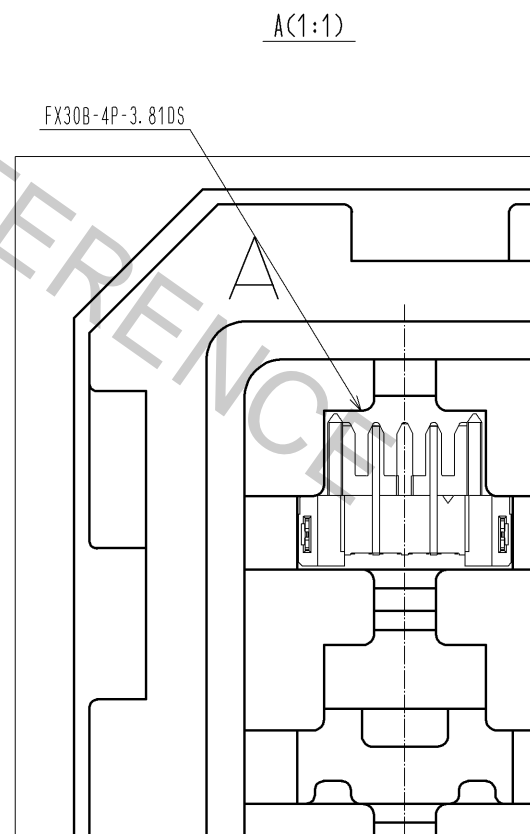
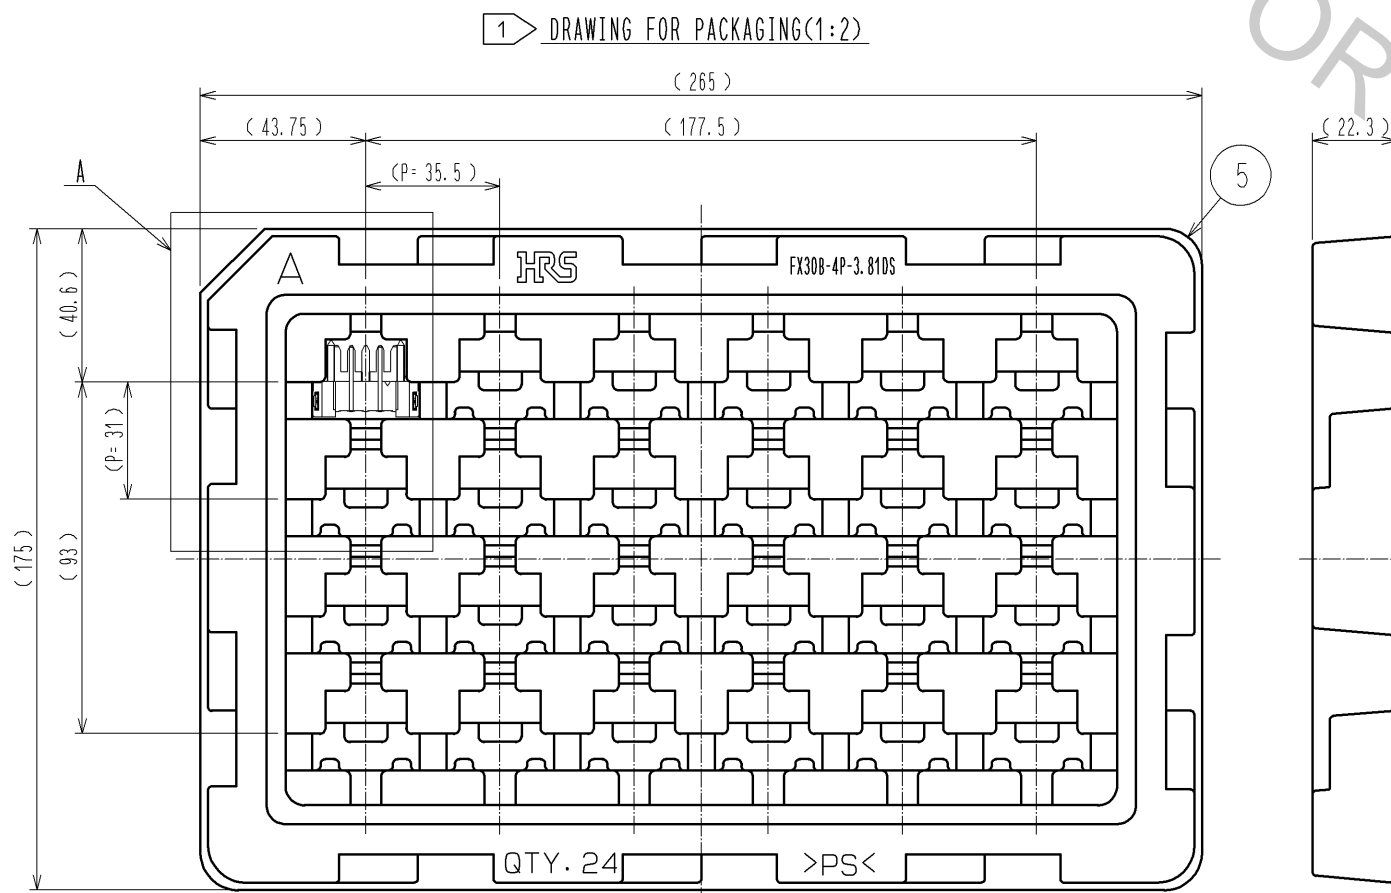


NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY.(24pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS
WHITCH DOSEN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL)
COMPOSE ONE LINE.
4 MISALIGNMENT ABSORBING RANGE:±0.3mm max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.
7 PAY ATTENTION TO THE RECOMMENDED PCB THICKNESS AND FINISHED THROUGH-HOLE DIMENSIONS.
LOW RETENTION FORCE TO PCB COULD INDUCE ANGLED MOUNTING DUE TO THE UNBALANCED CENTER
OF THE CONNECTOR.

			5	POLYSTYRENE	
2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm	4	PHOSPHOR BRONZE	TIN-PLATING 3.0 μm
		LEAD AREA:TIN-PLATING 1.0 μm			UNDER PLATING:NICKEL 1.0 μm
		UNDER PLATING:NICKEL 1.0 μm	3	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm
1	POLYAMIDE	BLACK UL94V-0			LEAD AREA:TIN-PLATING 1.0 μm
NO. MATERIAL		FINISH , REMARKS	NO. MATERIAL		FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT		DESCRIPTION OF REVISIONS
					DESIGNED
					CHECKED
					DATE
					DRAWING NO.
					EDC3-347270-00
					PART NO.
					FX30B-4P-3.81DS
					CODE NO.
					CL570-3402-2-00
					1/2

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

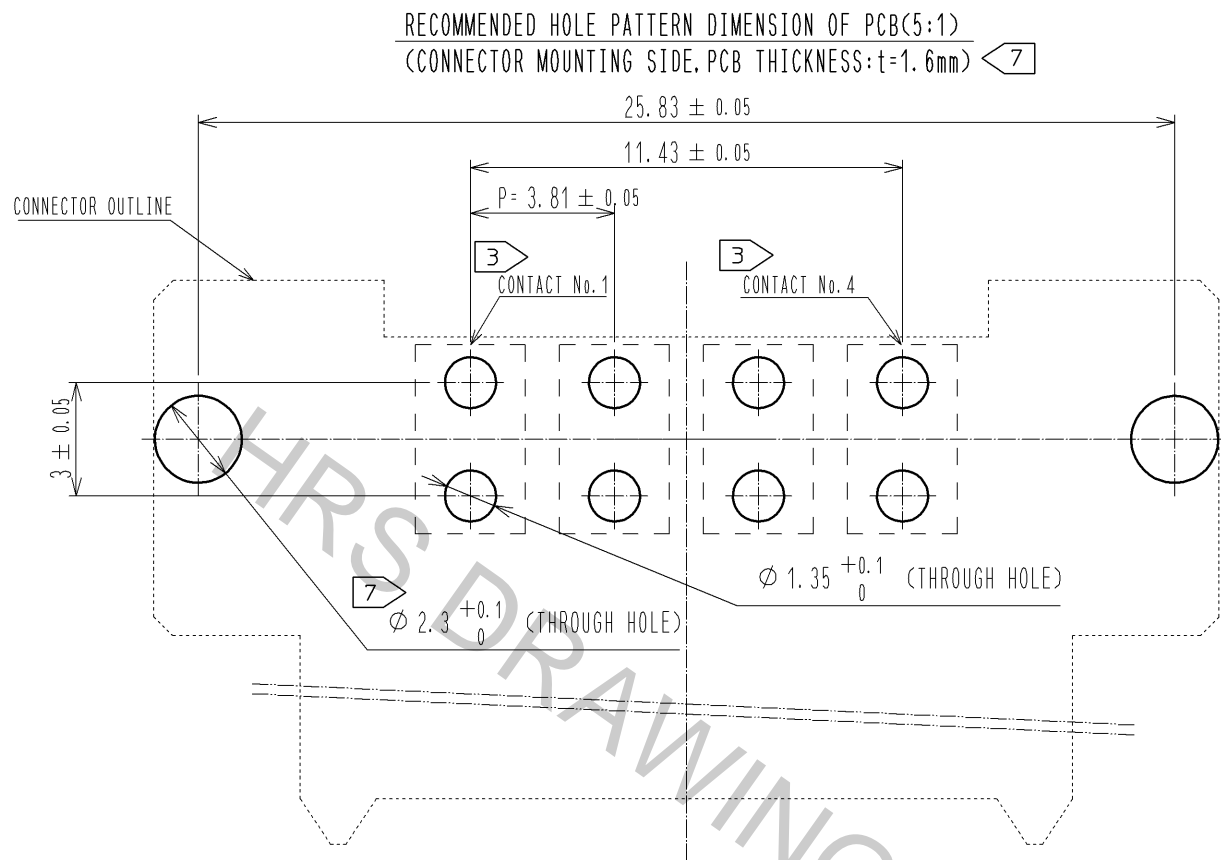

HRS

DRAWING NO.	EDC3-347270-00
PART NO.	FX30B-4P-3.81DS
CODE NO.	CL570-3402-2-00

2/2