
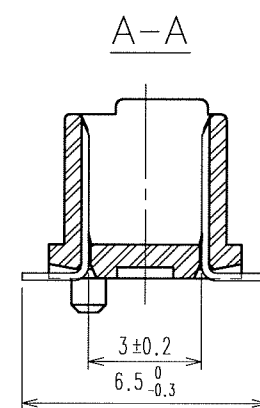
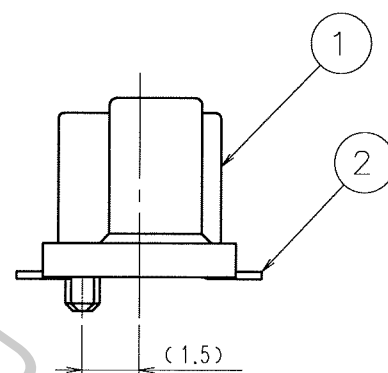



TO
PCK



NOTE. 1 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK
MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	POLYPHENYLENE SULFIDE	LIGHT BROWN UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μ m min.		
					LEAD AREA:GOLD PLATING FLASH		
					UNDER PLATING:NICKEL 1μ m min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			A.SUZUKAWA 05.11.05	M. Doi '05.11.09	M. Ogawa '05.11.09	H. Okawa '05.11.09	
		DRAWING NO. EDC3-150823-25		PART NO. FX8C-100P-SV(71)			
SCALE 5 : 1		 HIROSE ELECTRIC CO.,LTD.		CODE NO. CL578-0505-0-71			1/1
UNITS mm							