



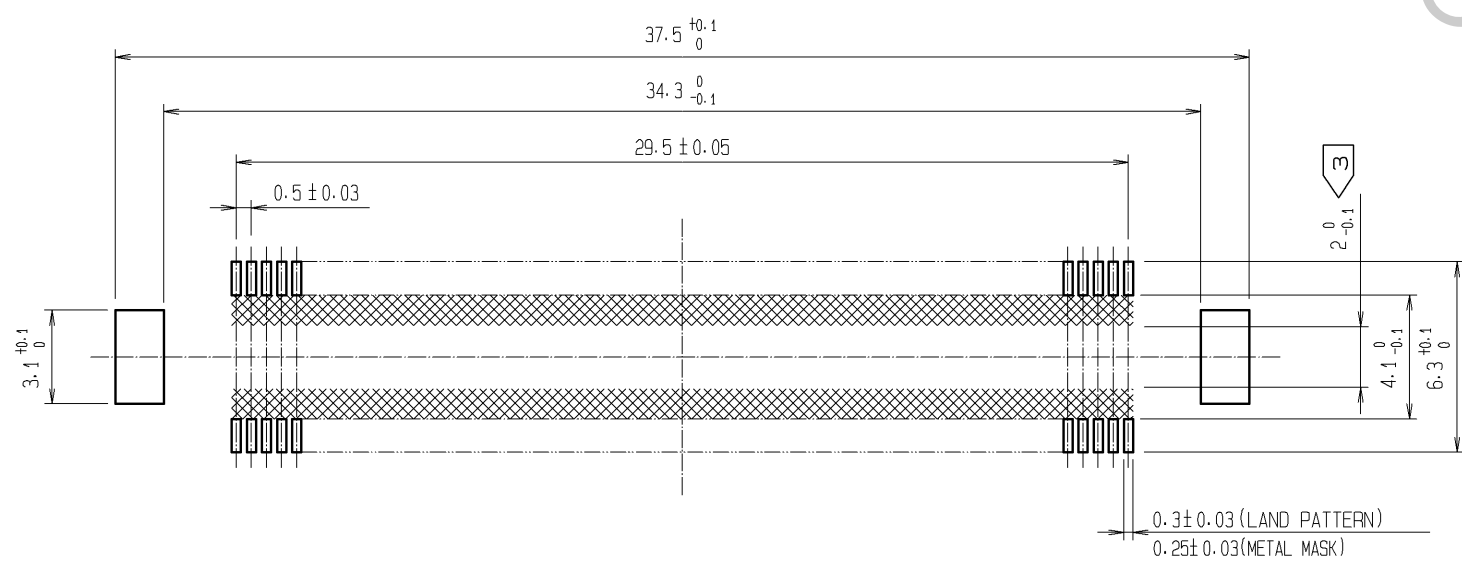


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)



- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ③ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

					3	PHOSPHOR BRONZE	TIN-PLATING					
					2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.					
							LEAD AREA:TIN-PLATING 1μm min.					
							UNDER PLATING:NICKEL 1μm min.					
1	LCP		BEIGE		UL94V-0							
NO.	MATERIAL		FINISH .		REMARKS		NO.	MATERIAL	FINISH .		REMARKS	
UNITS		SCALE		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE
mm		4 : 1										
 HIROSE ELECTRIC CO., LTD.			APPROVED :HS. OKAWA		09. 04. 14		DRAWING NO.		EDC3-151973-25			
			CHECED :HT. YAMAGUCHI		09. 04. 14		PART NO.		FX10B-120P-SV1(71)			
			DESIGNED :SY. KAMIGA		09. 04. 14		CODE NO.		CL570-0152-0-71			
			DRAWN :HK. SUNADORI		09. 04. 13				 1/1			