
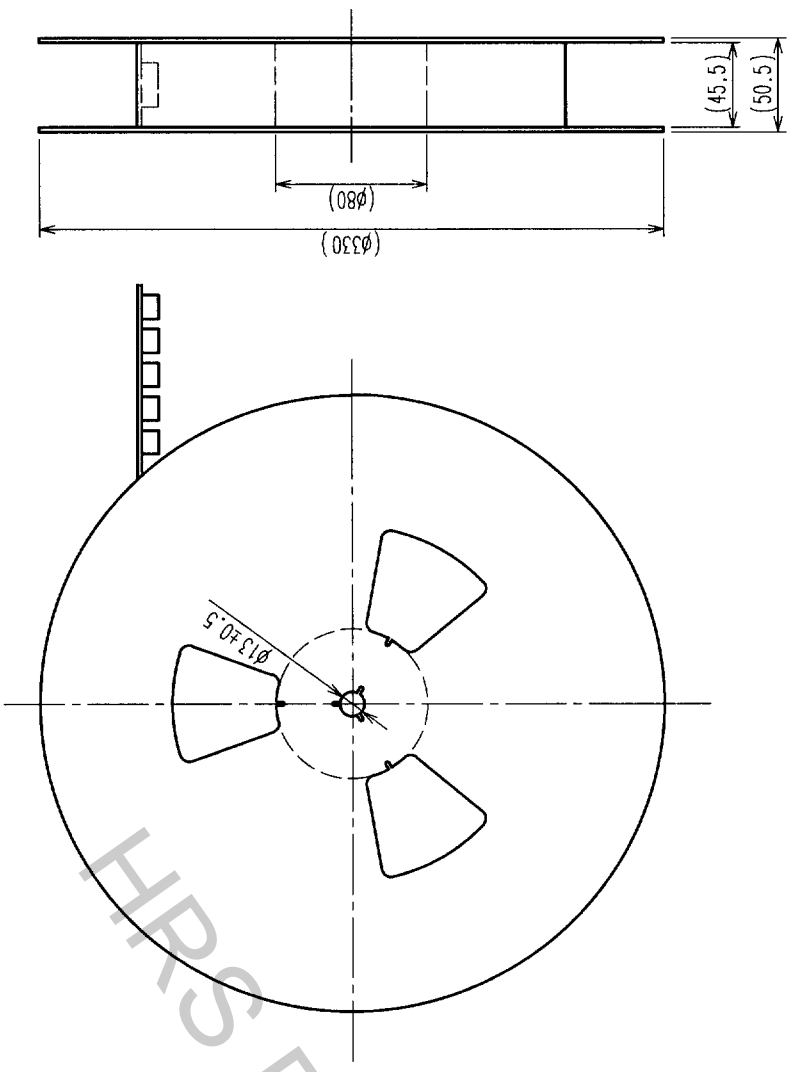



3 In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

| COUNT | | DESCRIPTION OF REVISIONS | | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | | BY | CHKD | DATE |
|-------|---|--------------------------|--|----|------|------|-------|--------------------------|--|----|------|------|
| △ | △ | | | | | | △ | | | | | |
| △ | △ | | | | | | △ | | | | | |
| △ | △ | | | | | | △ | | | | | |

REELED DIMENSION (Free)

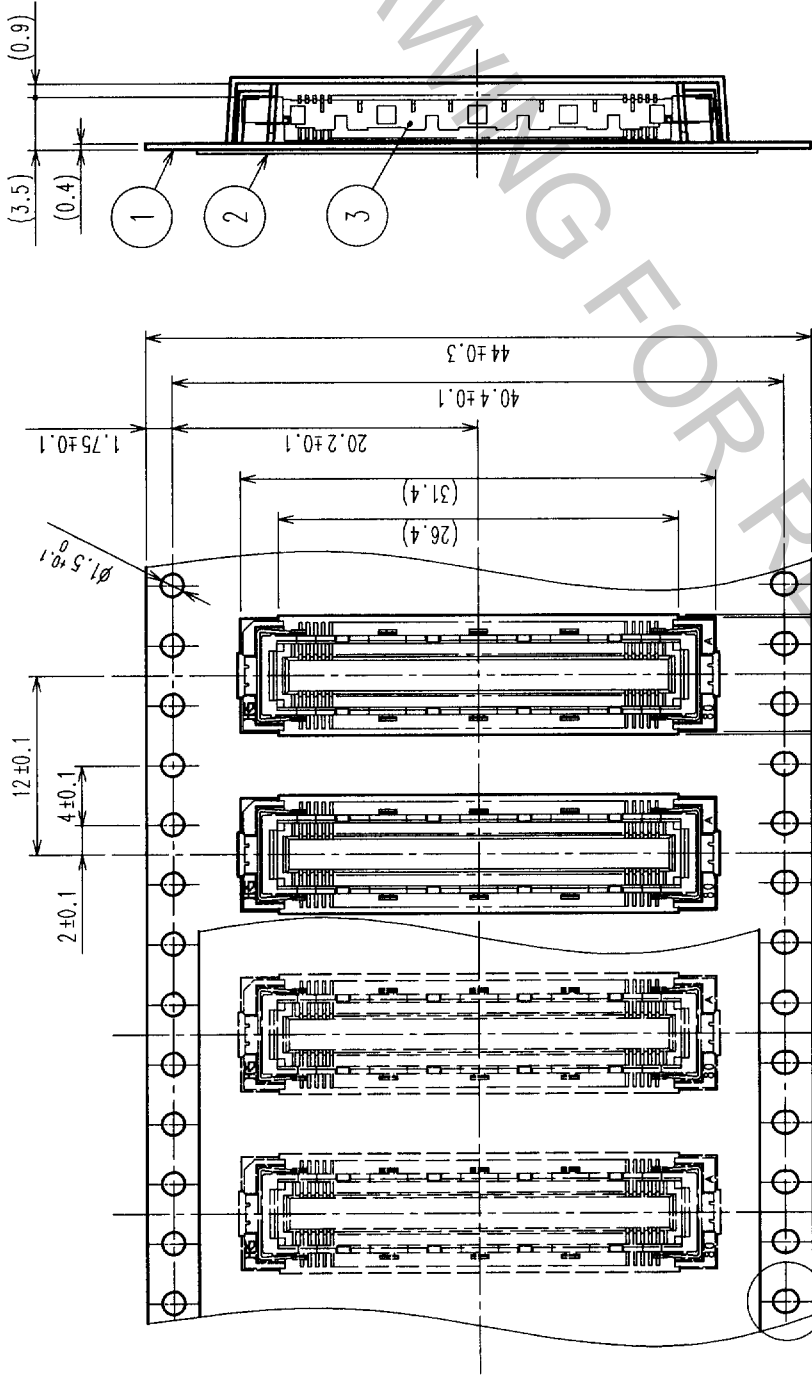

- NOTES
- 1 REEL:1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.

| | | | | | | | | | | | |
|---|--|-------------|--|------------------------|--|------------------------|--|--------------------------|--|--------------------------|--|
| 2 | | PET | | TOP COVER TAPE | | | | | | | |
| 1 | | PS | | EMBOSSED CARRIER TAPE | | | | 3 | | (CONNECTOR) | |
| NO. | | MATERIAL | | FINISH, REMARKS | | | | NO. | | MATERIAL | |
| CODE NO. (OLD) | | CL | | DRAWN | | DESIGNED | | CHECKED | | APPROVED | |
| | | | | J. Nakachi 00.01.07 | | J. Nishida 02.01.07 | | M. Sakata 00.01.11 | | J. Yoshimura 00.01.11 | |
| DRAWING FOR PACKING | | | | | | | | | | | |
|  | | DRAWING NO. | | EDC3-151988-01 | | | | PART NO. | | FX10B-96S-SV(21) | |
| SCALE | | | | | | | | | | | |
| 2 : 1 | | | | | | | | | | | |
| UNITS | | | | | | | | CODE NO. | | CL570-0251-2-21 | |
| mm | | | | HRS | | | | HIROSE ELECTRIC CO., LTD | | | |
| | | | | | | | | | | 2 | |