


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES :

1. UL LISTED AND CSA CERTIFIED AFTER HEAT SHRINKING FOR:
 - A. 600 V MAX. VOLTAGE RATING
 - B. TEMPERATURE RATING OF INSULATION:
125°C (257°F)
 - C. STRANDED COPPER WIRE ONLY (SEE CHART FOR WIRE RANGE)
2. MATERIAL :
 - A. CONNECTOR - TIN PLATED COPPER TUBE, BRAZED SEAM BSH10 ONLY
 - B. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL.
DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. INSTALLATION TOOL: CT-310
6. WIRE STRIP LENGTH: 5/16 ^{+1/16}/₀
7. PACKAGE QTY: STD. PKG.-Q=25 (QTY.-E=20 FOR BSH10)
BULK PKG.-D=500 (QTY.-T=200 FOR BSH10)

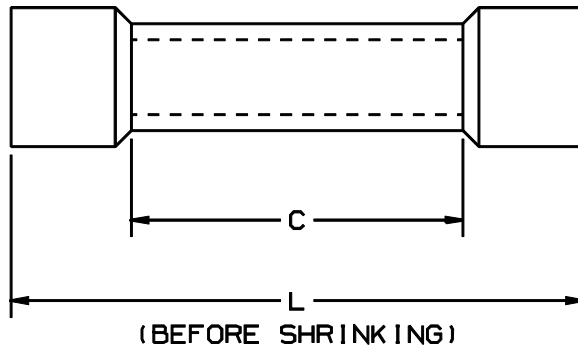

PANDUIT PART NUMBER	PK	WIRE RANGE (AWG)	DIMENSIONS		MAX WIRE INSULATION DIA	INSULATION COLOR
			C	L		
BSH18	-D -Q	22-18	.58 (14,7)	1.45 (36,8)	.170 (4,32)	RED
BSH14	-D -Q	16-14	.58 (14,7)	1.45 (36,8)	.190 (4,83)	BLUE
BSH10	-E -T	12-10	.74 (18,8)	1.64 (41,7)	.240 (6,10)	YELLOW




LISTED
12DO



CERTIFIED
73971

A41454_02

								 PANDUIT CORP.			
								TINLEY PARK, ILLINOIS			
02	2/01	EJS		ADDED PACKAGE CODE TO CHART. FILE SPEC WAS N41454AA_PCD_01. ADDED "BRAZED SEAM BSH10 ONLY" TO NOTE 2-A				HEAT SHRINK INSULATED BUTT SPLICES			
01	8/95	MC	RS	UPDATED NOTES	03489	LA	JMO				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	APP	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								DRL	RLS	NONE	A41454