




Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

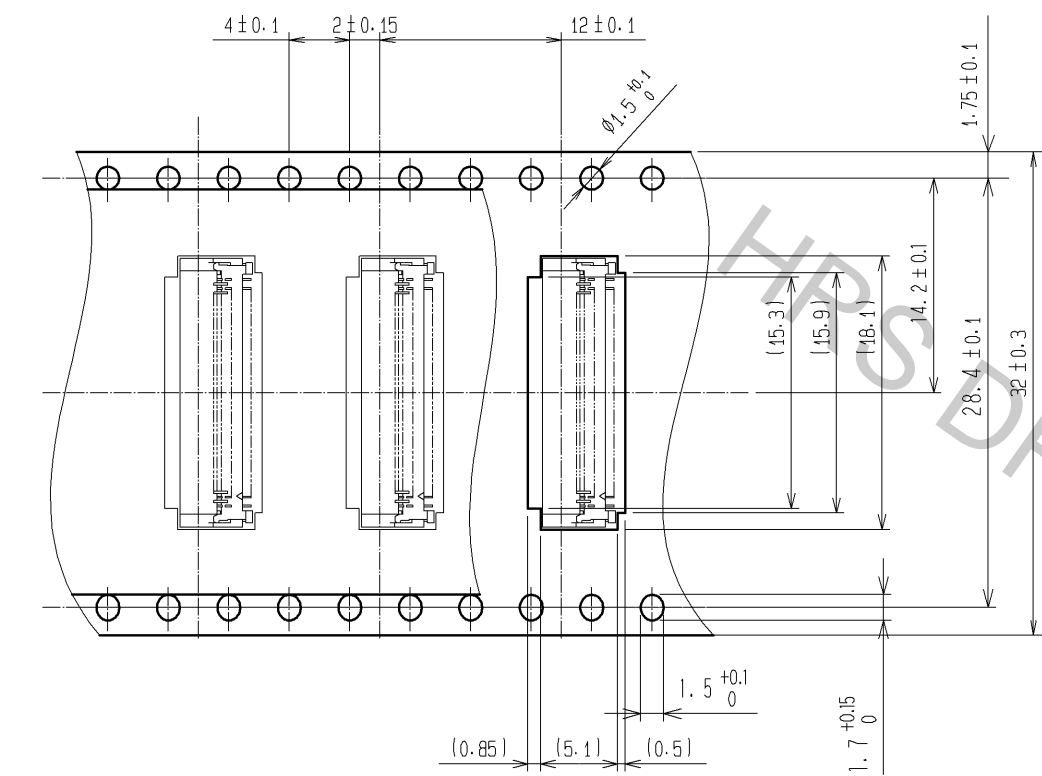

→
DIRECTION OF UNREELING

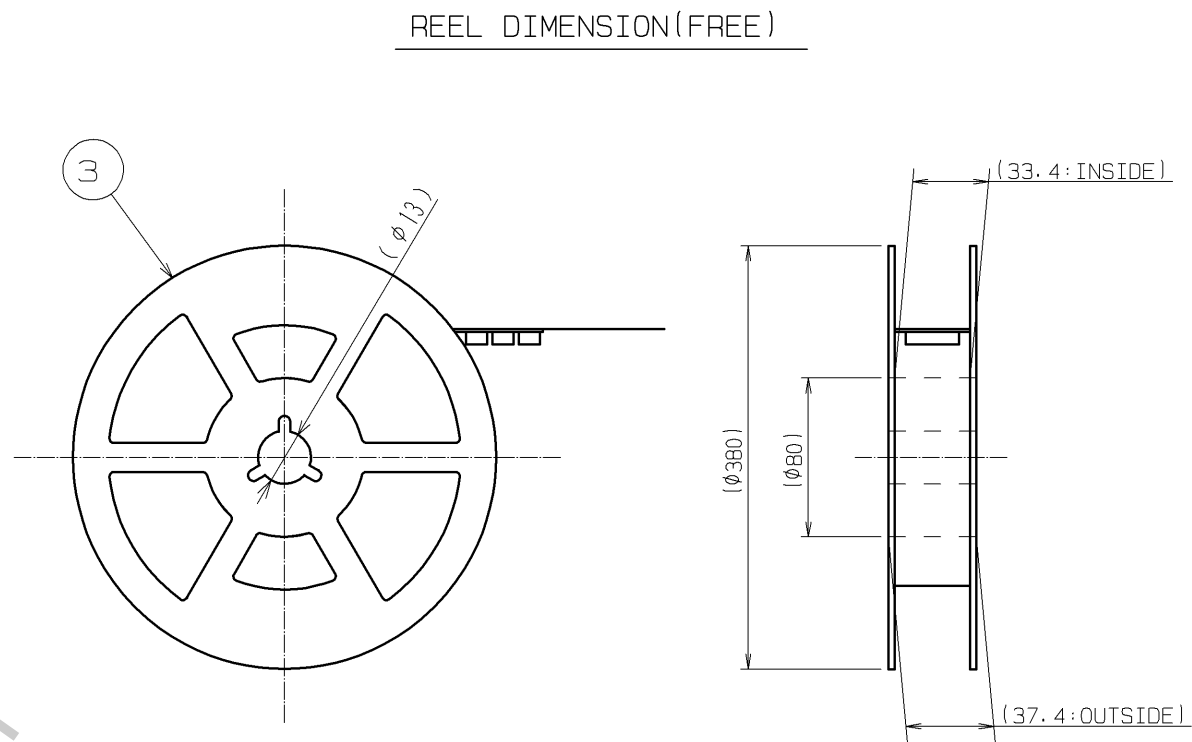

- NOTE 1 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2 PER REEL : 2500 CONNECTORS.
3 COMPLIANT TO JIS C 0806 (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING.)

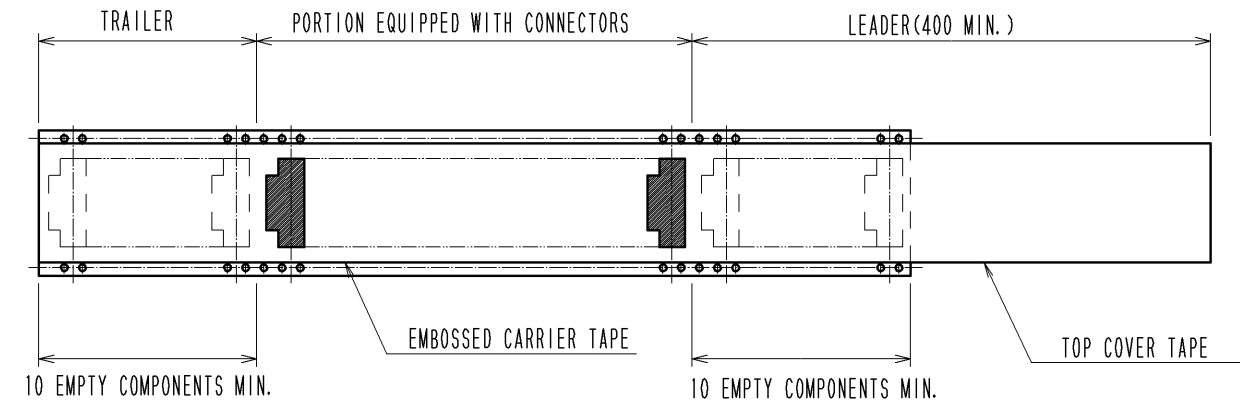

2	POLYESTER		4	(CONNECTOR)	
1	POLYSTYRENE		3	POLYSTYRENE	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	07. 07. 17	DRAWING NO.	EDC3-153687-01
		CHECED : TH. MURAI	07. 07. 17	PART NO.	FH23-51S-0.3SHAW(06)
		DESIGNED : TO. SHIBUYA	07. 07. 13	CODE NO.	CL586-1313-9-06
		DRAWN : WR. YAMADA	07. 07. 09		