



適用FPC/FFC推奨寸法  
APPLICABLE FPC/FFC  
RECOMMENDED DIMENSION

( ): FFCに適用  
( ): APPLY TO FFC

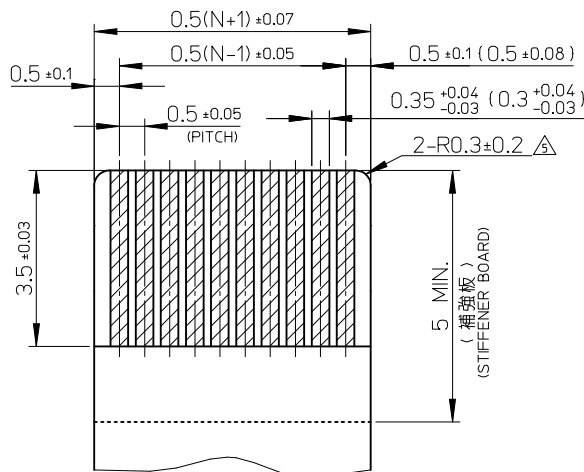

耳無し適用FPC/FFC推奨寸法  
APPLICABLE NON-TAB FPC/FFC  
RECOMMENDED DIMENSION

( ): FFCに適用  
( ): APPLY TO FFC

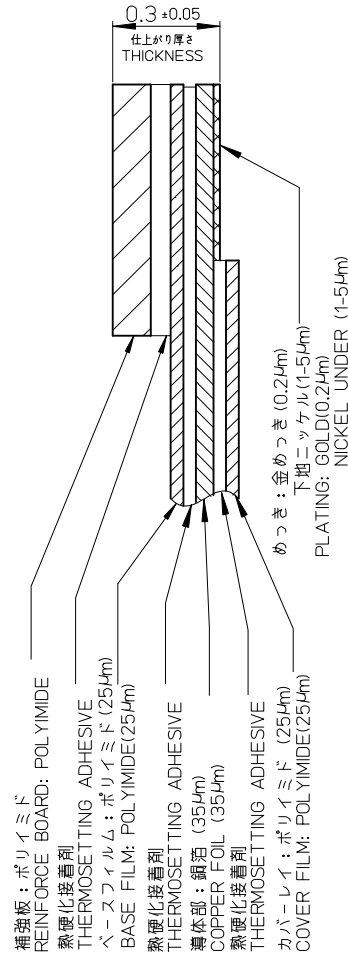

FPC構成推奨仕様  
STRUCTURE OF FPC

## FPC/FFCについて ABOUT FPC/FFC

打ち抜き方向は導体側から補強板側を推奨します。  
導体部については軟箔銅 $35\mu\text{m}$ または $50\mu\text{m}$ を推奨します。  
FFCに規定された定格温度がFFC単体前提である場合が御座います。  
コネクタと組み合わせての実使用に置いて、接着層が劣化するなどの信頼性を満足できないケースを回避するため、  
実機での評価/確認をお願い致します。

RECOMMENDED PUNCHING DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER SIDE

RECOMMENDED CONDUCTOR SPEC: SOFT COPPER FOIL

RECOMMENDED CONDUCTOR THICKNESS: 35 MICROMETER OR 50 MICROMETER

NOTE: WHEN ACTUALLY USING IT WITH CONNECTOR, PLEASE DO THE EVALUATION AND THE CONFIRMATION WITH AN ACTUAL EQUIPMENT TO EVADE THE CASE WHERE RELIABILITY CANNOT BE FILLED (THE ADHESIVE LINE OF FFC IS DETERIORATED ETC.)

## FPCについて ABOUT FPC

補強フィルム材質はポリイミドを推奨します。ベースフィルムは $25\mu\text{m}$ を推奨します。

接着剤は熱硬化接着剤を推奨します。

尚、接着剤の接点部への付着は導通不良の原因になりますので、染み出しが無い様お願い致します。


RECOMMENDED MATERIAL/THICKNESS.

RECOMMENDED STIFFENER MATERIAL: POLYIMIDE

RECOMMENDED BASE FILM THICKNESS: 25 MICROMETER

RECOMMENDED ADHESIVE: THERMOSETTING ADHESIVE

NOTE: PLEASE PUT APPROPRIATE AMOUNT OF ADHESIVE ON ADHEREND BECAUSE THERE IS A POSSIBILITY THAT THE EXTRA ADHESIVE CAUSES THE DEFECT IN ELECTRICAL CONTINUITY. THERE IS A POSSIBILITY THAT THE PRESCRIPT TEMPERATURE OF FFC IS SET TO SINGLE IT.

SEE SHEET 1 EC NO: J2017-0308 DRAWN: JASUNUMA 2016/12/06 CHKD: YKOBAYASHI 10/22/2016/12/06 APPR: TKUSUJARA01 2016/12/07	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		0.25 UNDER	± 0.03	DRAWN BY	DATE	TITLE 0.5 FPC CONN ZIF E/O 2 CONTACTS TYPE HSG ASSY (H=1.9)			
		0.25 OVER 0.5 UNDER	± 0.05	JASUNUMA	2014/02/25				
		0.5 OVER 1.0 UNDER	± 0.1	CHECKED BY	DATE				
		1.0 OVER 10 UNDER	± 0.2	KTAKAHASHI	2014/07/28				
		10 OVER 30 UNDER	± 0.25	APPROVED BY	DATE				
		30 OVER	± 0.3	YNOGAWA	2014/11/10				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.			SHEET NO.
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE SHEET 3				SD-505110-001		2 OF 3
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F


E

D

C


B

A


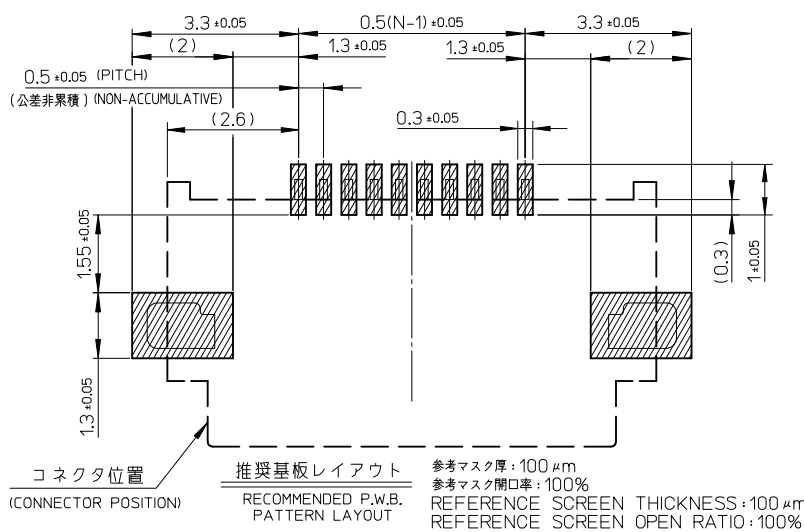


43.1	39.5	44.7	505110-8091	80
38.1	34.5	39.7	505110-7091	70
37.1	33.5	38.7	505110-6891	68
35.1	31.5	36.7	505110-6491	64
33.1	29.5	34.7	505110-6091	60
28.1	24.5	29.7	505110-5091	50
25.6	22.0	27.2	505110-4591	45
23.1	19.5	24.7	505110-4091	40
20.6	17	22.2	505110-3591	35
18.1	14.5	19.7	505110-3091	30
17.1	13.5	18.7	505110-2891	28
16.1	12.5	17.7	505110-2691	26
15.1	11.5	16.7	505110-2491	24
14.1	10.5	15.7	505110-2291	22
13.1	9.5	14.7	505110-2091	20

CONNECTOR SERIES NO. 505110-\*\*11


SEE SHEET 1 EC NO.: J2017-0308 DRWN: JASUNUMA 2016/12/06 CHKD: YKOBAYASHI 2016/12/06 APPR: TKUSUHARA01 2016/12/07	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		0.25 UNDER ± 0.03			DRAWN BY	DATE	TITLE 0.5 FPC CONN ZIF E/O 2 CONTACTS TYPE HSG ASSY (H=1.9)  <b>molex</b>			
		0.25 OVER 0.5 UNDER ± 0.05			JASUNUMA	2014/02/25				
		0.5 OVER 1.0 UNDER ± 0.1			CHECKED BY	DATE				
		1.0 OVER 10 UNDER ± 0.2			KTAKAHASHI	2014/07/28				
		10 OVER 30 UNDER ± 0.25			APPROVED BY	DATE				
		30 OVER ± 0.3			YNOGAWA	2014/11/10	DOCUMENT NO. SD-505110-001			SHEET NO. 3 OF 3
		ANGULAR ±1 °			MATERIAL NO.					
		REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART			
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

引き出し方向  
PULL OUT  
DIRECTION

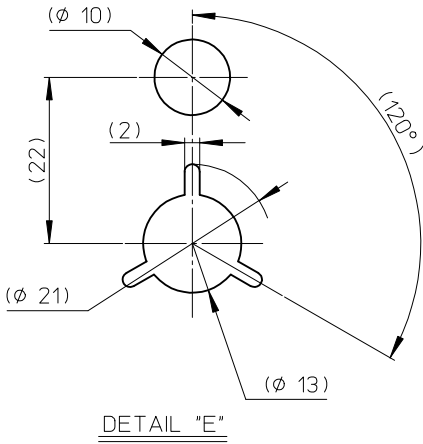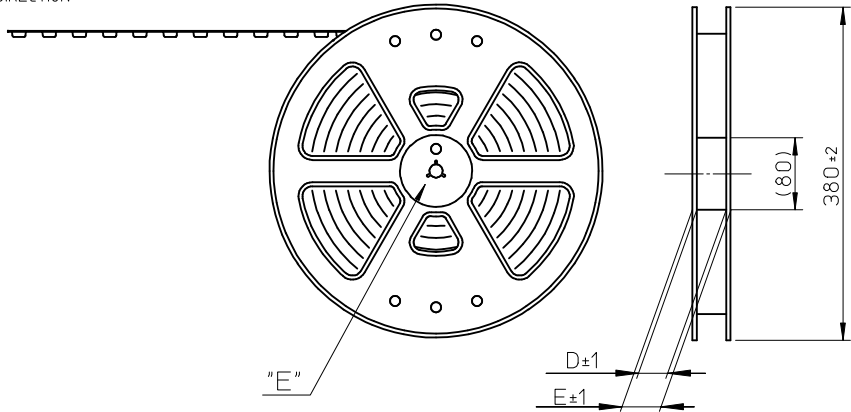

NOTES

1. 梱包数量 : 3000個/リール  
NUMBER OF CONNECTORS : 3000PIECES/REEL
2. リードテープ長さ  
LEAD TAPE LENGTH

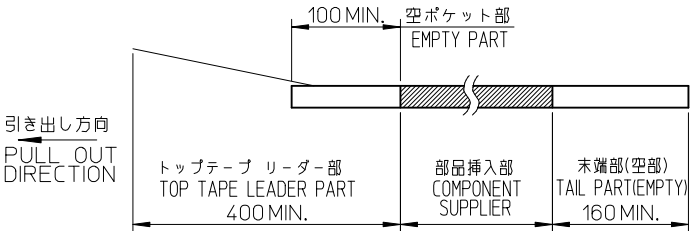

3. カバーテープの剥離強度については、IEC60286-3に準拠  
COVER TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.
4. 製品詳細寸法については図面 SD-505110-001を参照下さい。  
FOR DIMENSIONS OF PRODUCT, REFER TO SD-505110-001.
5. 材料 MATERIAL  
キャリアテープ : ポリスチレン  
CARRIER TAPE : POLYSTYRENE  
トップテープ : ポリエチレンテレフタレート, ポリエチレン  
TOP TAPE : POLYETHYLENE TEREPHTHALATE , POLYETHYLENE  
リール : ポリスチレン<リサイクル材を含む>  
REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>
6. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT

REVISED	EC NO.: J2015-1582	2015/05/28 2015/05/29 2015/05/29 2015/06/26	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
				0.25	UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 0.5 FPC CONN ZIF E/O 2 CONTACTS TYPE EMBSTP PACKAGE (H=1.9)  <b>molex</b>					
				0.25	OVER	0.5	UNDER	± 0.05	JASANUMA						2014/02/25
				0.5	OVER	1.0	UNDER	± 0.1	CHECKED BY						DATE
				1.0	OVER	10	UNDER	± 0.2	KTAKAHASHI						2014/07/30
				10	OVER	30	UNDER	± 0.25	APPROVED BY						DATE
				30	OVER		± 0.3	YNOGAWA	2014/11/10	DOCUMENT NO. SD-505110-002					
				ANGULAR			±1 °	MATERIAL NO.							SHEET NO.
								SEE SHEET 2		1 OF 2					
</															

F

E

D

C

B

A

F




E

D

C

B

A

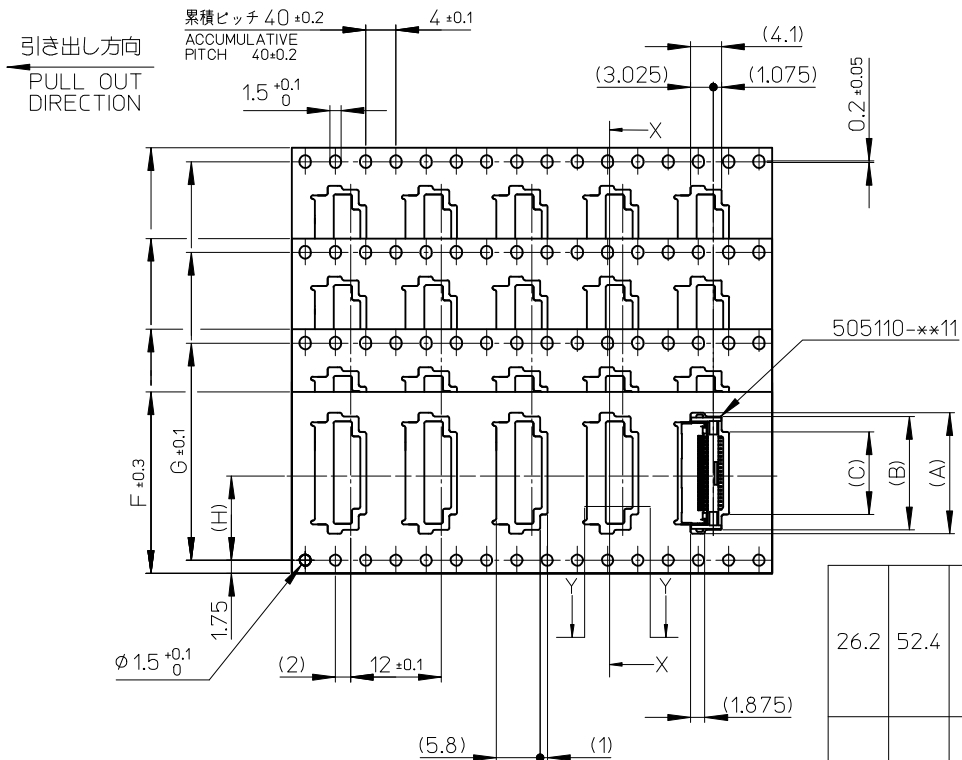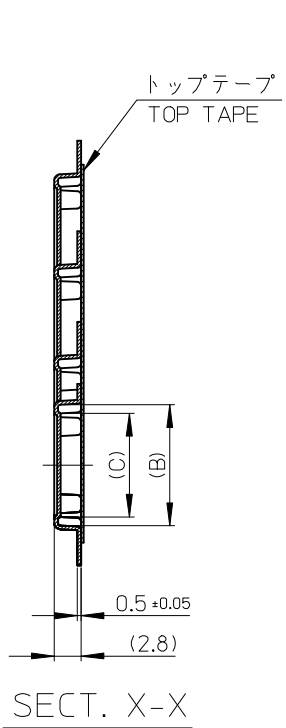

26.2	52.4	56	61.4	57.4	40.9	44.9	46	505110-8091	80
					35.9	39.9	41	505110-7091	70
					34.9	38.9	40	505110-6891	68
					32.9	36.9	38	505110-6491	64
					30.9	34.9	36	505110-6091	60
20.2	40.4	44	49.4	45.4	25.9	29.9	31	505110-5091	50
					23.4	27.4	28.5	505110-4591	45
					20.9	24.9	26	505110-4091	40
					18.4	22.4	23.5	505110-3591	35
					15.9	19.9	21	505110-3091	30
14.2	28.4	32	37.4	33.4	14.9	18.9	20	505110-2891	28
					13.9	17.9	19	505110-2691	26
					12.9	16.9	18	505110-2491	24
					11.9	15.9	17	505110-2291	22
					11.5	---	16	505110-2091	20
H	G	F	E	D	C	B	A	EMBOSSED PACKAGE	
オーダー番号 ORDER NO.								Ckt	

CONNECTOR SERIES NO. 505110-\*\*11

SEE SHEET 1  
EC NO.: J2015-1582  
DRWN:KONDO 2015/05/28  
CHKD:KATAHASHI 2015/05/29  
APPR:KMORI KAWA 2015/06/26

DESCRIPTION

REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

DIMENSION STYLE  
MM ONLY

SCALE  
---

DESIGN UNITS  
METRIC

THIRD ANGLE PROJECTION

0.25 UNDER UNDER ±0.03  
0.25 OVER 0.5 UNDER ±0.05  
0.5 OVER 1.0 UNDER ±0.1  
1.0 OVER 10 UNDER ±0.2  
10 OVER 30 UNDER ±0.25  
30 OVER ±0.3  
ANGULAR ±1 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRAWN BY  
JASANUMA 2014/02/25  
CHECKED BY  
KATAHASHI 2014/07/30  
APPROVED BY  
YNOGAWA 2014/11/10  
MATERIAL NO.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

0.5 FPC CONN ZIF E/O  
2 CONTACTS TYPE  
EMBSTP PACKAGE (H=1.9)

**molex**

SD-505110-002

2 OF 2