






ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1789	A	Released	DCM	5/10/07				



Cover Material
ABS Compound UL94-HB - Nickel Plated

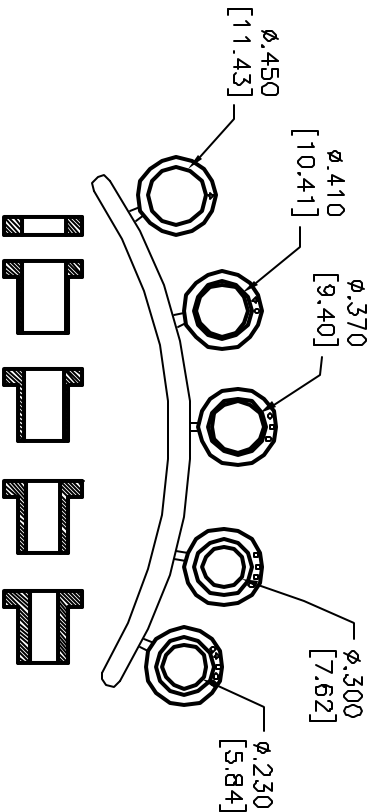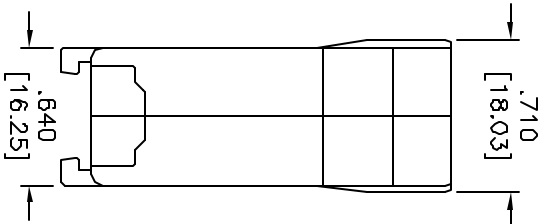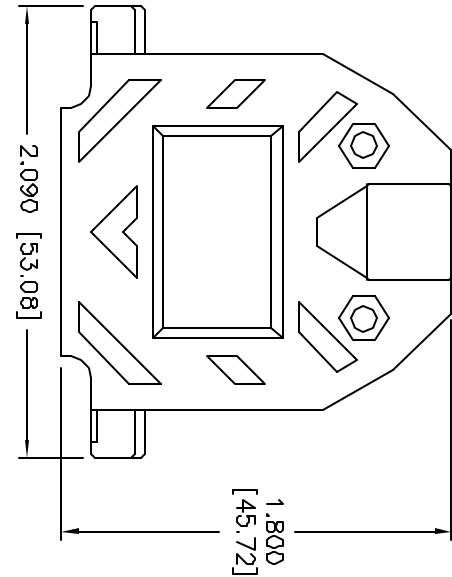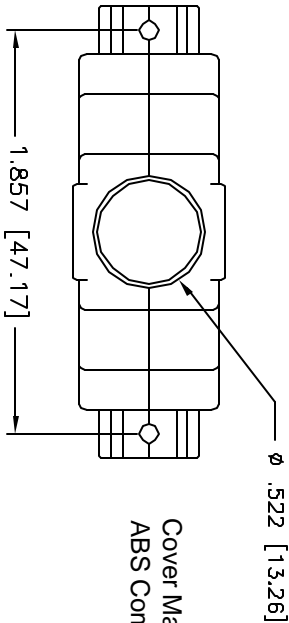


Compression Inserts
- Material: Thermoplastic, Black
- Durometer: 75 ±5 Type A per ASTM D2240



#4-40, #2 Blank Hex Nut,
Steel, Zinc Plated (Hexavalent
Chromium Free)
(2 pcs)

(2 pcs)

#4-40 x 1/2", Fillister Head
Caprive Screw, Steel, Zinc Plated
(Hexavalent Chromium Free)
(2 pcs)



#4-40 x 7/6", Fillister Head Machine
Screw, Steel, Zinc Plated
(Hexavalent Chromium Free)
(2 pcs)

TOLERANCES:

DRAWN BY:

DATE:

DRAWING TITLE:

Two Piece, Metalized Plastic, D-Sub Cover, 25 Pin

CHECKED BY:

DATE:

SIZE

DWG. NO.

ELECTRONIC FILE

REV

DRAWN BY:

DATE:

SIZE

DWG. NO.

ELECTRONIC FILE

REV

UNLESS OTHERWISE
SPECIFIED, DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

APPROVED BY:

DATE:

SCALE:

NTS

U.O.M.: INCHES [mm]

SHEET:

1 OF 1

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.