


COMMENT: ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY. AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

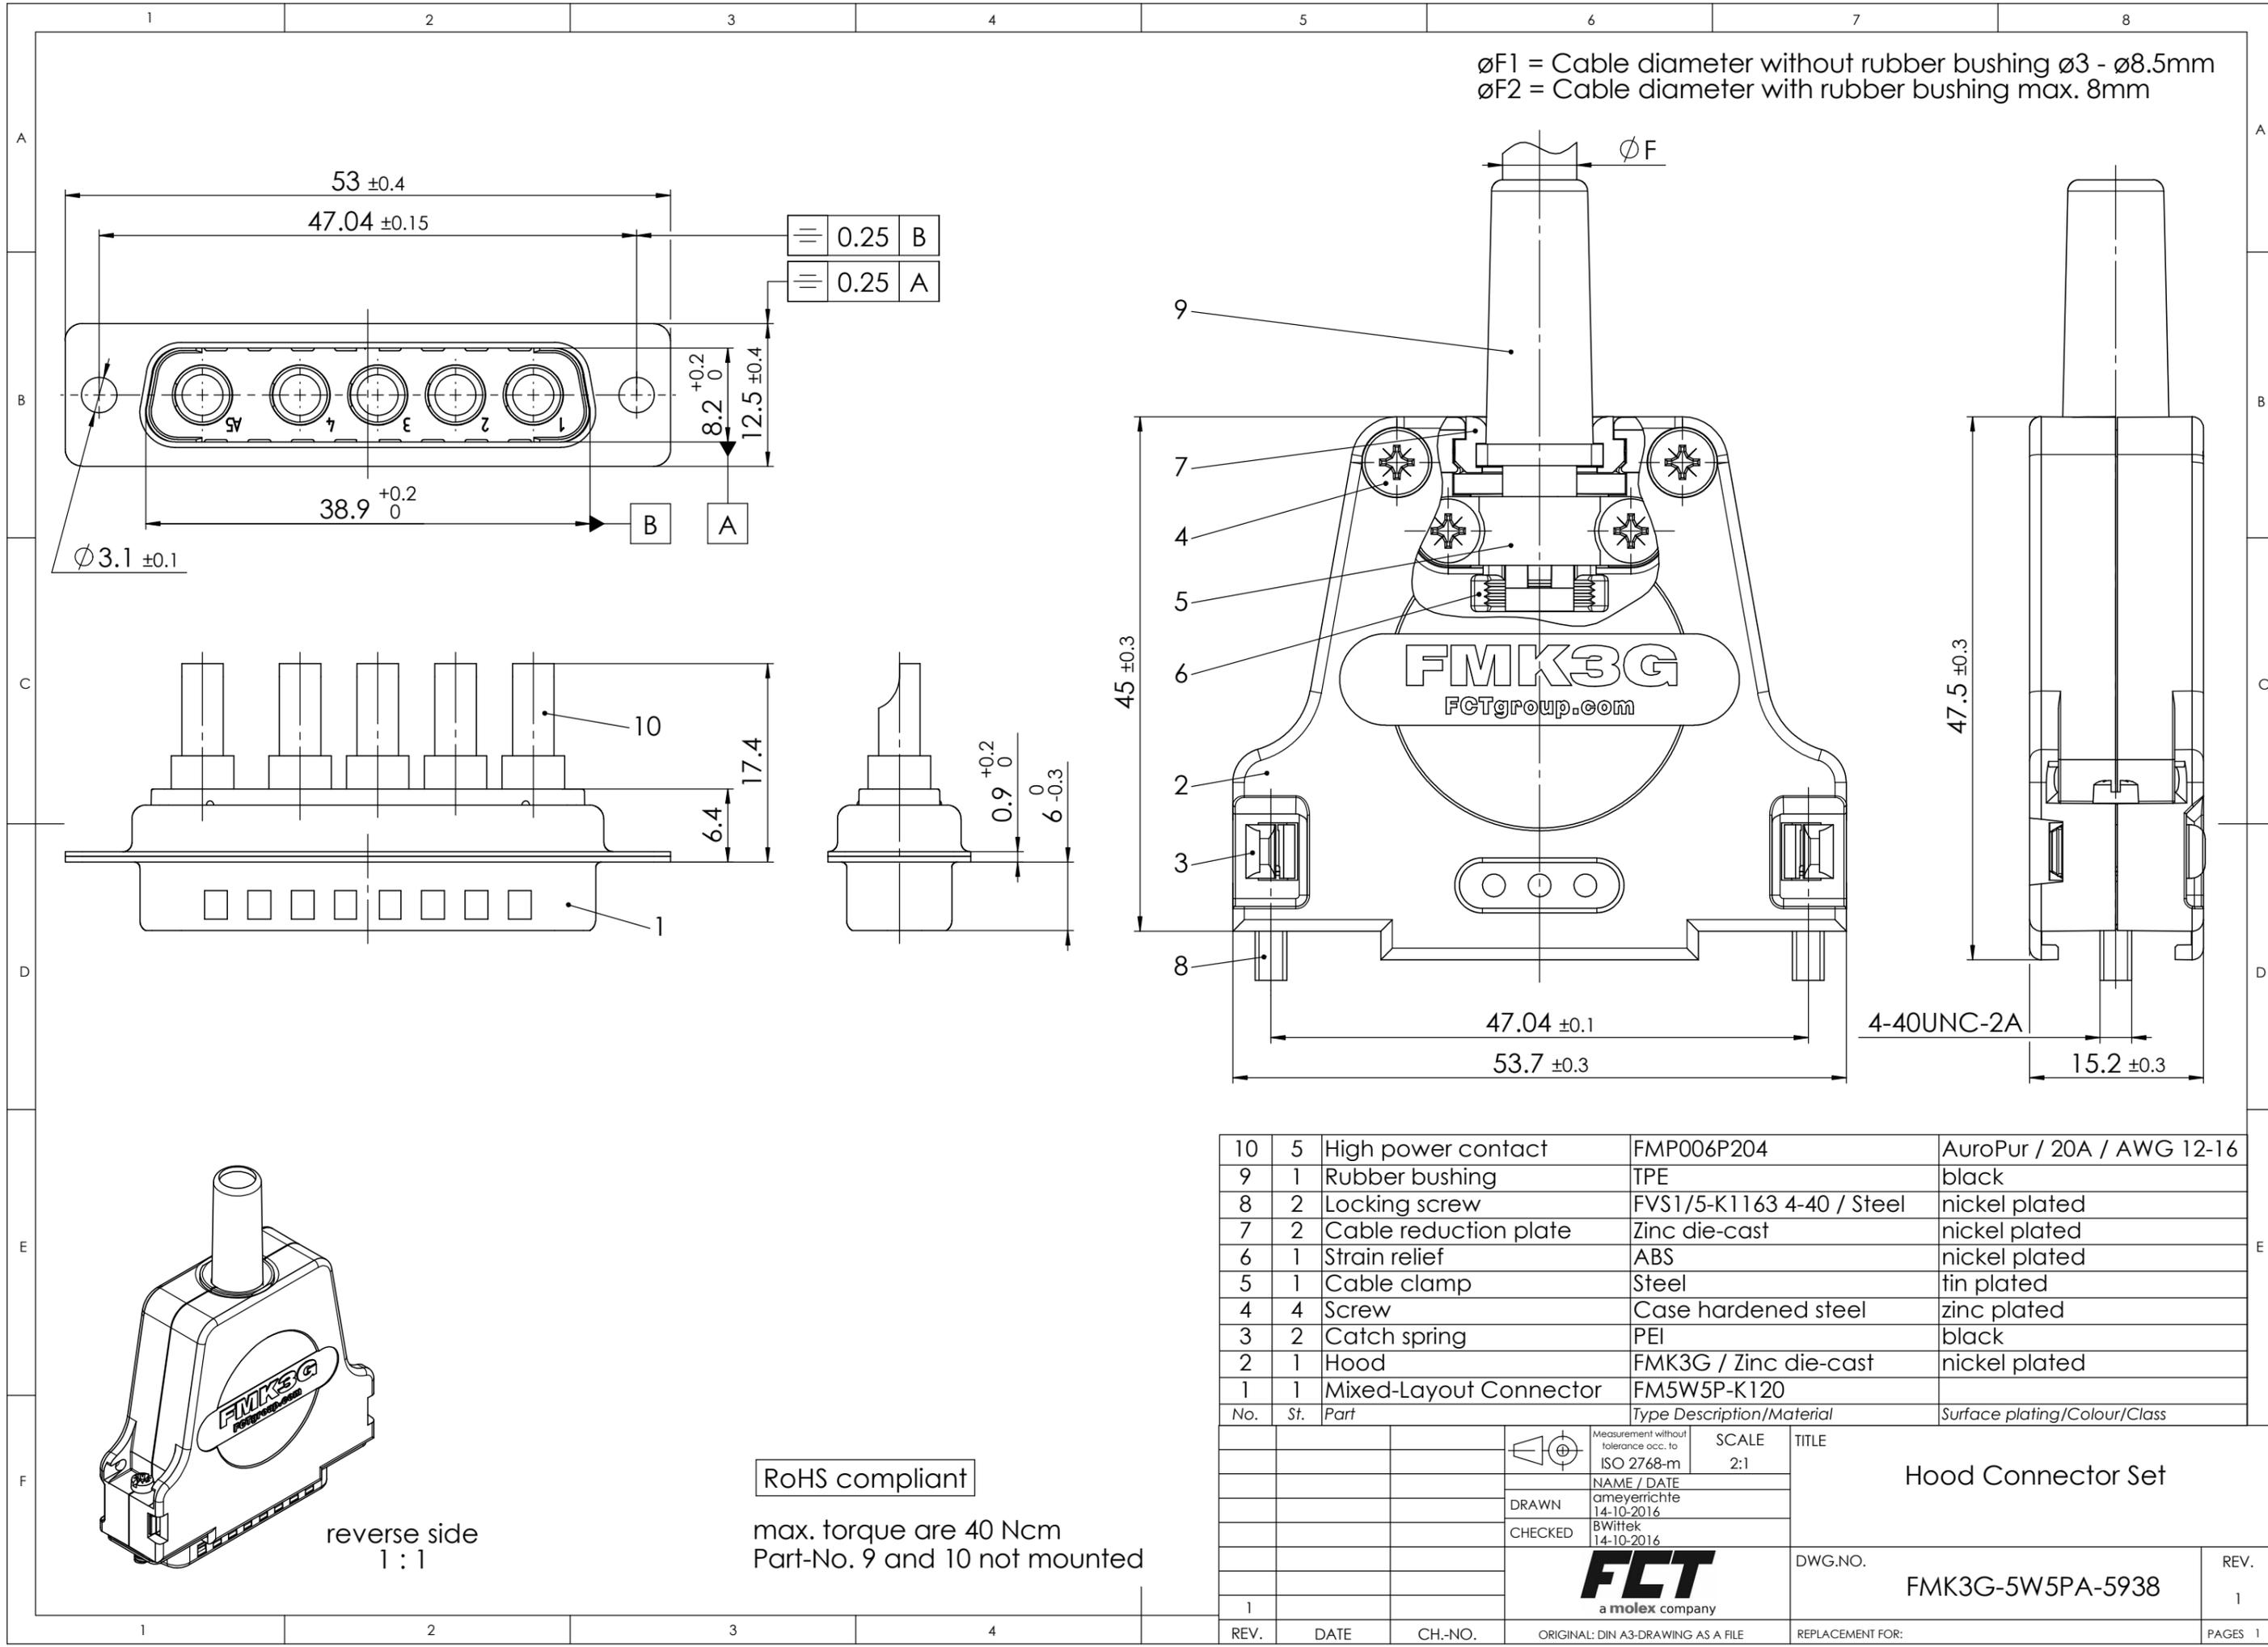

ØF1 = Cable diameter without rubber bushing Ø3 - Ø8.5mm
 ØF2 = Cable diameter with rubber bushing max. 8mm

RoHS compliant

max. torque are 40 Ncm
 Part-No. 9 and 10 not mounted

reverse side
 1 : 1

No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
10	5	High power contact	FMP006P204	AuroPur / 20A / AWG 12-16
9	1	Rubber bushing	TPE	black
8	2	Locking screw	FVS1/5-K1163 4-40 / Steel	nickel plated
7	2	Cable reduction plate	Zinc die-cast	nickel plated
6	1	Strain relief	ABS	nickel plated
5	1	Cable clamp	Steel	tin plated
4	4	Screw	Case hardened steel	zinc plated
3	2	Catch spring	PEI	black
2	1	Hood	FMK3G / Zinc die-cast	nickel plated
1	1	Mixed-Layout Connector	FM5W5P-K120	

REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE	REPLACEMENT FOR:	PAGES
1					1

Measurement without tolerance occ. to ISO 2768-m SCALE 2:1 TITLE NAME / DATE ameyerrichte 14-10-2016 DRAWN BWittek 14-10-2016 CHECKED FCT a molex company	DWG.NO. FMK3G-5W5PA-5938	REV. 1
---	------------------------------------	-----------