



# Terminal Block (Spring Clamp) 20.5701M/xx-E

- 300V 10A UL
- UL94-V0
- PA66
- 5.0mm Pin Pitch
- RoHS Compliant
- xx = Number of Poles (available from 2~24 poles)



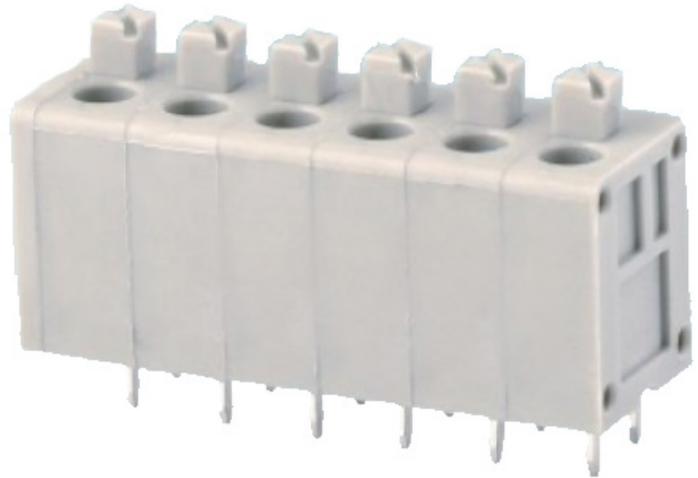


## Technical Data

Pitch	5.00mm
UL Rating	300V 10Amps
IEC Rating	250V 10Amps
Spring	Stainless Steel
Solder Pin	Brass, Tin Plated
Wire Range	20-16AWG (0.5-1.5mm <sup>2</sup> )
PCB Hole Diameter	1.2mm
Strip Length	9-10mm
Screw Torque	n/a
Insulation Voltage	AC2000V / 1 Min
Impulse / Surge Voltage	4kV
Initial Contact Resistance	20mΩ (typical)
Insulation Resistance	500mΩ / DC500V
Temperature Range	-40 to +105°C

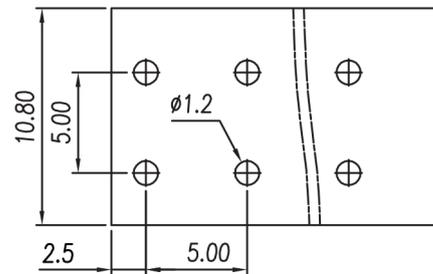

PCB LAYOUT

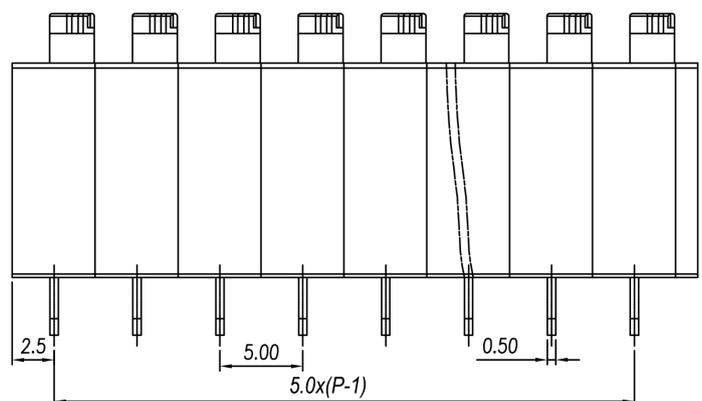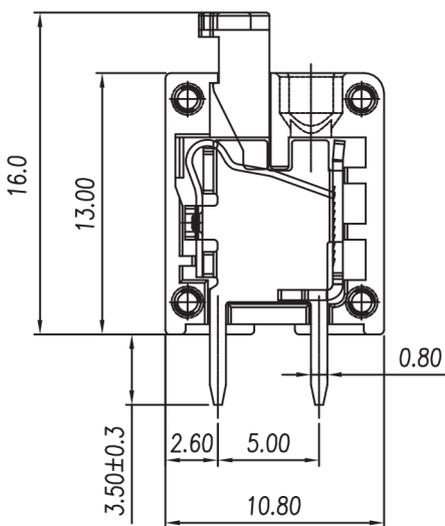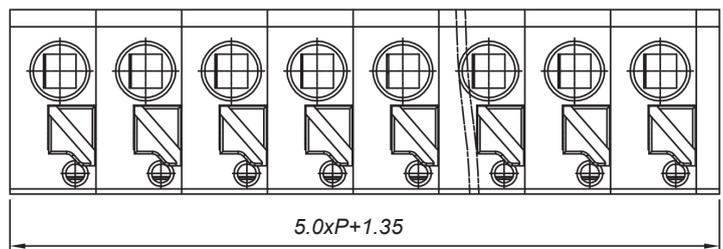

Dimensions shown in mm      P = No of Poles

Supplied in grey as standard  
Other colour options and printing may be available depending on quantity  
Please contact IMO for further information