


D-Sub Connectors and Backshells

multicomp^{PRO}

RoHS
Compliant

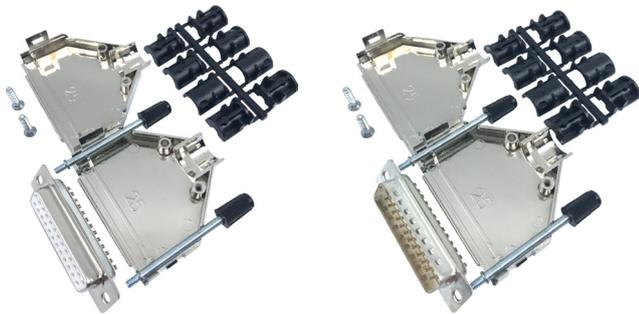

D-Sub Connector with Backshell



Backshell

Features

- Available in sizes 9, 15, 25 and 37
- Minimise interference from electromagnetic and RF sources
- Non-static parts avoid ESD problems
- Accept round foil and braided cable types
- Approved according VDE 0871, FCC 20780 and 89/336/EU
- Long Jackscrews with UNC 4-40 Thread as Standard
- No special assembly tools required

Specifications

Backshell

Material	: ABS, Ni-plated
Temperature Range	: -40°C to 105°C
Cable Strain Relief	: Polycarbonate, PC UL94 V0
Cable Diameter	: 3mm to 13mm
Locking Screws	: Long jackscrews UNC 4-40
Jackscrew Colour	: Black
Assembly Screws	: Self tapping
Cable Outlet	: Straight
Attenuation Factor	: > 40 dB between 30 MHz and 1GHz

D-Sub Solder Connector


Insulator	: PBT, UL94 V-0
Shell	: Steel, Tin-plated
Contact Pins	: Copper alloy
Contact Plating	: Selective Gold over Nickel
Temperature Range	: -55°C to +105°C
Insulator Resistance	: 1000M
Withstand Voltage	: 1kV for 1 min
Stamped Contacts	: Class 3, 100 inserts minimum

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp^{PRO}

D-Sub Connectors and Backshells

Diagram

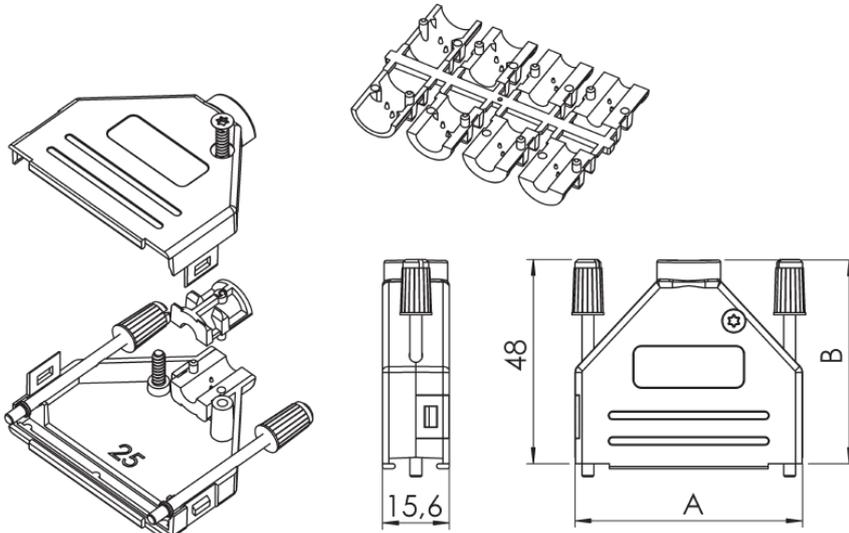

Dimensions : Millimetres

Part Number	A	B
MP002016	31	38,3
MP002017	39,3	40,5
MP002018	53	47,8
MP002019	69,5	52,2

Part Number Table

Description	Part Number
D Sub Backshell, Metalized Plastic, DE-9, Straight	MP002016
D Sub Backshell, Metalized Plastic, DA-15, Straight	MP002017
D Sub Backshell, Metalized Plastic, DB-25, Straight	MP002018
D Sub Backshell, Metalized Plastic, DC-37, Straight	MP002019
D Sub Connector with Backshell, DE-9, Straight, Female	MP002040
D Sub Connector with Backshell, DE-9, Straight, Male	MP002041
D Sub Connector with Backshell, DA-15, Straight, Female	MP002042
D Sub Connector with Backshell, DA-15, Straight, Male	MP002043
D Sub Connector with Backshell, DB-25, Straight, Female	MP002044
D Sub Connector with Backshell, DB-25, Straight, Male	MP002045
D Sub Connector with Backshell, DC-37, Straight, Female	MP002046
D Sub Connector with Backshell, DC-37, Straight, Male	MP002047

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.