


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE INFORMATION CONTAINED HEREIN TO BE CORRECT. TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER BEAR'S SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC ASSUMES NO RESPONSIBILITY FOR REPRODUCTION OF THIS DRAWING FOR ANY OTHER USE, OR SUCH INFORMATION IN WHOLE OR IN PART.


SK6274

DATE	REV	REVISION RECORD	APP	DR	CK
6-22-05	NC	ECO 24259	RW	YK	COLF
3-26-10	A	ECO 32294	COLF	BE	SY
10-10-10	B	ECO 52889	CM	CM	CM

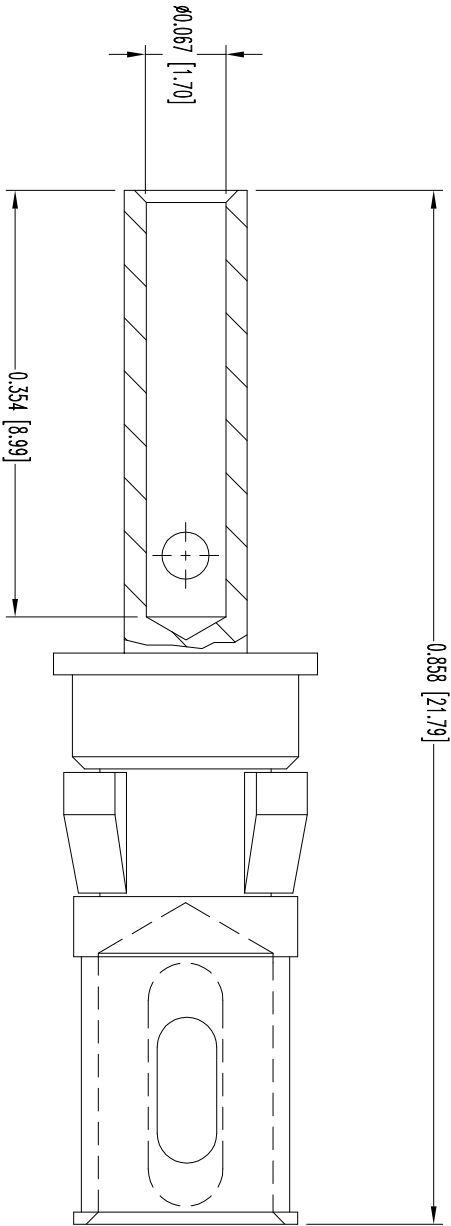

NOTES:

1. MATERIAL AND FINISH:
CONTACT: HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL.
SPRING CLIP: BERYLLIUM COPPER, GOLD FLASH OVER NICKEL PLATE.
RETENTION RING: POLYETHERIMIDE, COLOR BLACK.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.
VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDENSITYCOMBO-D-OR-CONNECTPOSITRONIC.COM.
3. CONTACTS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com FSCM 28198

DECIMAL TOL.		SCALE		DRAWN BY	
± 0.015 [0.38]		N.T.S.		YK	
ANGULAR TOL.		APPROVED BY		RW	
± 5°					

TITLE		DATE		DRAWING NUMBER		REV.	
FC4016D/AA		6-22-05		SK6274		B	