







REV	DOCUMENT	CHANGED BY	CHECK
9	0038225	PRS 04APR08	BLR

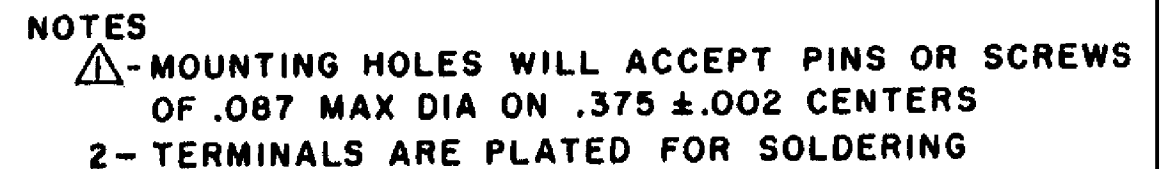

RELEASE NO.	SR - 8884
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	23 OCT 07		<div><div><div></div></div><div><div></div></div></div> <h1>Honeywell</h1>								
OPERATING FORCE – – – – 7 OZ MAX		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	23 OCT 07										
RELEASE FORCE – – – – 2 OZ MIN		30 VOLTS DC RATING				NO PLACE X ± -				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE  SWITCH - BASIC								
DIFFERENTIAL TRAVEL – – – .030 MAX						ONE PLACE .X ± 0.030																
OVERTRAVEL – – – – – .030 MIN		SEA LEVEL 50,000 FT				TWO PLACE .XX ± 0.015																
		INDUCTIVE		3 AMP		2.5 AMP		THREE PLACE .XXX ± 0.005				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV		
		RESISTIVE		5 AMP		5 AMP		FOUR PLACE .XXXX ± -								B	I	111SM1-T2		9		
		MAXIMUM INRUSH 24 AMP				ANGLES ± -				THIRD ANGLE PROJECTION 				RASTER				SCALE	-	WEIGHT .006 LB MAX	SHEET	1 OF 1
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4				UL, CSA	5A, 250 VAC ~							BRAND L4						