

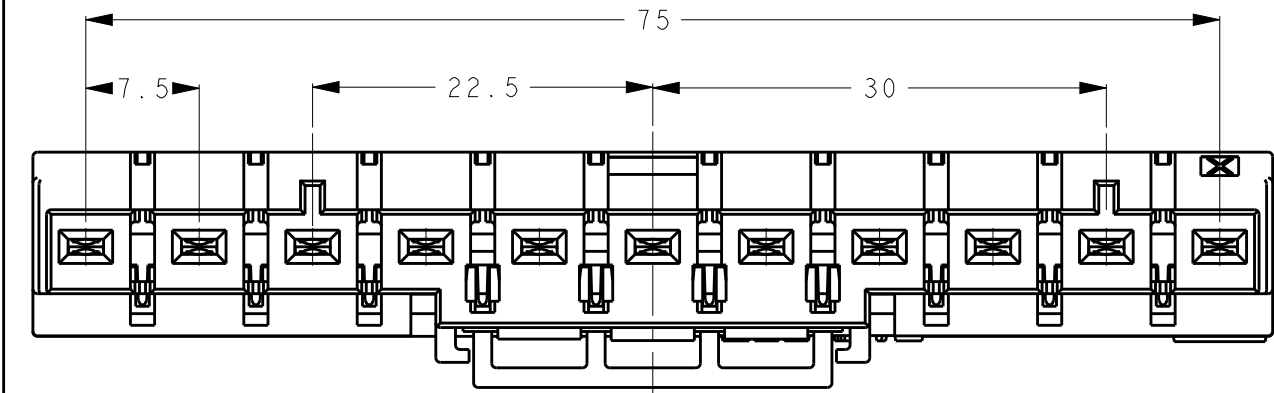
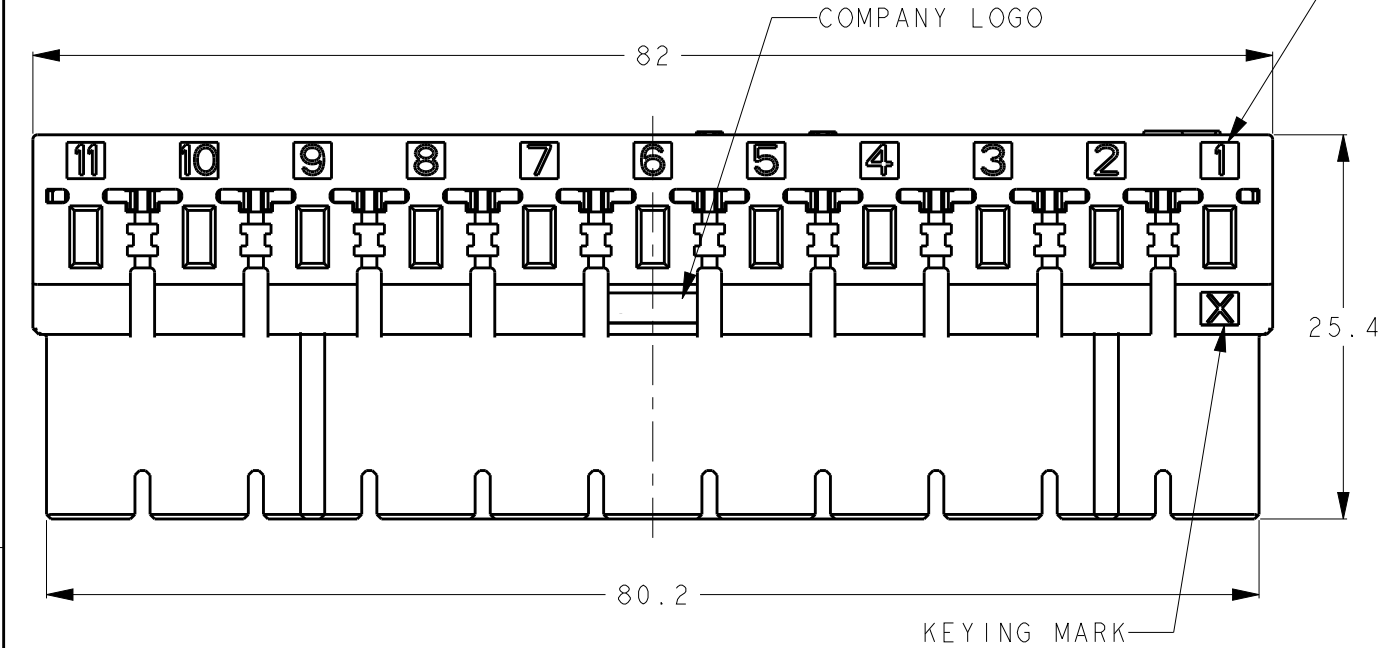


| LOC | DIST | REVISIONS | | | | |
|-----|------|-----------|-----|-------------|-----------|-----|
| | | P | LTR | DESCRIPTION | DATE | DWN |
| J | - | | | | | |
| | | | A | REVISED | 08NOV2013 | Y.O |
| | | | B | REVISED | 12JUN2018 | K.T |
| | | | | | | |
| | | | | | | |

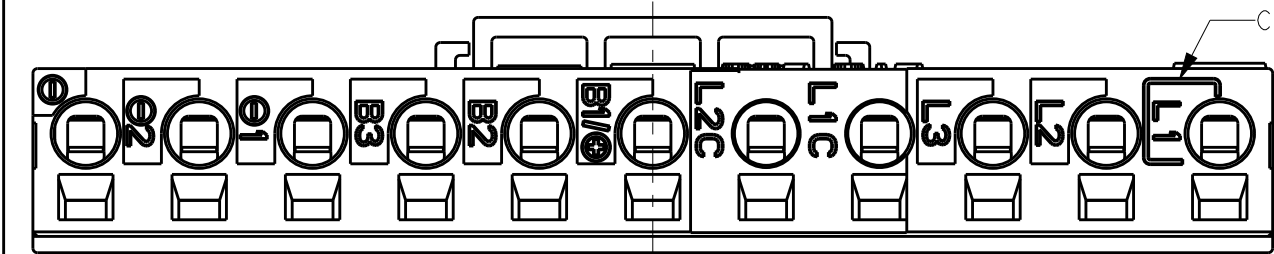


1-2229794-1 (11 POSN KEYING: X) BLACK

CIRCUIT NUMBER

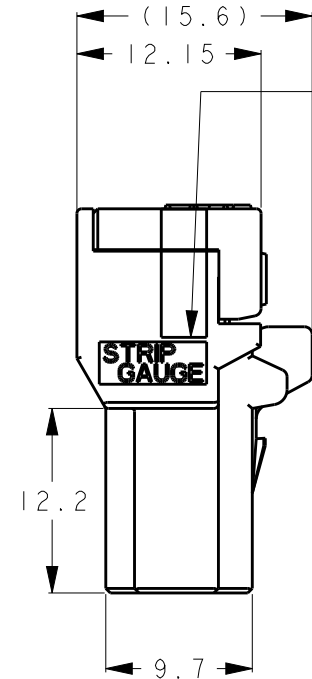

STRIP GAUGE

CIRCUIT MARK

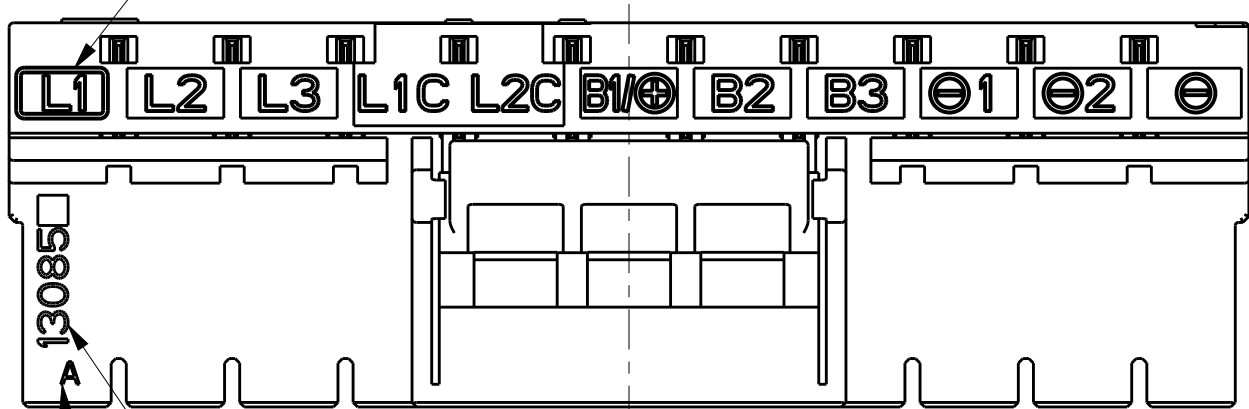


DATE CODE (FIRST 5 DIGITS)
ASSEMBLY MACHINE ID (THE REST)

CAVITY MARK

- 1 MATERIAL
HOUSING: THERMO PLASTICS
CONTACT: COPPER ALLOY
SPRING: STAINLESS
- 2 PLATING
CONTACT POINT: UNDER Ni PLATING, OVER Au PLATING.
WIRE CLAMPING POINT: UNDER Ni PLATING, OVER Tin PLATING.






- 1 材料
ハウジング： 熱可塑性ポリエステル
コンタクト（内部）： 銅合金
スプリング（内部）： ステンレス
- 2 めっき
コンタクト接点部： ニッケル下地めっき上に金めっき
コンタクト電線クランプ部： ニッケル下地めっき上に錫めっき

| | | |
|-----------------|-----------|-------------------|
| Y | 6 | 1-2229794-2 |
| X | 11 | 1-2229794-1 |
| X | 3 | 8-2229794-1 |
| X | 3 | 3-2229794-1 |
| キーイング KEYING | 極数 POS | 型番 PART NUMBER |

| | | | | | |
|--|--|---|---|--|----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN Y. OKADA 20FEB2013 |  TE Connectivity | | |
| | | CHK S. YAMADA 20FEB2013 | | | |
| | | APVD N. YAMASAKI 20FEB2013 | NAME 名称 DYNAMIC D3950 RECEPTACLE ASSEMBLY | | |
| | | PRODUCT SPEC 製品規格 108-78997 | | | |
| | | APPLICATION SPEC 取付適用規格 411-78272 | | | |
| | | WEIGHT - | | | |
| | | CUSTOMER DRAWING | | | |
| | | SCALE 尺度 2:1 | SHEET 1 OF 3 | | REV B |

| | | | |
|----------------------------|--|---|--|
| DIMENSIONS: 単位: 耗 mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | |
| | | 一般公差 ±0.3 | |
| | | 0-PLC ± | |
| | | 1-PLC ±0.5 | |
| | | 2-PLC ±0.13 | |
| | | 3-PLC ±0.013 | |
| | | 4-PLC ±0.000J | |
| | | ANGLES ±5 | |
| MATERIAL 材料 | | FINISH 仕上 | |
| SEE NOTE | | SEE NOTE | |

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|-------------|------|-----|------|
| | | 変更 | | | | | |
| J | - | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | | | | | |

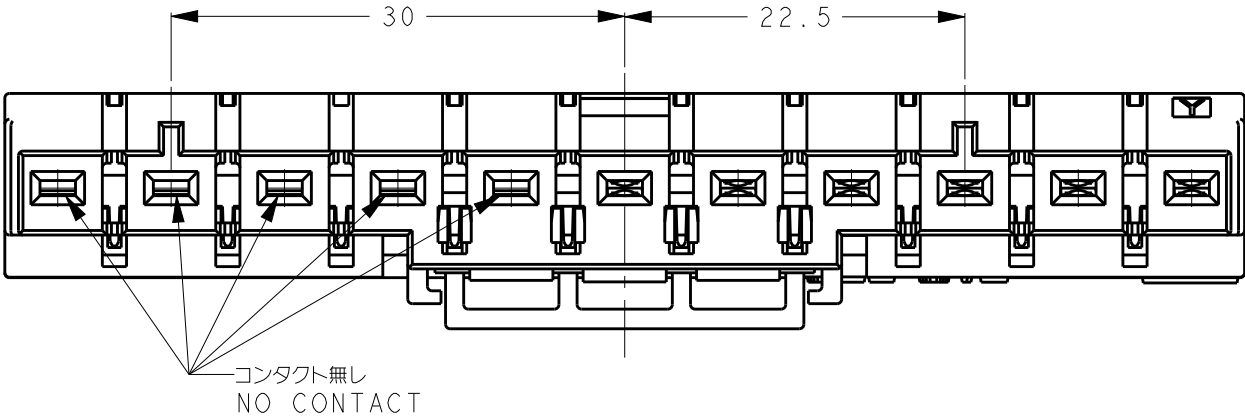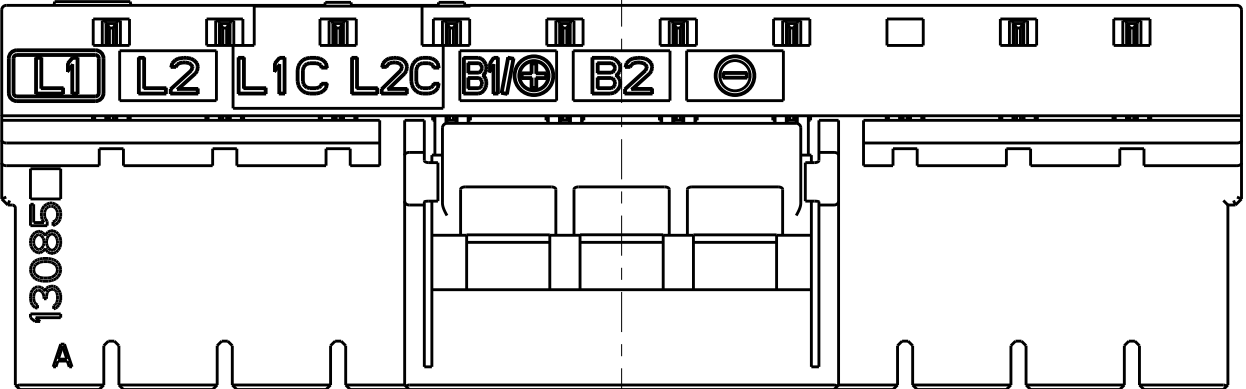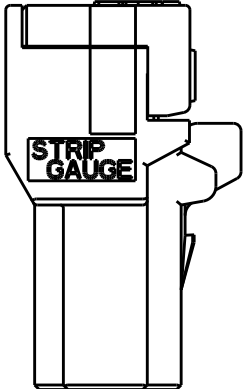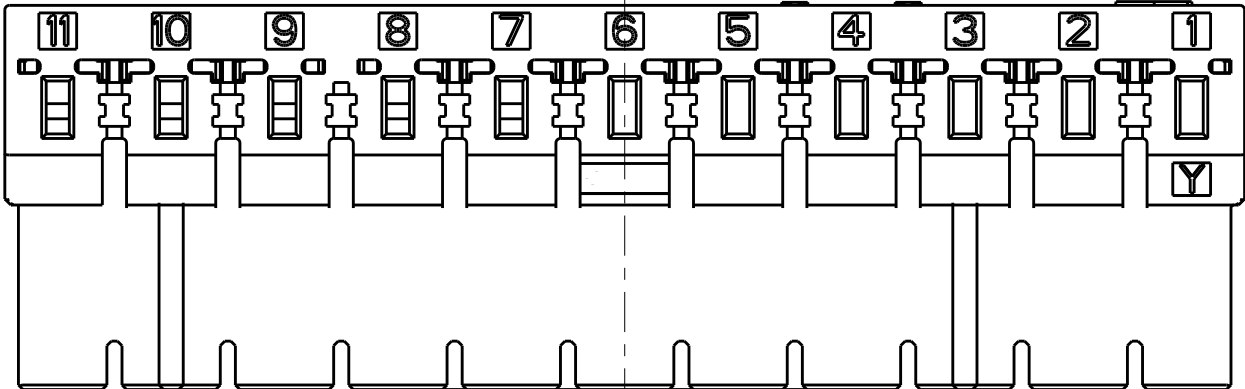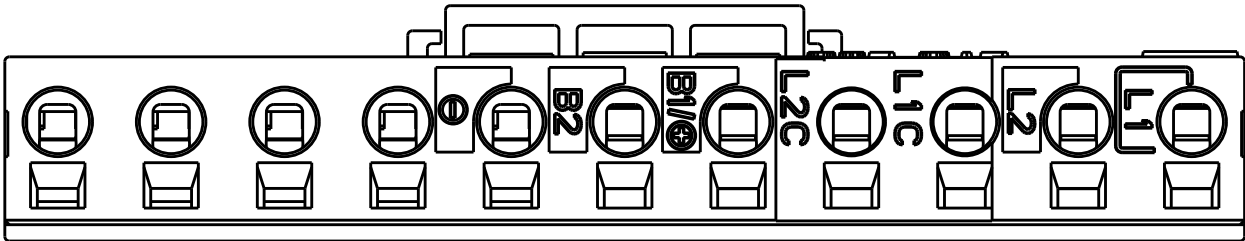

I-2229794-2(6POSN KEYING:Y) BLACK

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

MATERIAL
材料

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

一般公差 ±0.3

0-PLC ±

1-PLC ±0.5

2-PLC ±0.13

3-PLC ±0.013

4-PLC ±0.000J

ANGLES ±5

FINISH
仕上

SEE NOTE

DWN
Y. OKADA 20FEB2013

CHK
S. YAMADA 20FEB2013

APVD
N. YAMASAKI 20FEB2013

PRODUCT SPEC
製品規格
108-78997

APPLICATION SPEC
取付適用規格
411-78272

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
名称
DYNAMIC D3950
RECEPTACLE ASSEMBLY
-

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-2229794

RESTRICTED TO
-






SCALE
尺度
1:1

SHEET
2 OF 3

REV
B

1470-19 (3/11)

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|-------------|------|-----|------|
| | | 変更 | | | | | |
| J | - | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | | | | | |

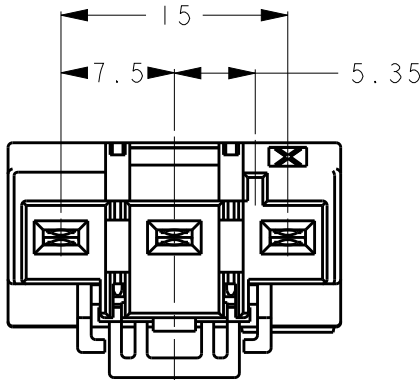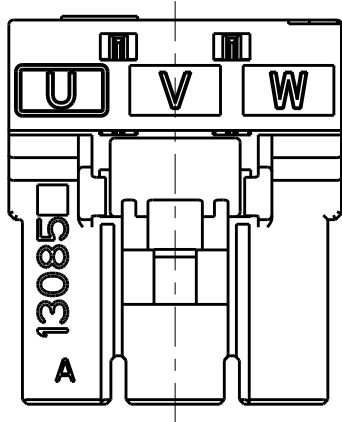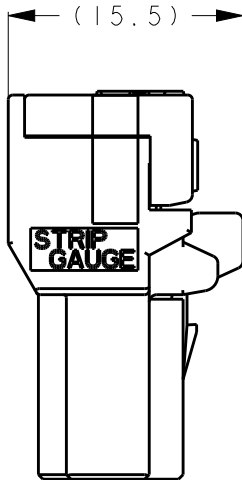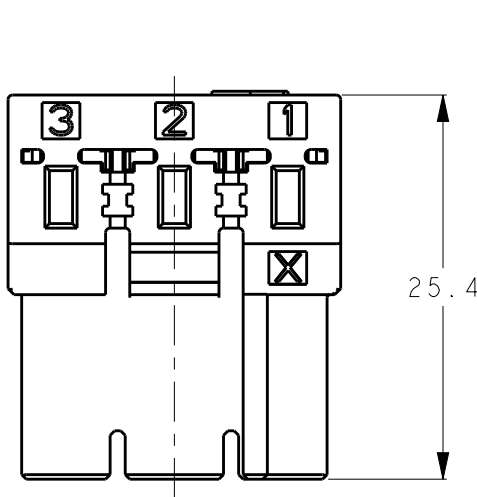

3-2229794-1 (3極 キーイングX) BLACK
8-2229794-1 (3POSN KEYING:X) WHITE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

MATERIAL
材料

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

一般公差 ±0.3

0-PLC ±

1-PLC ±0.5

2-PLC ±0.13

3-PLC ±0.013

4-PLC ±0.0001

ANGLES ±5

FINISH
仕上

SEE NOTE

DWN Y. OKADA 20FEB2013

CHK S. YAMADA 20FEB2013

APVD N. YAMASAKI 20FEB2013

PRODUCT SPEC
製品規格
108-78997

APPLICATION SPEC
取付適用規格
411-78272

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
名称
DYNAMIC D3950
RECEPTACLE ASSEMBLY
-

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-2229794

RESTRICTED TO
-

SCALE
尺度
2:1

SHEET
3

OF
3

REV
B

1470-19 (3/11)