

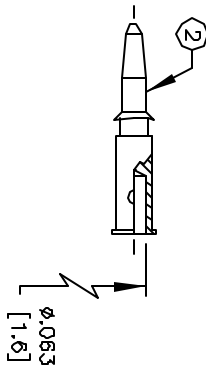



REVISIONS					DOC. NO. SPC-FD05, Total Pages: 2			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
129	A	RELEASED	DJC	5/11/98	JC	7/15/98	JMM	7/15/98

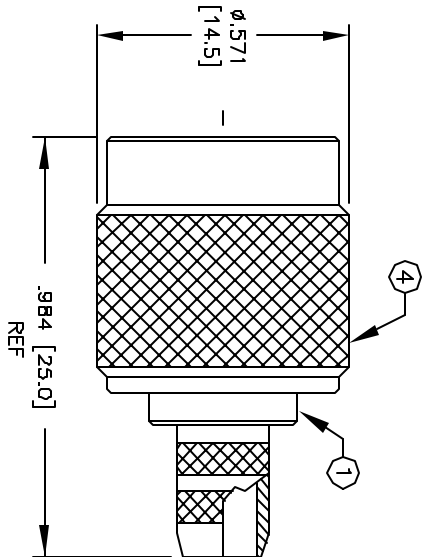

## SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
WORKING VOLTAGE: 500 VRMS @ SEA LEVEL  
FREQUENCY RANGE: 0-7 GHz  
INSERTION LOSS:  $\leq -.2$  dB @ 3 GHz  
VSWR MAX: 1.3:1 @ 3 GHz  
FOR RG-8/X & 30/U, BELDEN 9258, MAXRAD MBX-100 &  
MBX-1000, MICRO 8/U, REMEE 1600, SXTON 8315 &  
TIMES LMR-240 & LMR-240 ULTRAFLEX CABLE

7	FERRULE	1	BRASS	NICKEL
6	RETAINING RING	1	BRASS	NONE
5	GASKET	1	S.I. RUBBER	RED
4	SHELL	1	BRASS	NICKEL
3	DIELECTRIC	1	DELRIIN	NONE
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH

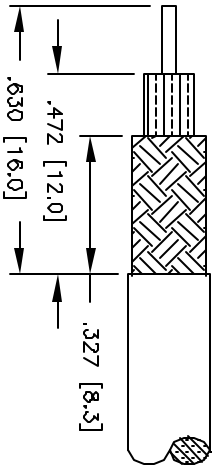

SUGGESTED STRIPPING INSTRUCTIONS  
SUGGESTED CRIMP DIE: .068 & .213

DISCLAIMER  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SOME CONDITIONS OF USE ARE NOTED ON OUR CABLES. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY: DANIEL CAREY

CHECKED BY: JOHN COLE

APPROVED BY: JEFF MCVICKER

DATE: 3/11/98

DATE: 7/15/98

DATE: 7/15/98

DRAWING TITLE: TNC MALE CRIMP

SIZE: A

DWG. NO. 1539

ELECTRONIC FILE 92N3385.DWG

REV A