


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case that the application demands a high level of reliability, such as automotive,  
please contact a company representative for further information.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△										△									
△										△									
△										△									

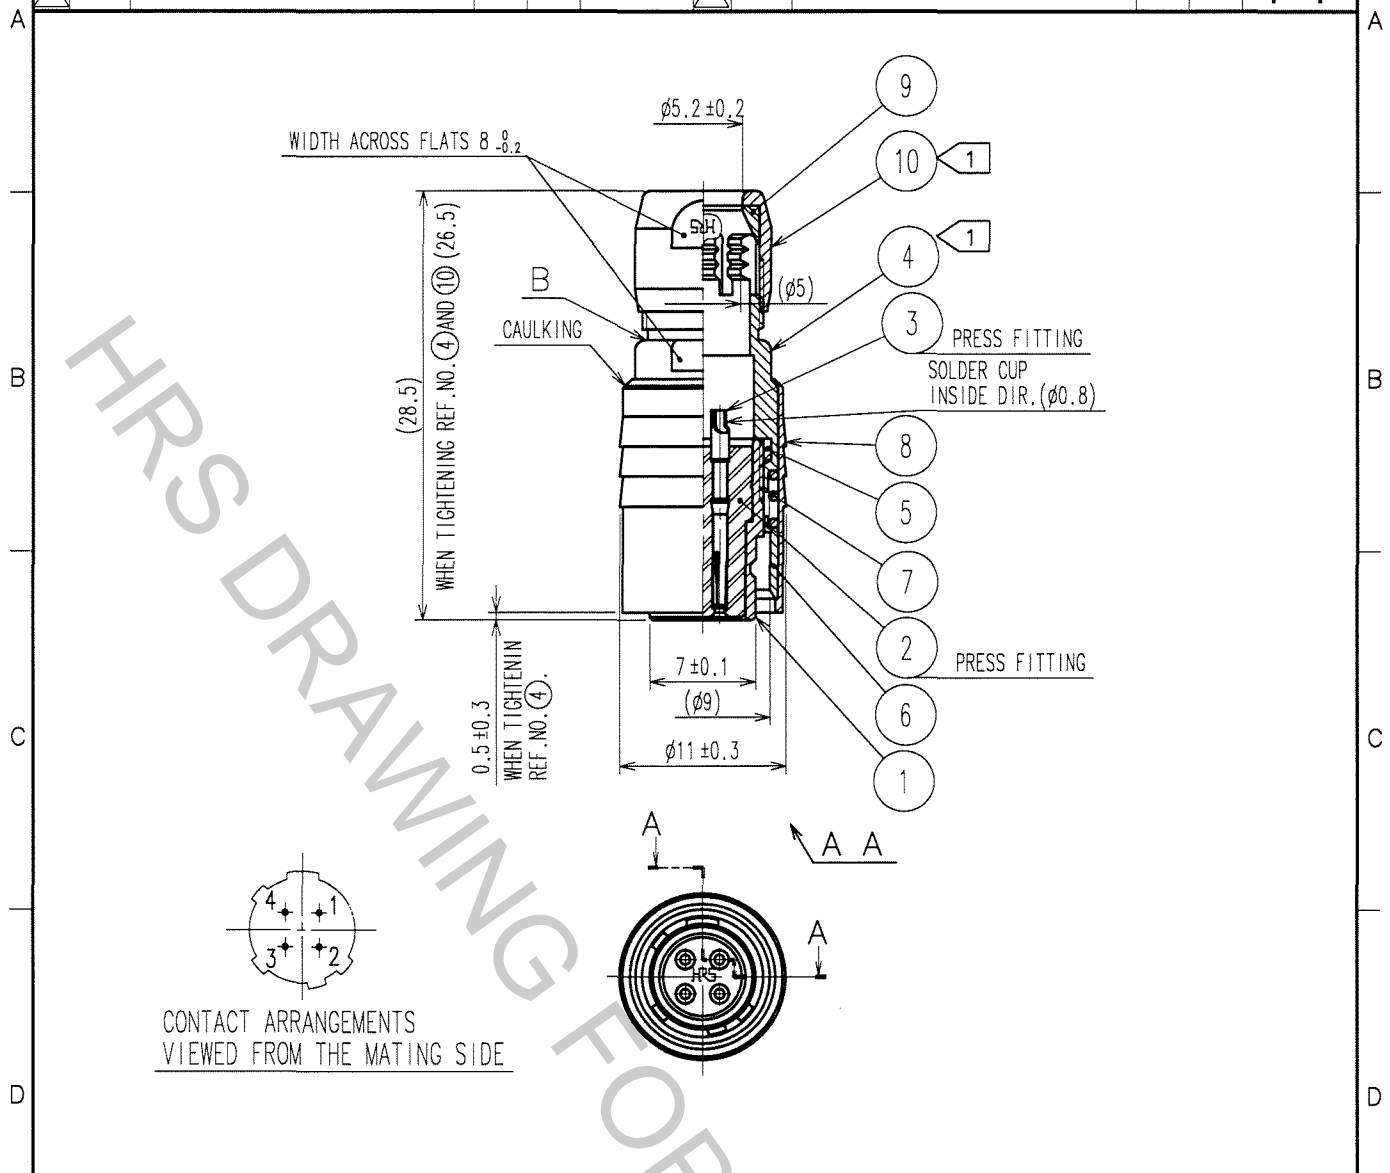

NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ④ AND ⑩ : 1.5 N · m.  
REF. NO. ⑩ SHALL BE TIGHTENED BY TORQUE AFTER  
CLAMPED UNTIL IT TOUCHES THE SURFACE B.  
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ④ AND ⑩ ARE SHOWN.

5	POLYAMIDE		10	BRASS	MATTE FINISH NICKEL PLATED
4	BRASS	MATTE FINISH NICKEL PLATED	9	POLYAMIDE	
3	BERYLLIUM COPPER	GOLD PLATING 0.2μ m min. NICKEL UNDER PLATING 2μ m min.	8	BRASS	MATTE FINISH NICKEL PLATED
2	POLYAMIDE	(BLUE)	7	STEEL	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN D. Matsume '06.04.03	DESIGNED D. Matsume '06.04.03	CHECKED E. Kunii '06.04.04	APPROVED M. Saito '06.04.04	RELEASED
DRAWING NO. EDC4-007757-73		PART NO. HR10-7P-4S(73)				
SCALE 2 : 1		CODE NO. CL110-0022-9-73				
UNITS mm		1 1				

TO  
R



HIROSE ELECTRIC CO., LTD.