


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
1	DIS-C-000514		T.K E.K		07.02.17						

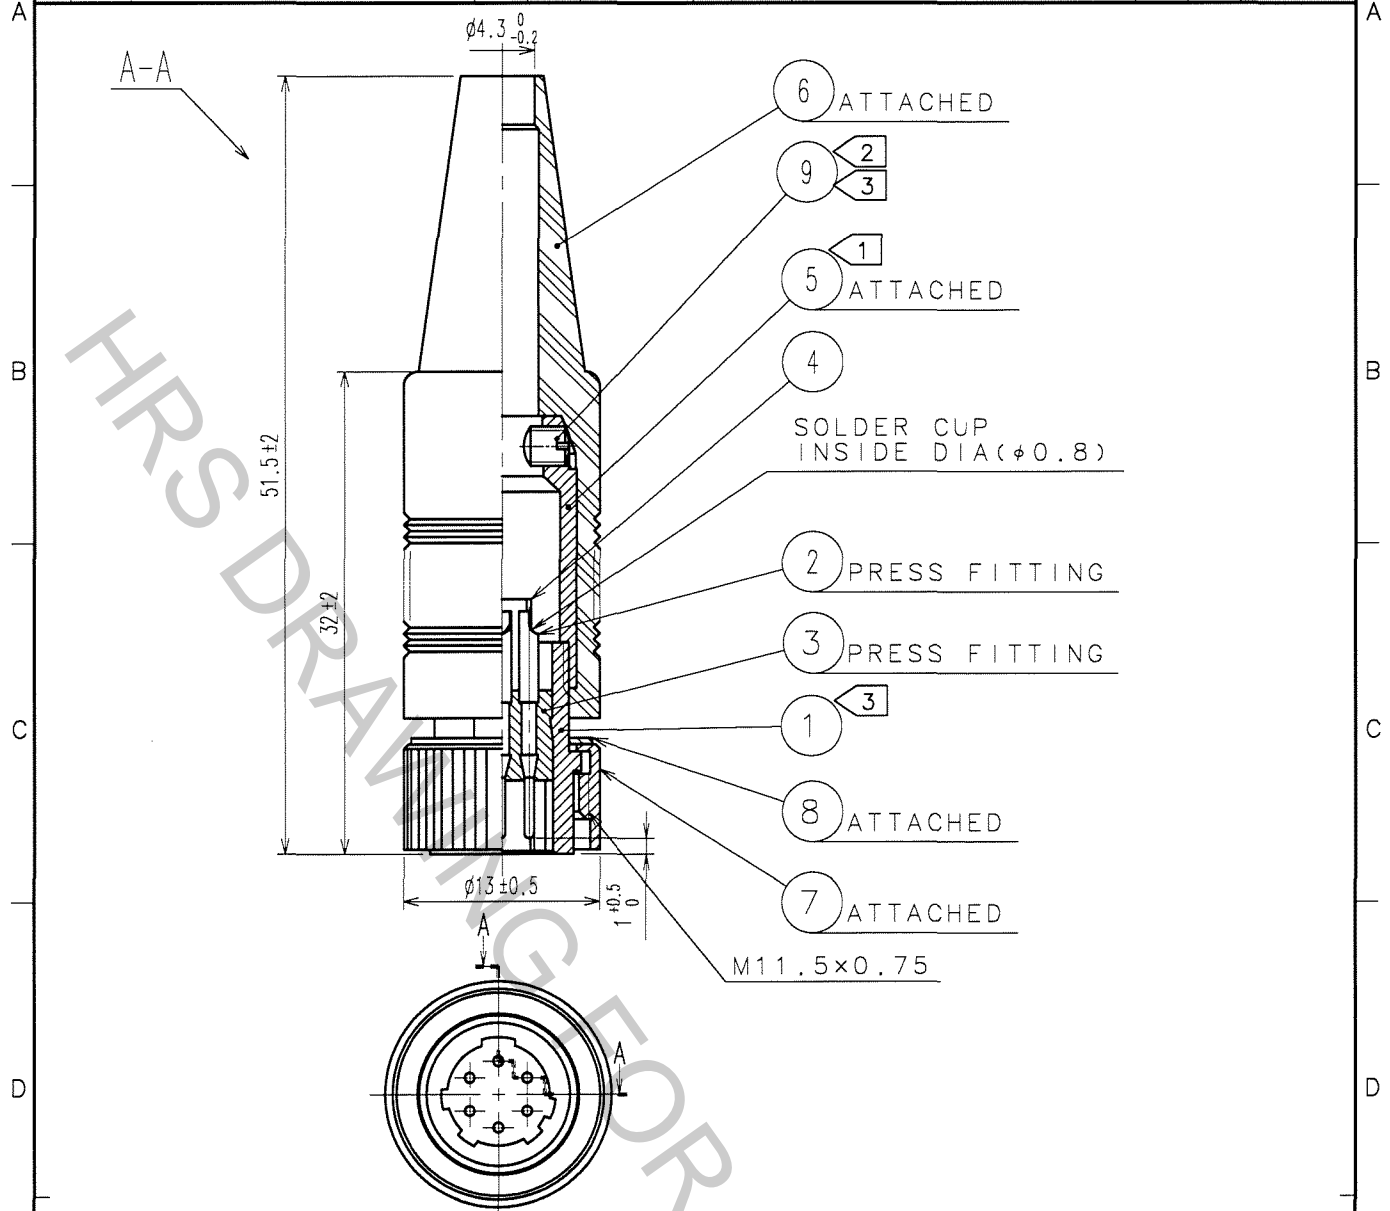

- ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑤ : 1.5N · m.
② THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑨ : 0.1~0.15N · m.
③ LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO PREVENT REF ① AND ⑨ FROM LOOSENING.
4 ROTATION EXAMPLES OF REF NO. ① AND NO. ⑤ ARE SHOWN.

5	BRASS	NICKEL PLATING			
4	POLYTETRAFLUOROETHYLENE		9	STEEL	NICKEL PLATING JIS B 1117 M2.6×0.45×3 SLOTTED SET SCREWS
3	POLYACSTAL		8	BRASS	CHROME PLATING
2	BRASS	SURFACE PLATING: GOLD PLATING 0.2μ m min. UNDER PLATING: NICKEL PLATING 3μ m min.	7	BRASS	CHROME PLATING
1	ZINC ALLOY	NICKEL PLATING	6	CHLOROPRENE RUBBER (BLACK)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN T.KOMATSU 06.07.19	DESIGNED T.KOMATSU 06.07.19	CHECKED .	APPROVED M.SATO 06.07.19	RELEASED
DRAWING NO. EDC4-005938-74		PART NO. SR30-10PE-6P(74)				
SCALE 2 : 1		CODE NO. CL103-0258-7-74				1/1
UNITS mm		HRS HIROSE ELECTRIC CO.,LTD.				

TO
R