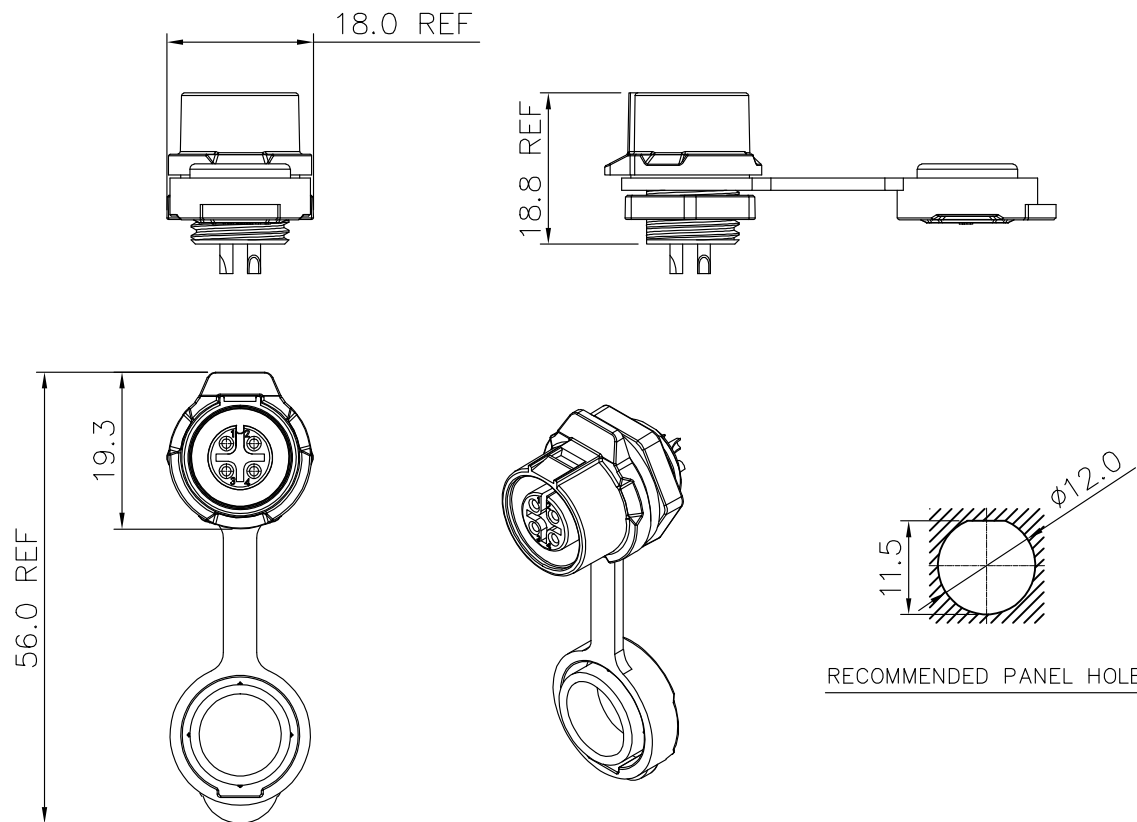










REV	MODIFICATION	DATE	DRAW	APPROVE



SPECIFICATIONS:
Current Rating: PIN Number-A 5A; PIN Number-B 3A
Operating Voltage: 125V MAX.
Dielectric Withstanding Voltage: 1500V MAX.
Contact Resistance: 10mΩ MAX.
Cable OD: Ø3.0-Ø6.0mm
Waterproof Standard: IP 67

RECOMMENDED PANEL HOLE

								2	Contact	Phosphor Bronze	Gold Ptd.	2-8		
								1	Housing	PBT		3		
								No.	Description	Material	Treat	Q'ty		
								-TOLERANCES- UNLESS OTHERWISE SPECIFIED			<div>Lumberg</div> <div>passion for connections</div>			
								X.X ±0.25	X* REF ± 5°					
								X.XX ±0.15	X.* ± 3°					
								X.XXX±0.05	X'X' ± 1°					
								DRAWN	ROBIN	02/01/2018		TITLE: LP12 Serie 270 Female Socket With Single Hole(All Plastic)		
								CHECKED		PRODUCT NO. ---				
								APPROVED		FILE NAME: ---				
								SCALE: AS SHOWN		UNIT: mm	PORJ. 	SIZE A4	REV. A	SHEET. A/A

TYPE	PIN NUMBER-A (5A)					PIN NUMBER-B(3A)	
P/N:	0270 02	0270 03	0270 04	0270 05	0270 06	0270 07	0270 08
Female Contact Face View							
Number Of Contact	2	3	4	5	6	7	8

1

2

3

4

5








6

7

8

9

10

TYPE	PIN NUMBER-A (5A)					PIN NUMBER-B(3A)	
P/N:	0270 02	0270 03	0270 04	0270 05	0270 06	0270 07	0270 08
Female Contact Face View							
Number Of Contact	2	3	4	5	6	7	8